


**SOUTHWEST FLORIDA WATER MANAGEMENT DISTRICT
 BID NUMBER RFB 1816
 CROOKED LAKE WELL SITE PHASE 2 – HYDROGEOLOGICAL INVESTIGATION OF THE LOWER FLORIDAN
 AQUIFER IN POLK COUNTY, FLORIDA**

**FIGURE 5
 SIGN SPECIFICATIONS**

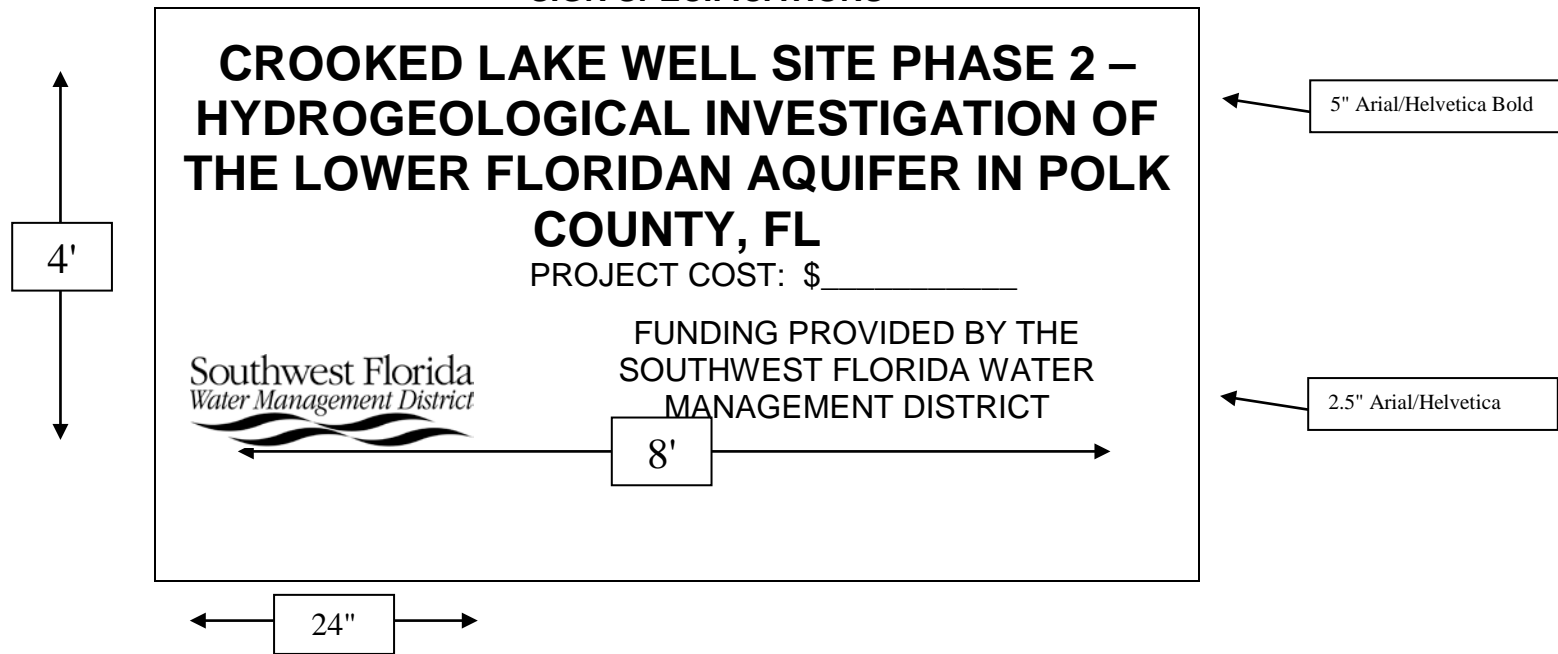

Project Sign Specifications

Contractor must provide one 8' wide x 4' high sign with logo and verbiage provided by the District. The sign shall be constructed of high-density 3/4-inch exterior plywood (painted with exterior white), or white weather- and wind-resistant equivalent (corrugated plastic or other durable material), medium density 1/2" water-resistant board, or heavy duty 10mm coroplast. Sign must be mounted and braced with pressure-treated lumber as necessary and maintained and kept in presentable condition for the duration of the Project. The sign must be in place prior to commencement of work. If painted, the paint must be exterior type enamel. The sign must have a white background with black lettering, vinyl cut out or professionally hand-painted. The sign will be constructed and installed by the Contractor in a location approved by the District. The SWFWMD seal (12" color vinyl decal) is available through your SWFWMD liaison; the SWFWMD logotype (shown above as example) is available as digital file download for vinyl cut out process at www.WaterMatters.org/logo.

Location

One sign shall be constructed and installed at the entrance to the Project area. The sign shall be placed at the Crooked Lake Well site, 5704 US-27, Lake Wales, Florida 33859. The sign shall be viewable from US 27. The location of the sign shall be approved by a SWFWMD representative prior to installation.