Hydrologic Conditions

for the month of

October 2013

Prepared by the

Hydrologic Data Section

Data Collection Bureau

Southwest Florida Water Management District

November 19, 2013

http://www.watermatters.org

ACKNOWLEDGMENTS

The Hydrologic Conditions Report is a monthly effort of the Data Collection Bureau's Hydrologic Data Section. Acknowledgment is made to the following staff for their significant contributions, hard work and dedication to the timely production of this report:

Data Collection:	Terry Burrell, Dave Dunnett, Don Everson, George Prine, Steve Saxon, James Ferrell, Jeff Taylor, Greg Johnston, and Everett Eldridge.
SCADA System:	Mike Katherina.
QA/QC and Reporting:	Margit Crowell, Pam Green, Ken Romie, Steve DeSmith, and Patrick Casey.
Administrative Support/ Document Preparation:	Karen Diez, Roxanne Frey, and Dianna Brass.

TABLE OF CONTENTS

Introduction 1
Executive Summary – Provisional..... 2
Executive Summary 3
Regional Overview 4
Rainfall ..... 5 - 12
Surface Water
- Lakes..... 13 - 20
- Streams..... 21 - 25
- Springs..... 26 - 29

Ground Water
- Surficial Aquifer ..... 30 - 32
- Intermediate and Floridan Aquifers ..... 33 - 42
- Public Supply Wellfields ..... 43 - 44
- Aquifer Resource..... 45 - 46

Water Demand
- Public Supply Surface Water Reservoirs..... 47 - 48
- Reservoirs..... 49 - 54

Appendices
- Rainfall Percentiles by Intervals & Region..... 55 - 56
- Rainfall Grid (NEXRAD)…..... 57
- Lake Monitoring Stations..... 58 - 63
- Stream Monitoring Stations..... 64 - 65
- Description of Stream Monitoring Stations ..... 66 - 69
- Springs Monitoring Stations ..... 70 - 71
- Description of Springs Monitoring Stations..... 72 - 73
- Surficial Aquifer Monitoring Stations..... 74 - 75
- Groundwater & Aquifer Resource Monitoring Stations..... 76 - 77
- Wellfield Groundwater Monitoring Stations ..... 78 - 80
- Reservoir Locations…….....……..... 81

INTRODUCTION

The Hydrologic Conditions Report is generated monthly by the Hydrologic Data Section, Data Collection Bureau, of the Southwest Florida Water Management District. This report provides an end-of-month analytical summary of regional and temporal variations in the hydrologic conditions across the District's 16-county area for planning and regulatory purposes. In addition, it provides an excellent historical record for long-term local and regional hydrologic analysis.

The Hydrologic Data Section is responsible for the implementation and maintenance of a network of observation and monitoring stations used to track changes in various hydrologic parameters over time. Data collected are used by the regulatory, technical, and analytical sections of the District. Data recently collected and maintained by the section include: station and basin rainfall totals, stream and spring discharge measurements, and surface and ground water levels. Frequency of data collection ranges from hourly to monthly readings. All data collected are processed and analyzed, then uploaded into the Water Management Data Base for general access by the District. The Water Management Data Base is also periodically augmented from the United States Geological Survey's hydrologic data network.

The data presented in this report are monthly rainfall totals, streamflow, springflow, surface and ground water levels, reservoir levels and the Aquifer Resource Index. Associated maps of station locations are at the end of the report in the Appendices. Also reported herein are levels of public supply surface water reservoirs supplemented by various regional utilities. The data contained in this report was collected and analyzed in accordance with generally accepted procedures consistent with applicable scientific and technical standards of practice. The data presented are considered to be the best available at the time of publication and are subject to revision. Any questions about the significance, accuracy, or interpretation of these data should be referred to Granville Kinsman, Manager of the Hydrologic Data Section at (352) 796-7211 or (800) 423-1476, extension 4284.

The data evaluation, analyses and interpretation contained within this report have been prepared or approved by a certified Professional Geologist in accordance with Chapter 492, Florida Statutes.

Steven W. DeSmith 11/14/2013

Registration #PG-1704



Americans with Disabilities Act (ADA)

The Southwest Florida Water Management District (District) does not discriminate on the basis of disability. This nondiscrimination policy involves every aspect of the District's functions, including access to and participation in the District's programs and activities. Anyone requiring reasonable accommodation as provided for in the Americans with Disabilities Act should contact the District's Human Resources Director, 2379 Broad Street, Brooksville, Florida 34604-6899; telephone (352) 796-7211, ext. 4702 or 1-800-423-1476 (FL only), ext. 4702; TDD (FL only) 1-800-231-6103; or email to **ADACoordinator@swfwmd.state.fl.us**.

EXECUTIVE SUMMARY

Provisional Hydrologic Conditions as of November 13, 2013

Provisional rainfall totals are provided for the period of November 1, 2013 through November 12, 2013. The northern region has received an average of 1.01 inches, while the historic mean for the northern region for the month of November is 1.93 inches. The central region has received an average of 0.67 inches, while the historic mean for the central region for November is 1.81 inches. The southern region has received an average of 0.14 inches, while the historic mean for the southern region for November is 1.76 inches. District-wide, rainfall averaged 0.58 inches, while the historic mean for the District for November is 1.84 inches.

Provisional lake level data indicate that during the first 13 days of November, regional water levels have decreased in all regions of the District. Average lake levels in the Northern region decreased an average of 0.14 foot and were 1.06 feet below the base of the normal range. Average lake levels in the Tampa Bay region decreased 0.05 foot and were 1.35 feet above the base of the normal range. Lake levels in the Polk Uplands region decreased 0.10 foot and were 0.42 foot below the base of the normal range. The Lake Wales Ridge region posted an average decrease of 0.20 foot and was 1.21 feet below the base of the normal range.

As of November 11, 2013, provisional streamflow data indicates average streamflow decreased in all three regions of the District, compared to last month's data. Normal streamflow is flow that falls on or between the 25th and 75th percentiles. The average streamflow for the Withlacoochee River near Holder in the northern region was in the normal range at the 44th percentile. The average streamflow for the Hillsborough River near Zephyrhills in the central region was normal at the 58th percentile, while flow in the Peace River at Arcadia in the southern region was normal at the 42nd percentile.

Provisional groundwater data, as of November 11, 2013, indicate that levels in the intermediate and Floridan aquifers decreased in all three regions of the District, compared to last month’s data. Aquifer levels were in the normal range in all three regions. The normal range is defined as levels that fall on or between the 25th and 75th percentiles. The groundwater level in the northern region was at the 54th percentile, while levels in the central and southern regions were at the 67th and 45th percentile, respectively.

EXECUTIVE SUMMARY

Hydrologic Conditions for October 2013

In October, average rainfall totals were at the base of the normal range in the northern region of the District, while they were below-normal in the central and southern regions. The normal range for rainfall is defined by totals that fall on or between the 25th to 75th percentiles of the historical monthly accumulation for each region and where the 50th percentile represents the historical mean. The northern region received an average of 1.27 inches of rainfall, equivalent to the 25th percentile of the historical October record. The central region received an average of 1.07 inches of rainfall, equivalent to the 19th percentile, while the southern region received an average of 1.55 inches of rainfall, equivalent to the 23rd percentile of the historical October record. The District-wide rainfall average of 1.29 inches was equivalent to the 20th percentile of the historical October record.

During the 12-month period from November 1, 2012 through October 31, 2013, the average rainfall totals in the northern region was classified as "drier than normal," while the central and southern regions were classified as “normal.” The northern region received an average of 46.89 inches of rainfall, equivalent to the 22nd percentile of the historical annual record. The central region received an average of 47.66 inches of rainfall, equivalent to the 32nd percentile, while the southern region received an average of 53.70 inches of rainfall, equivalent to the 58th percentile. The District-wide rainfall average of 49.53 inches was equivalent to the 36th percentile of the historical annual record.

Average lake levels in October were below the annual normal range in the Northern, Polk Uplands and Lake Wales Ridge regions of the District, while they were within the annual normal range in the Tampa Bay region. Normal lake levels are defined as levels that fall between the minimum low management level and the minimum flood level. Lake levels in the Northern region increased slightly by an average of 0.02 foot and were 0.92 foot below the base of the annual normal range. Lake levels in the Tampa Bay region decreased an average of 0.47 foot and were 1.39 feet above the base of the annual normal range. Lake levels in the Polk Uplands region decreased 0.21 foot and were 0.32 foot below the base of the annual normal range. Average lake levels in the Lake Wales Ridge region decreased 0.21 foot and ended the month 1.01 feet below the base of the annual normal range.

Total streamflow in regional index streams was within the normal range in all three regions of the District, in October. Normal streamflow is defined as the flow that falls on or between the 25th and 75th percentiles. Streamflow measured at the Withlacoochee River near Holder station in the northern region was in the 40th percentile. Streamflow in the Hillsborough River near Zephyrhills station in the central region was in the 63rd percentile, while total streamflow measured at the Peace River at Arcadia station in the southern region was in the 47th percentile during October.

In October, groundwater data showed that levels in the intermediate and Floridan aquifers were in the normal range in all three regions of the District. The normal range is defined as the level that falls on or between the 25th and 75th percentiles. The groundwater level in the northern region was in the 54th percentile, while levels in the central and southern regions were in the 70th and 54th percentiles, respectively.

REGIONAL OVERVIEW OF HYDROLOGIC CONDITIONS

OCTOBER 2013

Northern Region

In October, the northern region received an average of 1.27 inches of rainfall, equivalent to the 25th percentile of the historical October readings, which is considered "normal." Average lake levels increased slightly in the northern region and ended the month an average of 0.92 foot below the base of the annual normal range. Total streamflow measured in the Withlacoochee River near Holder station increased and was in the 40th percentile. Regional groundwater levels indicated average surficial aquifer water levels decreased and were in the 49th percentile; while levels in the intermediate and Floridan aquifer decreased and were in the 54th percentile.

Central Region

In October, the central region received an average of 1.07 inches of rainfall, equivalent to the 19th percentile of historical October readings, which is considered "drier than normal." Average lake levels decreased in the Tampa Bay region, ending the month 1.39 feet above the base of the normal range, while levels decreased in the Polk Uplands region, ending the month 0.32 feet below the base of the annual range. Total streamflow measured at the Hillsborough River near Zephyrhills station decreased and was in the 63rd percentile. Regional groundwater levels indicated average surficial aquifer water levels decreased and were in the 72nd percentile; while levels in the intermediate and Floridan aquifer decreased and were in the 70th percentile.

Southern Region

In October, the southern region received an average of 1.55 inches of rainfall, equivalent to the 23rd percentile of historical October readings, which is considered "drier than normal." Average lake levels decreased in the Lake Wales Ridge region and ended the month 1.01 feet below the base of the annual normal range. Total streamflow measured at the Peace River at Arcadia station decreased and was in the 47th percentile. Regional groundwater levels indicated average surficial aquifer water levels decreased and were in the 72nd percentile; while levels in the intermediate and Floridan aquifer decreased and were in the 54th percentile.

RAINFALL

The rainfall data used for all tabulations in this report are provided to the District under contract with an external vendor. These data are created by enhancing contractor-developed NEXRAD radar rainfall imagery with hourly rainfall data collected from the District's network of real-time gauges. This process results in highly accurate cell-based rainfall data representative of conditions over the entire District, including those portions where rainfall data collection would otherwise be limited due to gaps in the gauging network.

As defined by the United States Geological Survey (USGS), a percentile is a value on a scale of one hundred that indicates the percent of a distribution that is equal to or below it. For example, a rainfall total equivalent to the 90th percentile is equal to or greater than 90 percent of the rainfall totals recorded for this month during all years that totals have been recorded.

Percentiles for rainfall were calculated from the historical record by region, and by specific interval. The "wet season" total is the sum of the rainfall from June through September. The "dry season" total is the sum of the rainfall from October through May. The annual total characterization was calculated from a dataset of moving 12-month rainfall sum for the same period (1915 through the most recent completed year). The moving 12-month rainfall sum was used for annual statistics because it provided a much larger dataset, and therefore a better estimate of the true percentiles. The historical 12-month cumulative average is updated monthly.

Characterization ranges were established for each region, and for the whole District, with breaks at the 10th (P10), the 25th (P25), the 75th (P75) and the 90th (P90) percentiles. The rainfall in inches for each percentile break, by rainfall interval and by region and the characterization ranges are summarized in the Appendix.

In October, rainfall totals were at the base of the normal range in the northern region, while they were below-normal in the central and southern regions. The normal range for rainfall is defined by totals that fall on or between the 25th to 75th percentiles of the historical monthly average for each region and where the 50th percentile represents the historical mean. The northern region received an average of 1.27 inches of rainfall, equivalent to the 25th percentile of the historical October record. The central region received an average of 1.07 inches, equivalent to the 19th percentile; while the southern region received an average of 1.55 inches, equivalent to the 23rd percentile. District-wide, rainfall averaged 1.29 inches, which is equivalent to the 20th percentile of the historical October record.

During the 12-month period from November 1, 2012 through October 31, 2013, the average rainfall totals in the northern region was classified as “drier than normal,” while the central and southern regions were classified as “normal.” The northern region received an average of 46.89 inches of rainfall, equivalent to the 22nd percentile of the historical record. The central region received an average of 47.66 inches of rainfall, equivalent to the 32nd percentile. The southern region received an average of 53.70 inches of rainfall, equivalent to the 58th percentile. The District-wide rainfall average was 49.53 inches, which is equivalent to the 36th percentile of the historical annual record.

Tampa Monthly Climate Summary for October 2013

According to the National Weather Service, the monthly average temperature (°F) for Tampa was 77.3 degrees, which was 1.1 degrees above normal. The highest temperature recorded during the month was 91 degrees, while the lowest temperature recorded during the month was 58 degrees.

Temperature and Precipitation Outlook

The Climate Prediction Center's (CPC) three-month weather forecast, as of October 17, 2013, indicates below-normal rainfall throughout the District during the composite 3-month period from November 2013 through January 2014. The temperature forecast for this same time-period indicates equal chances for normal or above/below-normal temperatures in all three regions of the District. [Note: Due to the early publication date of November 19, 2013 for this report, the CPC's November 21, 2013 forecast was unavailable].

For more information log on to the CPC's website at:

http://www.cpc.ncep.noaa.gov/products/OUTLOOKS_index.html

RELATIONSHIP OF OCTOBER 2013 RAINFALL TO HISTORICAL RAINFALL AVERAGES

Regional Summary:

Region	*OCT 2013 Average Rainfall*	*Historical Average for OCT*	*Departure from Historical Average*	*Calendar Year 2013 Cumulative Rainfall JAN-OCT*	*Calendar Year Historical Cumulative Rainfall JAN-OCT*	*Departure from Historical Cumulative OCT 2013*	*Cumulative 12-month Rainfall NOV 2012-OCT 2013*	*Historical 12-month Cumulative Rainfall*	*Departure from Historical 12-month Cumulative*
Northern Counties	1.27	2.92	-1.65	44.44	48.97	-4.53	46.89	53.47	-6.58
Central Counties	1.07	2.92	-1.85	45.48	48.06	-2.58	47.66	52.26	-4.60
Southern Counties	1.55	3.14	-1.59	51.17	48.63	2.54	53.70	52.29	1.41
District All Counties	1.29	3.00	-1.71	47.16	48.51	-1.35	49.53	52.61	-3.08

Regional Counties Summary:

NORTHERN COUNTIES	*OCT 2013 Average Rainfall*	*Historical Average for OCT*	*Departure from Historical Average*	*Calendar Year 2013 Cumulative Rainfall JAN-OCT*	*Calendar Year Historical Cumulative Rainfall JAN-OCT*	*Departure from Historical Cumulative OCT 2013*	*Cumulative 12-month Rainfall NOV 2012-OCT 2013*	*Historical 12-month Cumulative Rainfall*	*Departure from Historical 12-month Cumulative*
Levy County	1.20	2.93	-1.73	45.26	48.70	-3.44	49.20	53.71	-4.51
Marion County	1.69	3.04	-1.35	45.40	49.43	-4.03	48.48	54.19	-5.71
Citrus County	0.96	2.85	-1.89	44.48	49.44	-4.96	46.49	53.94	-7.45
Sumter County	1.26	2.88	-1.62	41.01	47.59	-6.58	42.88	51.95	-9.07
Hernando County	1.36	2.95	-1.59	47.01	50.48	-3.47	49.03	54.94	-5.91
CENTRAL COUNTIES									
Pasco County	1.03	2.99	-1.96	48.41	49.60	-1.19	50.54	53.93	-3.39
Pinellas County	0.94	2.95	-2.01	46.55	47.31	-0.76	48.90	51.57	-2.67
Hillsborough County	1.10	2.84	-1.74	46.37	48.43	-2.06	48.62	52.48	-3.86
Polk County	1.08	2.91	-1.83	43.31	48.07	-4.76	45.44	51.92	-6.48
SOUTHERN COUNTIES									
Manatee County	0.98	3.08	-2.10	50.52	49.59	0.93	52.56	53.43	-0.87
Hardee County	0.64	3.08	-2.44	45.03	48.57	-3.54	47.55	52.08	-4.53
Highlands County	1.39	3.52	-2.13	49.74	48.53	1.21	53.53	51.85	1.68
Sarasota County	1.93	3.26	-1.33	53.85	48.79	5.06	56.16	52.55	3.61
DeSoto County	1.83	3.34	-1.51	50.93	48.30	2.63	53.77	51.76	2.01
Charlotte County	3.08	3.46	-0.38	59.12	48.87	10.25	61.35	52.27	9.08

OCTOBER 2013 RAINFALL CHARACTERIZATION

Regional Characterization:

Region	*OCT 2013 Average Rainfall*	*Historical OCT Percentile*	*OCT Rainfall Characterization*	*Cumulative 12-month Rainfall NOV 2012-OCT 2013*	*Historical 12-month Cumulative Percentile*	*12-month Cumulative Rainfall Characterization*
Northern Counties	1.27	25	Normal	46.89	22	Drier than normal
Central Counties	1.07	19	Drier than normal	47.66	32	Normal
Southern Counties	1.55	23	Drier than normal	53.70	58	Normal
District Counties	1.29	20	Drier than normal	49.53	36	Normal

Regional Counties Characterization:

NORTHERN COUNTIES	*OCT 2013 Average Rainfall*	*Historical OCT Percentile*	*OCT Rainfall Characterization*	*Cumulative 12-month Rainfall NOV 2012-OCT 2013*	*Historical 12-month Cumulative Percentile*	*12-month Cumulative Rainfall Characterization*
Levy County	1.20	26	Normal	49.20	34	Normal
Marion County	1.69	36	Normal	48.48	28	Normal
Citrus County	0.96	27	Normal	46.49	23	Drier than normal
Sumter County	1.26	26	Normal	42.88	15	Drier than normal
Hernando County	1.36	32	Normal	49.03	28	Normal
CENTRAL COUNTIES						
Pasco County	1.03	18	Drier than normal	50.54	37	Normal
Pinellas County	0.94	16	Drier than normal	48.90	42	Normal
Hillsborough County	1.10	17	Drier than normal	48.62	36	Normal
Polk County	1.08	15	Drier than normal	45.44	24	Drier than normal
SOUTHERN COUNTIES						
Manatee County	0.98	12	Drier than normal	52.56	49	Normal
Hardee County	0.64	9	Very dry	47.55	33	Normal
Highlands County	1.39	20	Drier than normal	53.53	58	Normal
Sarasota County	1.93	35	Normal	56.16	68	Normal
DeSoto County	1.83	35	Normal	53.77	59	Normal
Charlotte County	3.08	58	Normal	61.35	85	Wetter than normal

OCTOBER 2013 RAINFALL HISTORIC AVERAGE VS HISTORICAL OCTOBER AVERAGE (INCHES)

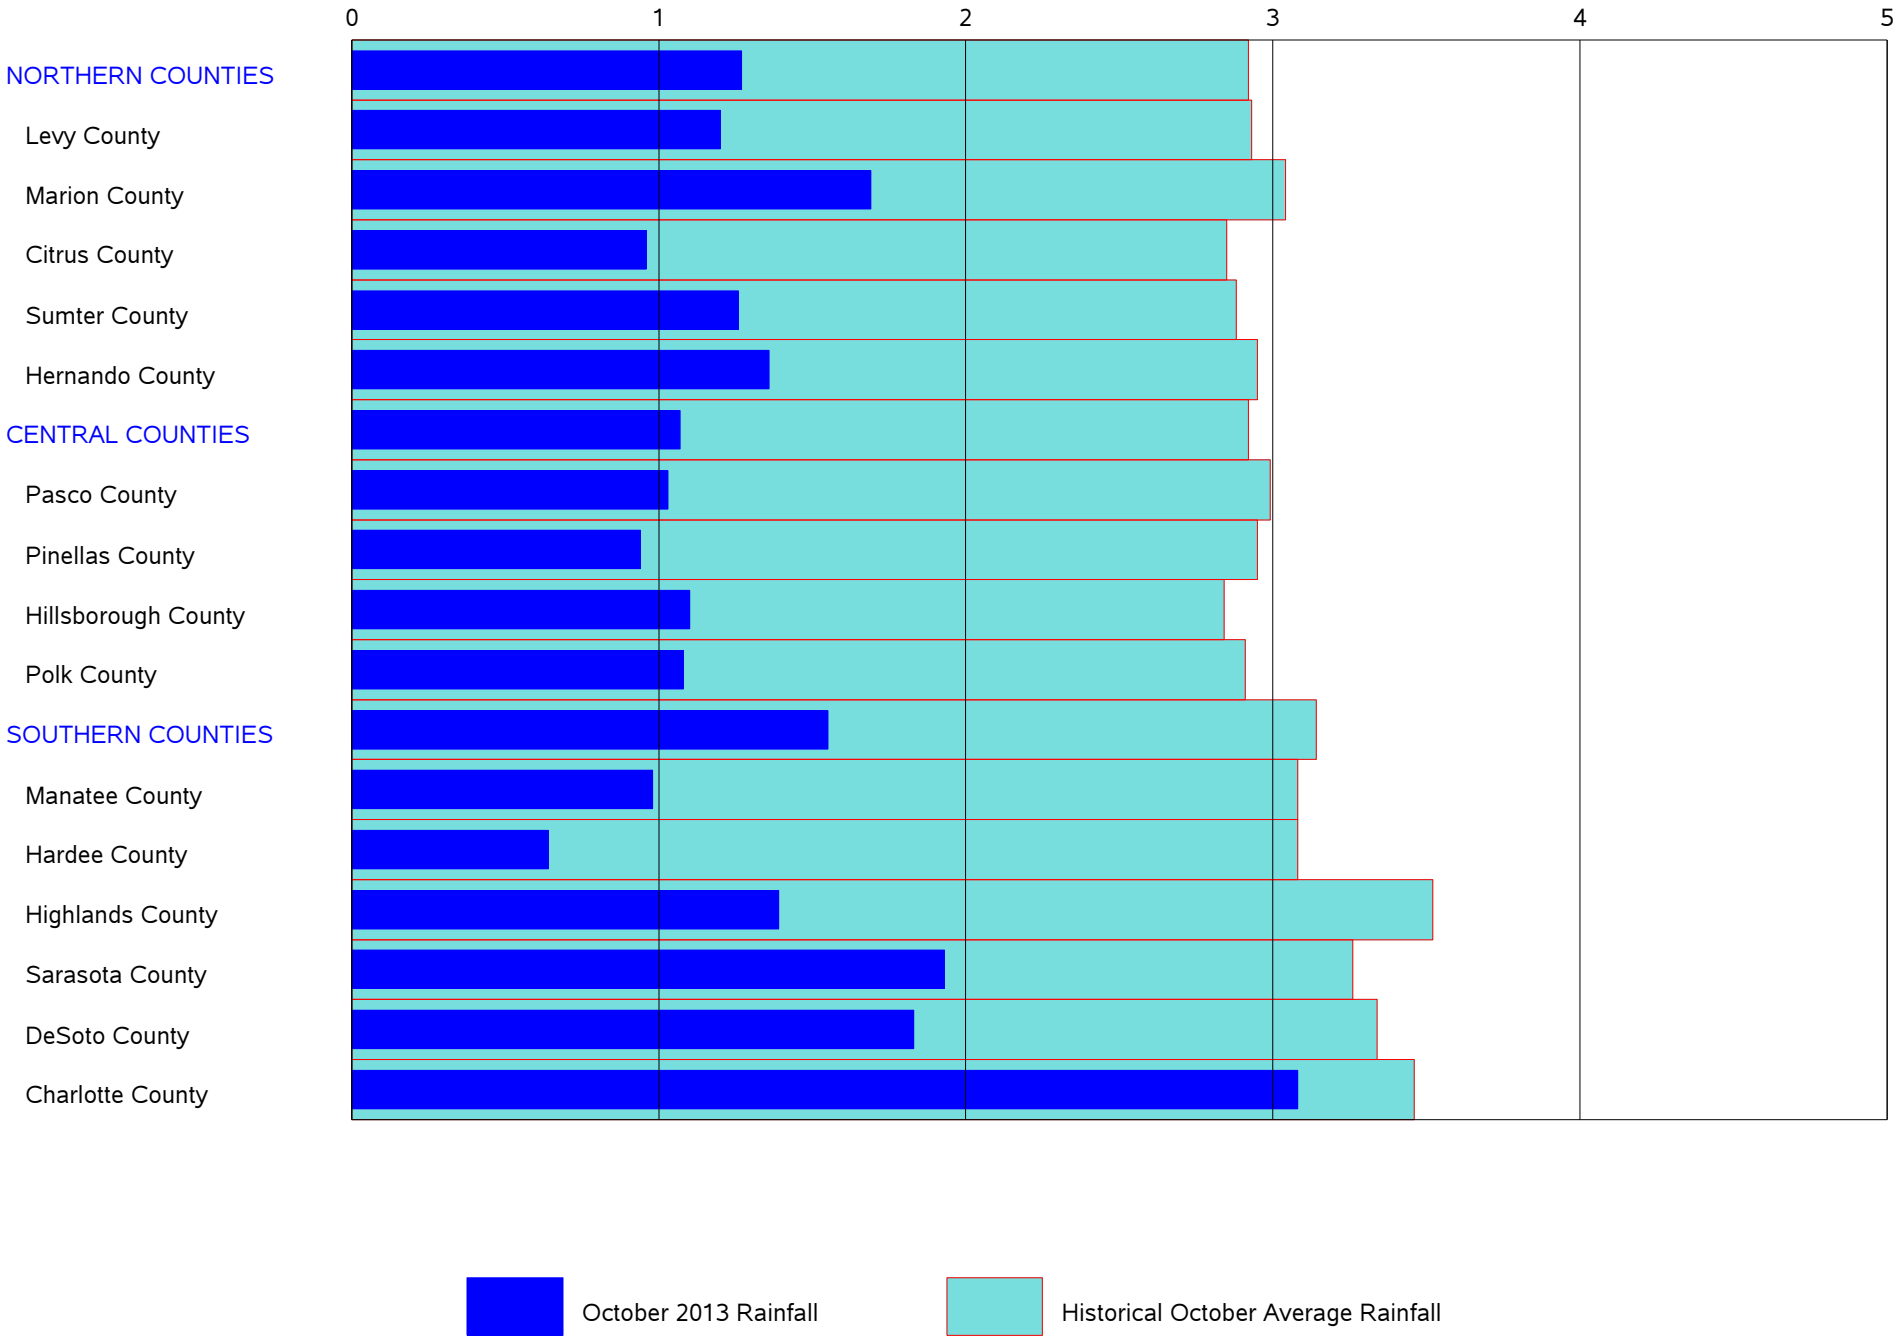

OCTOBER 2013 12-MONTH CUMULATIVE RAINFALL VS AVERAGE ANNUAL CUMULATIVE (INCHES)

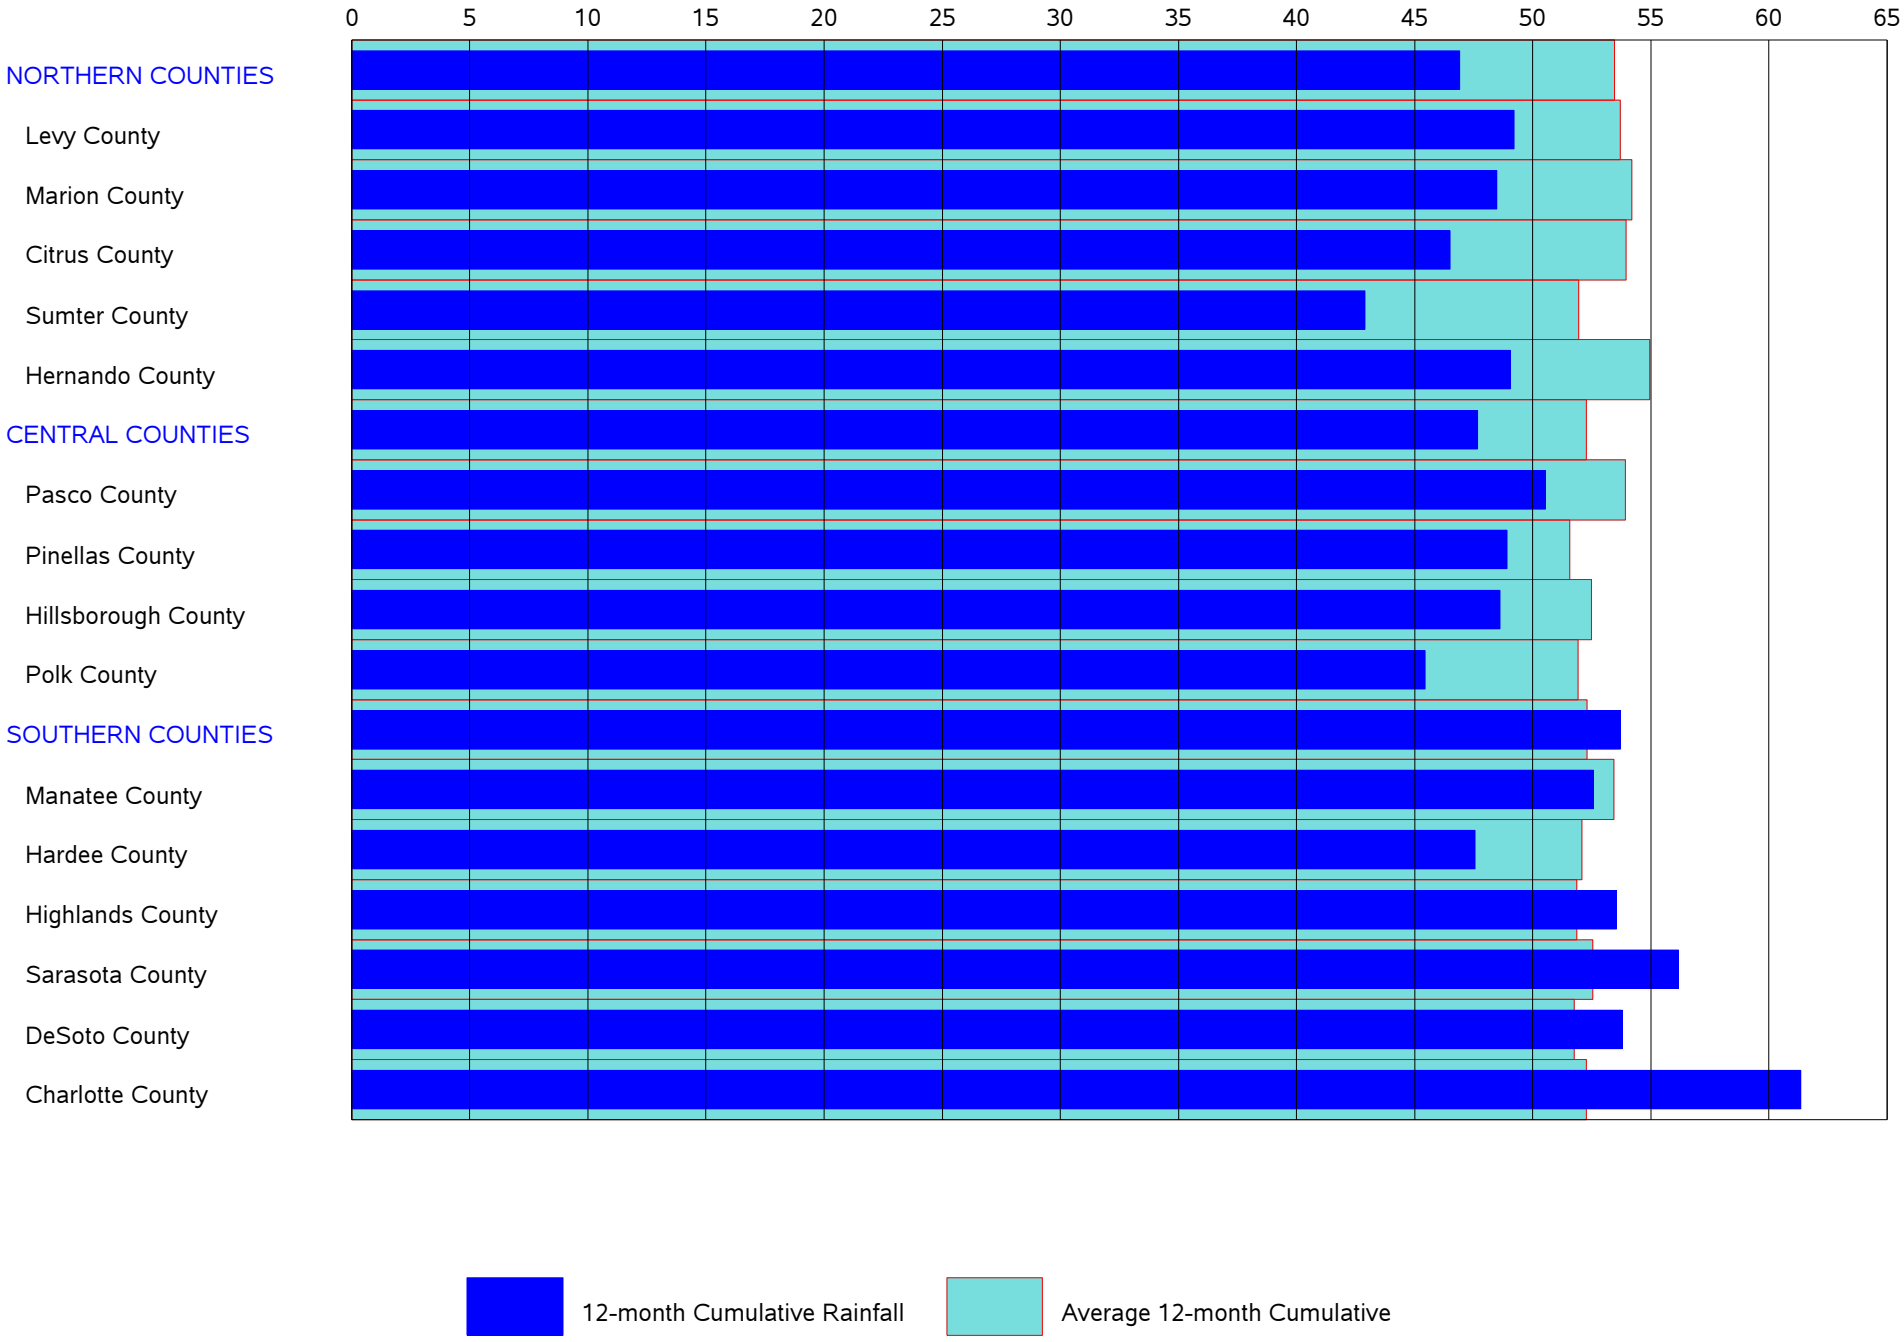

SWFWMD Rainfall Distribution
October 2013

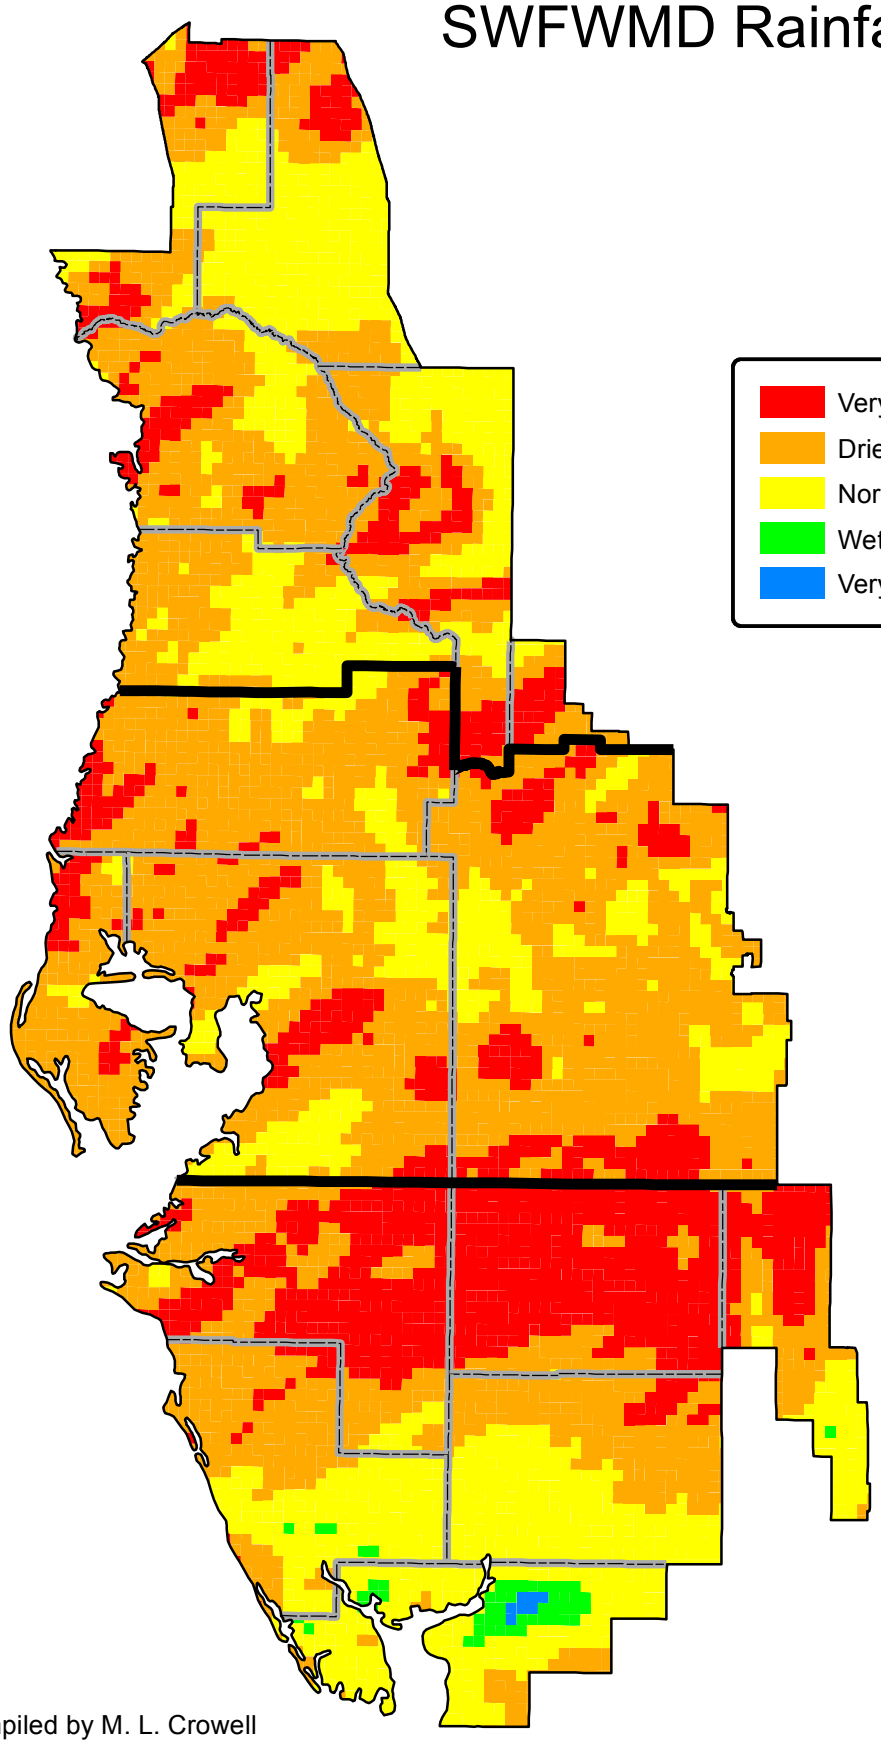

Compiled by M. L. Crowell
Data source: Vieux, Inc.

Southwest Florida
Water Management District

SWFWMD Rainfall Distribution
November 2012 through October 2013

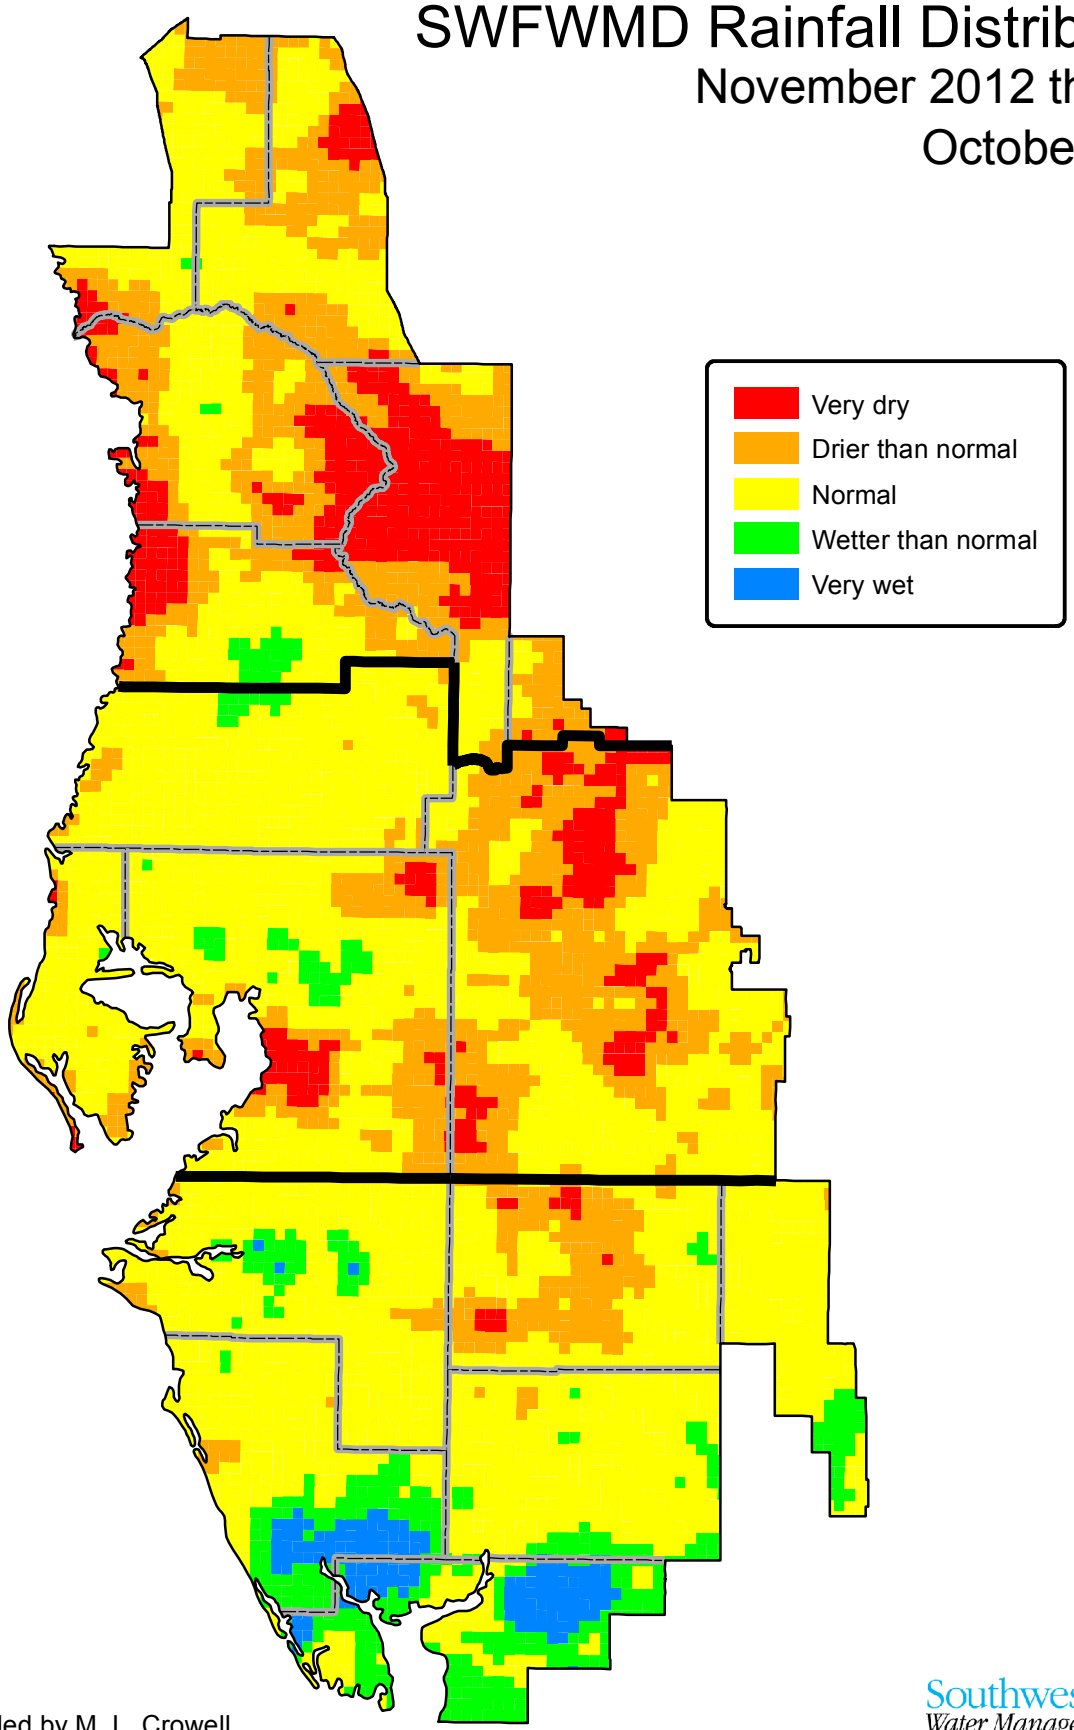

Compiled by M. L. Crowell
Data source: Vieux, Inc.

Southwest Florida Water Management District

SURFACE WATER

Lakes

Across the District, 76 lakes have been selected as excellent indicators of current surface water conditions (see index map in Appendix). Water levels of these lakes are read monthly. In general, these lakes are concentrated in four regions, the northern region of Citrus, Hernando, and Sumter Counties, the Tampa Bay region of Hillsborough and Pasco Counties, the Polk Uplands region of northern Polk County, and the Lake Wales Ridge region of Polk and Highlands Counties. In this report, current monthly lake levels are tabulated and compared with previous records as well as District-established management levels. In addition, lake-level data representative of the four regions are presented in hydrographs showing a 15-year history of water levels, as a general indicator of surface-water conditions in that region.

The District's Governing Board (the Board) has established lake management levels for approximately 410 lakes within District boundaries, which are specified in Chapter 40D-8, Florida Administrative Code (F.A.C.). Management levels help protect the water resources of the District and the ecology of the lake or water-body for which it was established. In this report, the following three management levels are used to indicate normal and low lake levels: the Minimum Flood (MF) level, the Minimum Low Management (MLM) level, and the Minimum Extreme Low Management (MELM) level. In general, the MF level corresponds to the normal high level, the MLM to the normal low level, and the MELM to a drought-year low. These levels were derived from various sources, including technical publications, topographic maps, Water Resource Data Reports of the USGS, and other studies. Field investigations are also used to determine past surface levels from water marks, wetland vegetation, dry land vegetation, and to establish the elevation of septic tanks, docks, sea walls, roads and floor slabs.

During a normal year, each of the indicator lakes should reach both the designated normal high (MF) and the normal low (MLM) levels. In addition, it is generally beneficial for lakes to reach the adopted drought year low (MELM) level every four to six years for a short period of time for the biological health of the lake. In this report, hydrographs of representative lakes compare current and recent water levels against **“normal ranges”** defined by the adopted MF and MLM levels.

Of the 76 lakes presented in this report, 17 have water-control structures. These structures are used for water conservation and do not generally influence the water levels with regard to meteorologically wet or dry conditions. During periods of extreme high water, the structures may be operated to minimize flooding.

In October, 61 of the 76 lakes monitored for this report recorded water level decreases, compared to last month. Water levels increased slightly in the Northern region by 0.02 foot, while they decreased in the Tampa Bay, Polk Uplands and Lake Wales Ridge regions by 0.47, 0.21 and 0.21 foot, respectively. District-wide, average water levels decreased by 0.28 foot, compared to last month.

In October, 46 of the 76 lakes monitored for this report recorded water level increases, 27 reported decreases, levels remained the same in two lakes and data was missing for one lake, compared to October 2012. In the Northern, Tampa Bay, Polk Uplands and Lake Wales Ridge regions, average lake levels were higher by 0.37 foot, 0.16 foot, 0.10 foot and 1.50 feet, respectively, compared to last year's levels. District-wide, average lake levels were higher by 0.33 foot.

Water levels in 54 of the 76 lakes were above the base of the annual normal range. Average lake levels in the Northern, Polk Uplands, and Lake Wales Ridge regions were 0.92 foot, 0.32 foot and 1.01 feet, respectively, below the base of the annual normal range. Average lake levels in the Tampa Bay region were 1.39 feet above the base of the normal range. District-wide, average lake levels were 0.22 foot above the base of the annual normal range. Water levels in 63 of the 76 lakes were above the drought-year levels.

SUMMARY OF LAKE ELEVATIONS OF REGIONAL LAKES (feet)

NORTHERN LAKES

Lake Name	County	Beginning of Record	SEP 2013	OCT 2013	OCT 2012	Change from SEP 2013	Change from OCT 2012	Diff from MELM	(MELM) Drought Year Low	(MLM) Normal Year Low	(MF) Normal Year High	Period of Record Low	Record Low Date	Period of Record High	Record High Date
Big Fish Lake	Pasco	1980	72.52	72.68	70.59	0.16	2.09	0.93	71.75	73.05	76.05	65.45	JUN 1997	77.40	SEP 2004
Crews Lake	Pasco	1981	50.18	50.30	51.55	0.12	-1.25	0.30	50.00	52.00	55.00	42.63	APR 2001	55.40	SEP 1982
Hancock Lake	Pasco	1978	102.78	103.08	101.08	0.30	2.00	1.08	102.00	104.00	106.50	90.00	MAR 2009	108.90	MAR 1998
Hunters Lake	Hernando	1965	18.84	17.26	17.78	-1.58	-0.52	1.26	16.00	17.50	20.50	11.70	JUN 2001	20.50	MAR 1970
Lake Iola	Pasco	1965	136.71	136.95	133.94	0.24	3.01	-5.55	142.50	145.00	147.50	128.96	MAY 2012	148.70	JAN 1989
Lake Lindsey	Hernando	1965	62.76	62.44	62.80	-0.32	-0.36	-2.06	64.50	66.00	69.00	59.27	MAY 2012	70.14	AUG 1965
Little Lake (Consu	Citrus	1985	38.62	39.70	40.74	1.08	-1.04	2.45	37.25	39.00	41.50	31.10	MAY 2001	42.84	SEP 2004
Lake Miona	Sumter	1978	49.66	49.78	50.04	0.12	-0.26	-1.22	51.00	53.00	55.00	47.88	AUG 1992	56.60	OCT 1982
Moon Lake	Pasco	1990	39.80	39.86	39.69	0.06	0.17	4.36	35.50	37.50	40.50	32.98	APR 2009	41.26	SEP 2004
Lake Panasoffkee	Sumter	1955	39.80	39.61	38.99	-0.19	0.62	1.11	38.50	39.50	42.50	36.92	JUN 2007	44.28	APR 1960
Lake Pasadena	Pasco	1984	88.15	88.41	87.28	0.26	1.13	-1.59	90.00	91.50	94.50	81.56	MAY 2001	94.86	OCT 2004
Spring Lake	Hernando	1965	181.46	181.34	180.76	-0.12	0.58	3.09	178.25	181.25	184.25	174.75	APR 2009	183.57	OCT 1984
Floral City Pool	Citrus	1957	40.74	40.67	41.39	-0.07	-0.72	2.42	38.25	40.25	42.50	30.35	JUN 2001	44.22	MAR 1960
Inverness Pool	Citrus	1958	39.97	39.98	39.88	0.01	0.10	3.73	36.25	38.25	40.50	31.46	MAY 2001	42.94	APR 1960
Hernando Pool	Citrus	1958	38.44	38.71	38.71	0.27	0.00	3.96	34.75	36.75	39.00	31.09	JUL 2001	41.74	APR 1960

TAMPA BAY LAKES

Lake Name	County	Beginning of Record	SEP 2013	OCT 2013	OCT 2012	Change from SEP 2013	Change from OCT 2012	Diff from MELM	(MELM) Drought Year Low	(MLM) Normal Year Low	(MF) Normal Year High	Period of Record Low	Record Low Date	Period of Record High	Record High Date
Lake Alice	Hillsborough	1971	41.48	41.08	41.01	-0.40	0.07	3.58	37.50	40.25	42.25	33.24	MAY 2002	42.42	SEP 2004
Lake Ann-Parker	Pasco	1969	48.06	47.49	47.29	-0.57	0.20	2.49	45.00	45.75	48.75	43.28	JUN 2002	49.29	SEP 1979
Bay Lake	Hillsborough	1982	45.79	45.53	45.36	-0.26	0.17	3.03	42.50	44.00	46.75	41.86	APR 1985	46.46	DEC 1997
Lake Brant	Hillsborough	1971	58.15	57.90	57.78	-0.25	0.12	3.40	54.50	56.50	58.75	51.65	JUN 1994	60.04	AUG 1979
Brooker Lake	Hillsborough	1977	63.60	62.70	62.65	-0.90	0.05	3.70	59.00	61.00	64.25	56.49	MAY 2002	64.08	DEC 1997
Calm Lake	Hillsborough	1965	50.43	50.13	49.99	-0.30	0.14	5.13	45.00	47.50	50.50	41.88	JUN 2002	50.73	SEP 2004
Camp Lake	Pasco	1968	63.78	63.10	63.13	-0.68	-0.03	4.10	59.00	61.75	64.00	50.82	MAY 2002	64.00	SEP 1979
Carlton Lake	Hillsborough	1976	92.50	92.69	92.21	0.19	0.48	4.69	88.00	90.50	93.50	86.82	MAY 2001	94.60	FEB 1998
Lake Carroll	Hillsborough	1985	36.95	36.46	36.60	-0.49	-0.14	3.96	32.50	34.50	37.00	30.87	MAY 2002	38.06	DEC 1997
Church Lake	Hillsborough	1931	36.08	35.58	35.56	-0.50	0.02	4.08	31.50	34.00	36.25	27.94	MAY 2002	38.60	FEB 1936
Lake Cooper	Hillsborough	1946	60.88	60.16	60.44	-0.72	-0.28	3.16	57.00	59.75	61.75	55.60	JUN 2001	62.54	SEP 1947
Crescent Lake	Hillsborough	1981	42.12	42.18	42.00	0.06	0.18	3.68	38.50	40.00	42.50	35.34	JUN 2001	42.48	SEP 2009
Deer Lake	Hillsborough	1977	66.90	66.34	66.38	-0.56	-0.04	3.84	62.50	64.50	67.25	60.72	MAY 2002	67.42	DEC 1997
Egypt Lake	Hillsborough	1978	37.18	36.38	36.40	-0.80	-0.02	3.88	32.50	35.00	37.50	33.06	MAY 2000	38.15	SEP 1985
Gornto Lake	Hillsborough	1979	38.48	37.93	36.10	-0.55	1.83	3.93	34.00	36.00	38.50	29.86	MAR 1979	39.48	FEB 1998
Lake Harvey	Hillsborough	1970	62.36	60.94	60.94	-1.42	0.00	2.94	58.00	60.25	62.50	53.94	MAY 2002	63.90	DEC 1997
Lake Hiawatha	Hillsborough	1981	50.16	49.91	49.82	-0.25	0.09	4.91	45.00	48.00	50.50	46.14	JUN 2000	51.12	APR 2010
Horse Lake	Hillsborough	1930	47.49	47.16	47.01	-0.33	0.15	5.16	42.00	44.00	46.50	36.33	JUN 2002	50.00	AUG 1959
Lake Keene	Hillsborough	1948	62.65	62.61	62.36	-0.04	0.25	3.61	59.00	60.50	63.00	56.92	MAY 1994	63.30	SEP 1953
Keystone Lake	Hillsborough	1984	41.79	41.69	41.79	-0.10	-0.10	2.69	39.00	39.75	42.00	37.89	JUN 1994	43.26	SEP 1988
King Lake	Pasco	1977	103.38	103.05	102.54	-0.33	0.51	3.05	100.00	102.50	105.25	94.20	APR 2009	104.92	SEP 1983
Lake Leclare	Hillsborough	1977	51.23	50.91	51.18	-0.32	-0.27	3.91	47.00	49.50	52.00	44.95	JUN 2001	52.59	JUL 2012
Lake Linda	Pasco	1969	66.46	65.70	65.76	-0.76	-0.06	3.70	62.00	64.00	66.75	60.07	MAY 2001	67.13	AUG 1979
Little Lake	Hillsborough	1931	45.60	45.30	45.40	-0.30	-0.10	3.30	42.00	43.50	46.50	38.06	JUN 1994	48.65	AUG 1960
Long Pond	Hillsborough	1978	45.83	45.69	45.79	-0.14	-0.10	3.69	42.00	44.00	46.50	36.33	MAY 1979	48.27	SEP 1998
Mud (Walden) Lake	Hillsborough	1978	113.18	112.84	112.82	-0.34	0.02	2.34	110.50	112.50	115.00	111.68	MAY 2012	114.42	MAR 1978
Lake Padgett	Pasco	1965	70.37	69.49	69.64	-0.88	-0.15	1.99	67.50	69.00	71.25	66.27	JUN 2001	71.90	SEP 1988
Platt Lake	Hillsborough	1946	50.30	49.48	49.30	-0.82	0.18	3.48	46.00	47.75	50.50	42.53	JUN 2001	51.88	SEP 1979
Rainbow Lake	Hillsborough	1971	40.14	39.73	39.54	-0.41	0.19	4.73	35.00	37.50	40.50	29.82	JUN 2002	40.74	AUG 2003
Lake Stemper	Hillsborough	1946	61.10	60.98	60.85	-0.12	0.13	2.98	58.00	59.50	62.00	53.36	JUN 2001	62.30	MAR 1960
Lake Thomas	Hillsborough	1971	63.17	62.78	62.77	-0.39	0.01	3.53	59.25	61.25	63.50	56.48	JUN 2002	64.48	SEP 1979
Turkey Ford Lake	Hillsborough	1970	53.40	50.98	50.85	-2.42	0.13	0.98	50.00	51.50	54.00	48.07	JUN 1985	55.28	SEP 1988
Lake Wimauma	Hillsborough	1985	79.56	80.14	78.49	0.58	1.65	-0.86	81.00	83.00	86.75	70.12	MAY 2001	84.38	MAR 1998

NOTE: M='no data' or 'not determined'

Compiled by Patrick Casey

SUMMARY OF LAKE ELEVATIONS OF REGIONAL LAKES (feet)

POLK UPLANDS LAKES

Lake Name	County	Beginning of Record	SEP 2013	OCT 2013	OCT 2012	Change from SEP 2013	Change from OCT 2012	Diff from MELM	(MELM) Drought Year Low	(MLM) Normal Year Low	(MF) Normal Year High	Period of Record Low	Record Low Date	Period of Record High	Record High Date
Lake Alfred	Polk	1961	125.85	125.70	125.50	-0.15	0.20	-0.55	126.25	128.25	130.75	122.40	MAY 1977	132.76	MAR 1998
Lake Ariana	Polk	1945	135.73	135.47	135.14	-0.26	0.33	2.97	132.50	134.50	137.00	131.28	MAY 1976	137.90	AUG 1946
Lake Arietta	Polk	1970	139.96	139.67	140.25	-0.29	-0.58	1.67	138.00	141.00	144.00	136.50	MAY 1977	144.12	SEP 2004
Blue Lake South	Polk	1986	111.71	111.52	111.34	-0.19	0.18	-0.98	112.50	114.00	117.00	103.38	FEB 1991	119.19	DEC 2005
Lake Bonny	Polk	1954	130.28	129.95	130.16	-0.33	-0.21	3.95	126.00	128.00	130.50	122.34	MAY 2009	133.08	SEP 2004
Lake Buffum	Polk	1972	129.58	129.32	127.98	-0.26	1.34	2.57	126.75	129.25	132.25	123.90	JUN 1991	133.00	JUN 2005
Clearwater Lake	Polk	1979	142.16	142.42	143.09	0.26	-0.67	3.42	139.00	141.00	143.50	137.93	MAY 2001	146.06	AUG 1984
Lake Conine	Polk	1989	127.95	127.90	126.45	-0.05	1.45	3.40	124.50	126.50	128.75	123.83	NOV 2009	129.95	SEP 2004
Eagle Lake	Polk	1965	125.82	125.58	125.20	-0.24	0.38	-0.92	126.50	128.50	130.75	118.76	MAY 1976	131.50	SEP 1996
Lake Fannie	Polk	1967	123.10	122.94	121.92	-0.16	1.02	2.94	120.00	123.50	125.75	118.67	MAY 1977	127.51	SEP 2004
Lake Garfield	Polk	1969	103.36	102.90	103.50	-0.46	-0.60	2.90	100.00	101.00	104.75	97.38	JUN 2001	105.91	SEP 1979
Lake Hamilton	Polk	1945	120.94	120.59	119.46	-0.35	1.13	3.34	117.25	119.00	121.50	116.61	JUN 2001	124.34	OCT 1948
Lake Helene	Polk	1961	137.74	137.66	139.32	-0.08	-1.66	-1.34	139.00	141.00	144.00	134.06	JUN 2008	146.48	MAR 1998
Lake Howard	Polk	1987	130.50	130.28	130.00	-0.22	0.28	3.28	127.00	129.50	132.00	127.69	MAY 2001	133.08	SEP 2004
Lake Juliana	Polk	1961	129.80	129.75	130.42	-0.05	-0.67	2.25	127.50	130.00	132.50	126.20	MAY 1976	134.10	MAR 1998
Lake Mcleod	Polk	1965	124.50	124.20	124.40	-0.30	-0.20	-3.80	128.00	129.50	132.00	115.11	MAY 1976	131.98	SEP 1998
Lake Otis	Polk	1954	125.50	125.25	125.00	-0.25	0.25	2.25	123.00	125.00	128.00	119.58	MAY 1976	129.12	SEP 1960
Lake Ruby	Polk	1971	124.65	124.24	124.50	-0.41	-0.26	3.24	121.00	123.00	125.25	117.41	MAY 1976	125.98	SEP 2004
Lake Gibson	Polk	1969	142.99	142.79	142.81	-0.20	-0.02	1.29	141.50	141.50	143.50	140.21	MAY 2009	145.40	SEP 1988

LK WALES RIDGE LAKES

Lake Name	County	Beginning of Record	SEP 2013	OCT 2013	OCT 2012	Change from SEP 2013	Change from OCT 2012	Diff from MELM	(MELM) Drought Year Low	(MLM) Normal Year Low	(MF) Normal Year High	Period of Record Low	Record Low Date	Period of Record High	Record High Date
Lake Annie	Polk	1970	111.43	111.24	110.98	-0.19	0.26	-2.76	114.00	116.00	119.00	108.36	JUN 1990	117.56	OCT 2005
Lake Clay	Highlands	1983	78.43	78.10	78.17	-0.33	-0.07	3.10	75.00	76.00	78.75	74.34	MAY 2001	78.82	JUN 2013
Crooked Lake	Polk	1945	117.07	116.66	115.88	-0.41	0.78	-0.34	117.00	118.50	122.00	106.10	MAY 1991	123.98	OCT 1948
Lake Jackson	Highlands	1945	102.53	102.37	99.72	-0.16	2.65	4.37	98.00	100.00	103.00	96.37	JUN 2008	103.76	SEP 1947
Lake Letta	Highlands	1951	97.63	97.55	95.56	-0.08	1.99	2.55	95.00	97.00	100.00	90.27	JUN 2008	101.38	OCT 1953
Lake Lotela	Highlands	1950	105.48	105.64	103.27	0.16	2.37	1.64	104.00	105.00	108.50	97.00	JUN 2008	109.38	JUL 1954
Lake Placid	Highlands	1984	93.90	93.57	91.11	-0.33	2.46	3.57	90.00	91.50	94.50	88.08	JUN 2008	94.24	SEP 2003
Starr Lake	Polk	1983	102.58	102.20	M	-0.38	M	-5.80	108.00	110.00	113.00	96.23	JUL 2001	109.80	DEC 2005
Trout Lake	Highlands	1981	95.76	95.60	94.05	-0.16	1.55	0.60	95.00	98.00	101.00	87.15	MAY 2001	98.90	MAR 1998

NOTE: M='no data' or 'not determined'

Compiled by Patrick Casey

HYDROGRAPHS OF REGIONAL LAKES

15-yr Period of Record

Hunters Lake
Northern Lakes

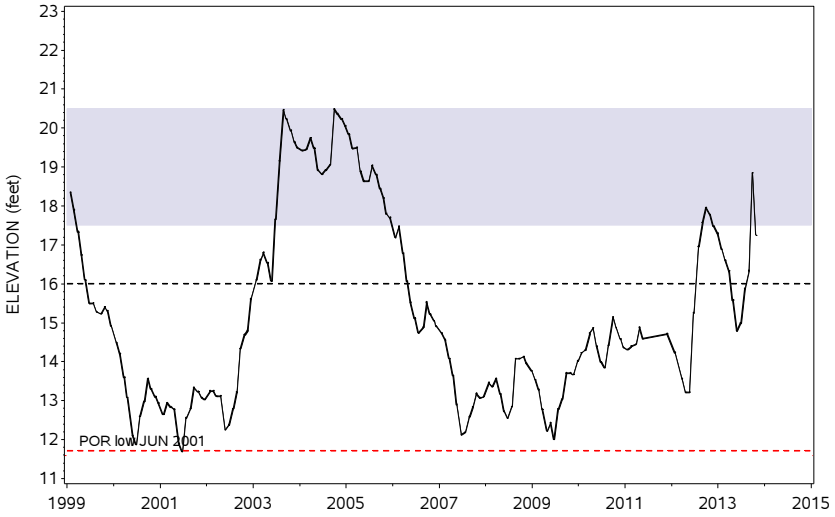

Lake Panasoffkee
Northern Lakes

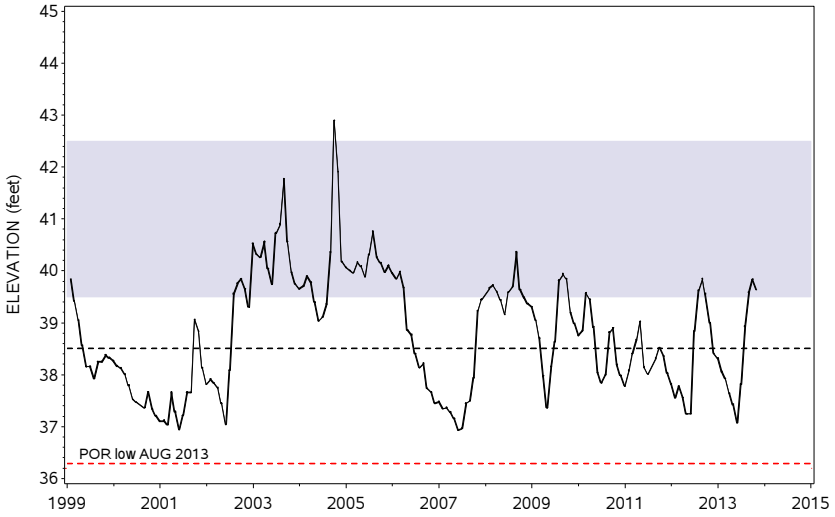

Camp Lake
Tampa Bay Lakes

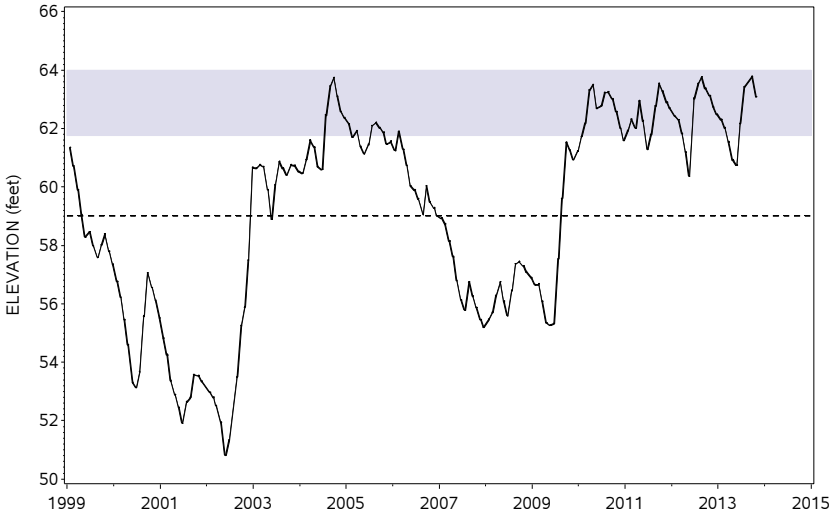

Church Lake
Tampa Bay Lakes

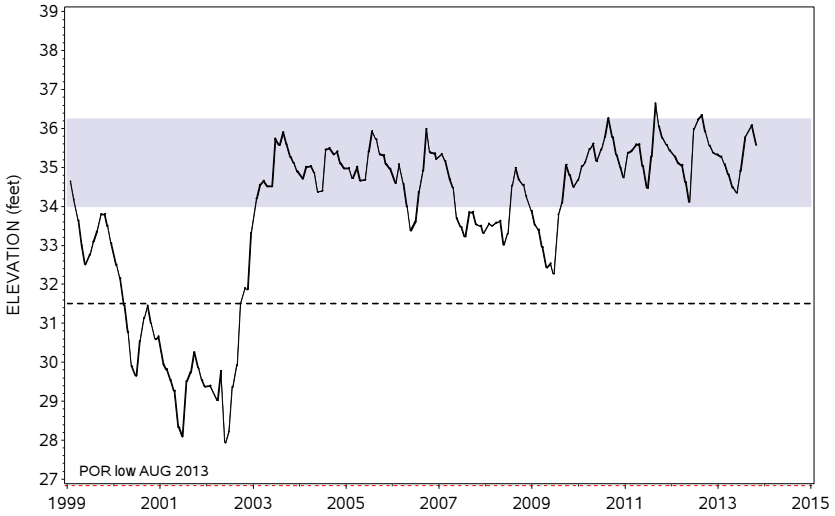

POR low AUG 2013

Monthly Mean Elevation **Drought Year Low** **Normal Range**

Compiled by Patrick Casey

HYDROGRAPHS OF REGIONAL LAKES

15-yr Period of Record

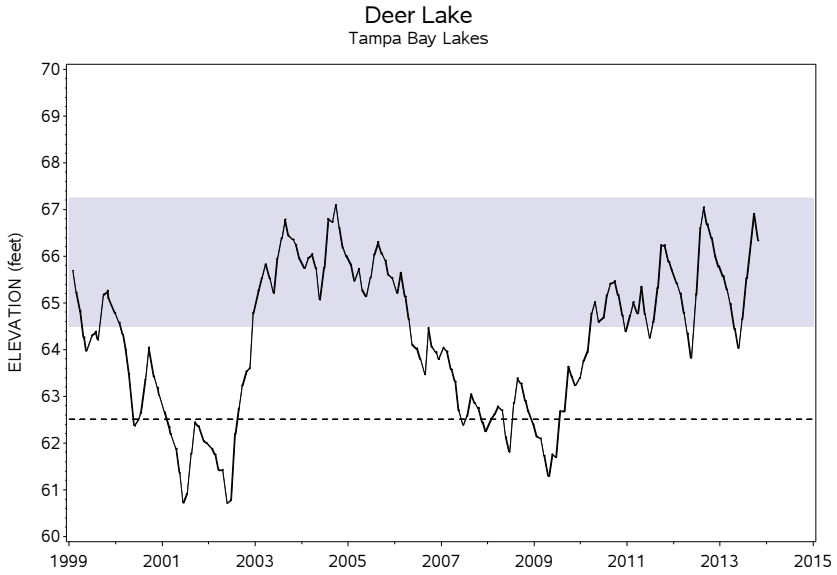

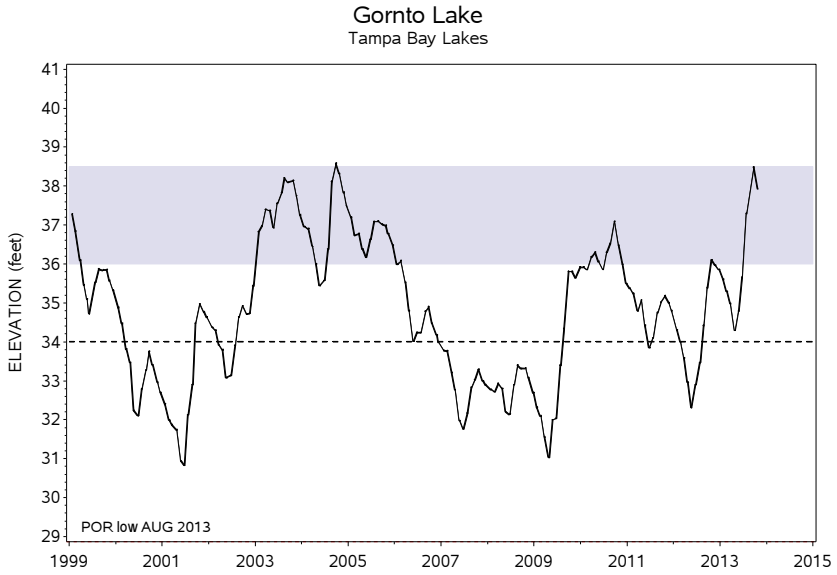

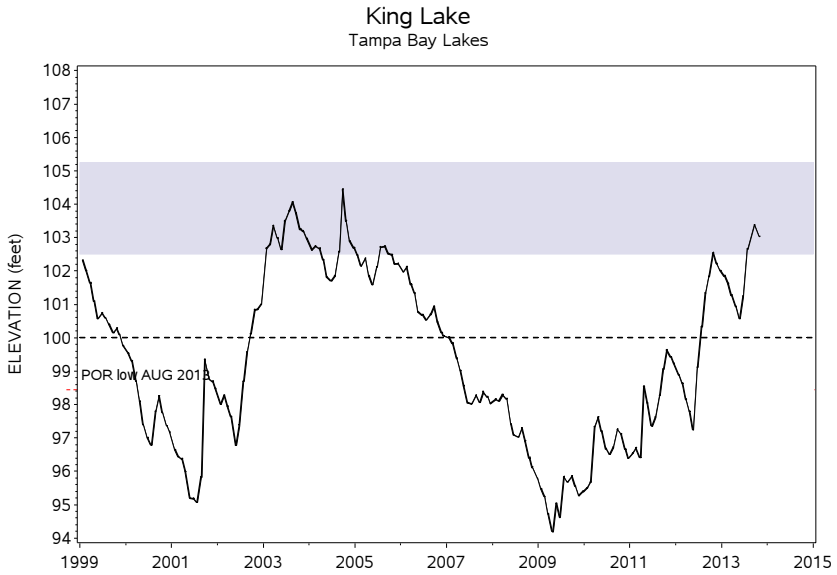

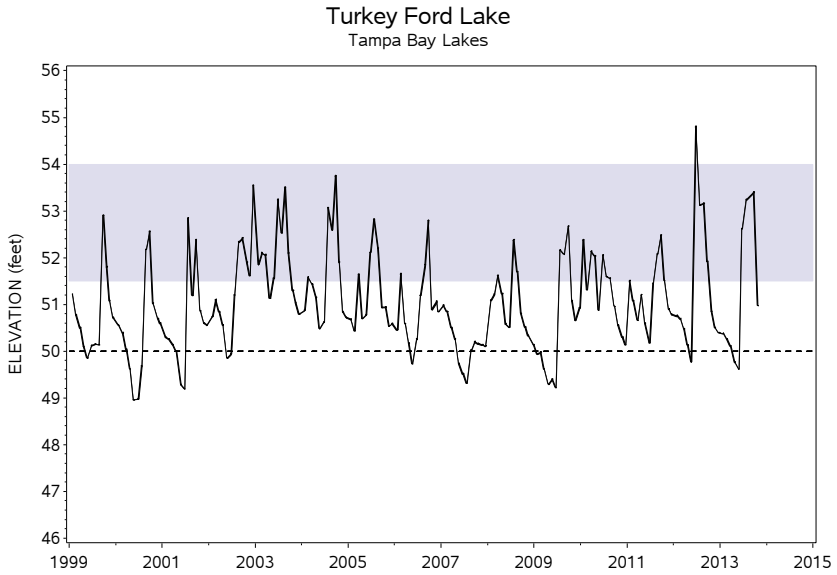

Monthly Mean Elevation **Drought Year Low** **Normal Range**

Compiled by Patrick Casey

HYDROGRAPHS OF REGIONAL LAKES

15-yr Period of Record

Lake Wimauma
Tampa Bay Lakes

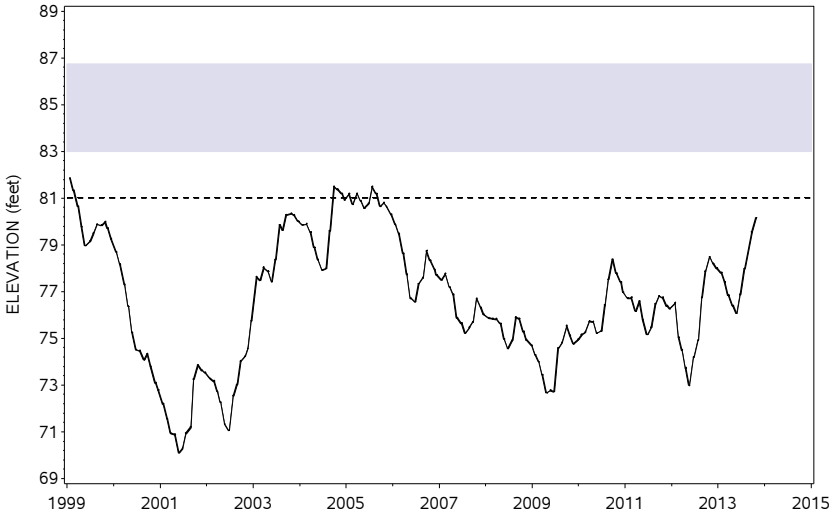

Lake Arietta
Polk Uplands Lakes

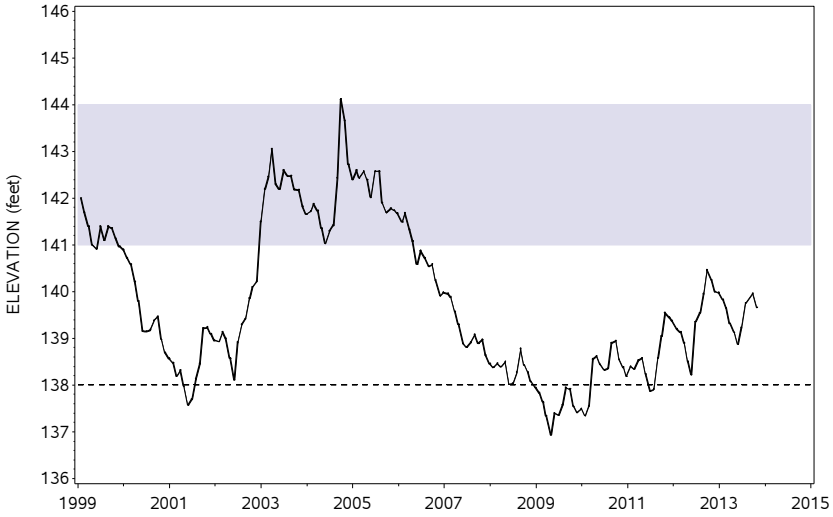

Lake Buffum
Polk Uplands Lakes

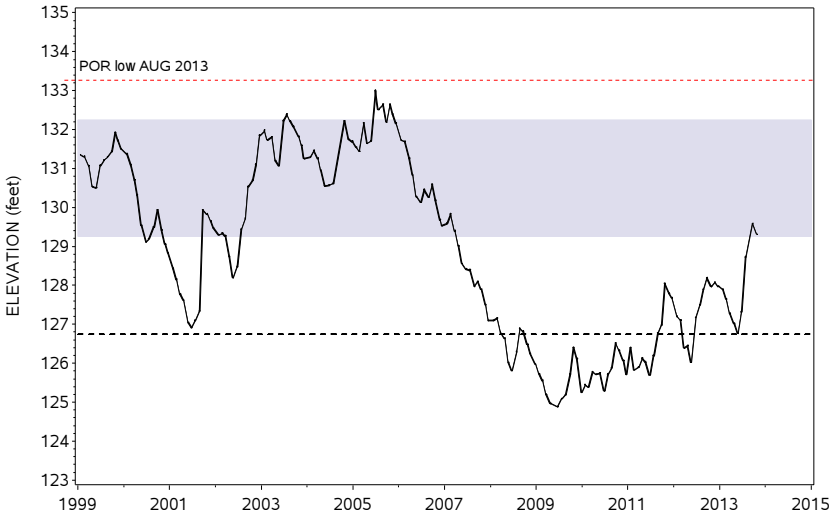

Lake Hamilton
Polk Uplands Lakes

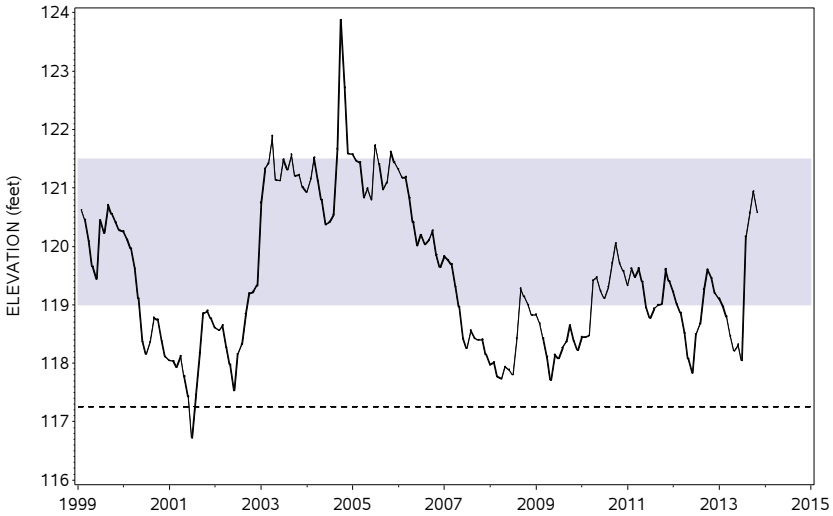

Monthly Mean Elevation **Drought Year Low** **Normal Range**

Compiled by Patrick Casey

HYDROGRAPHS OF REGIONAL LAKES

15-yr Period of Record

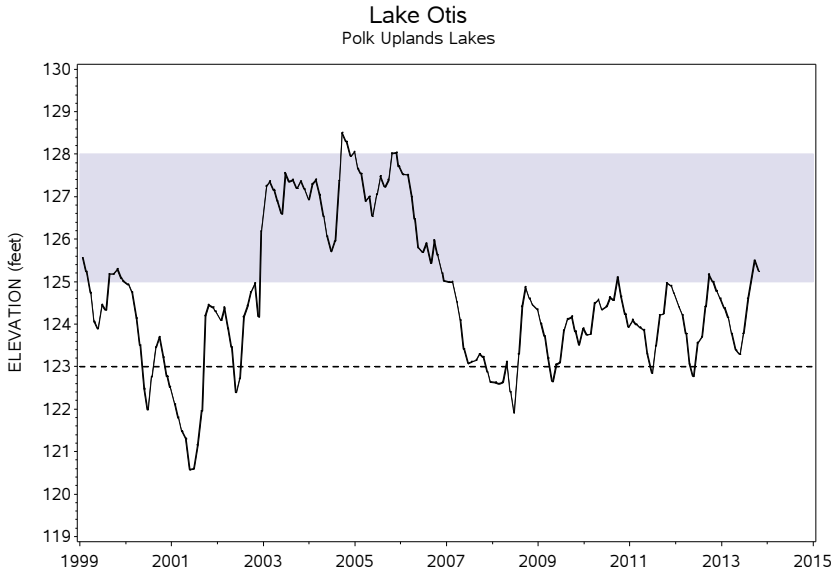

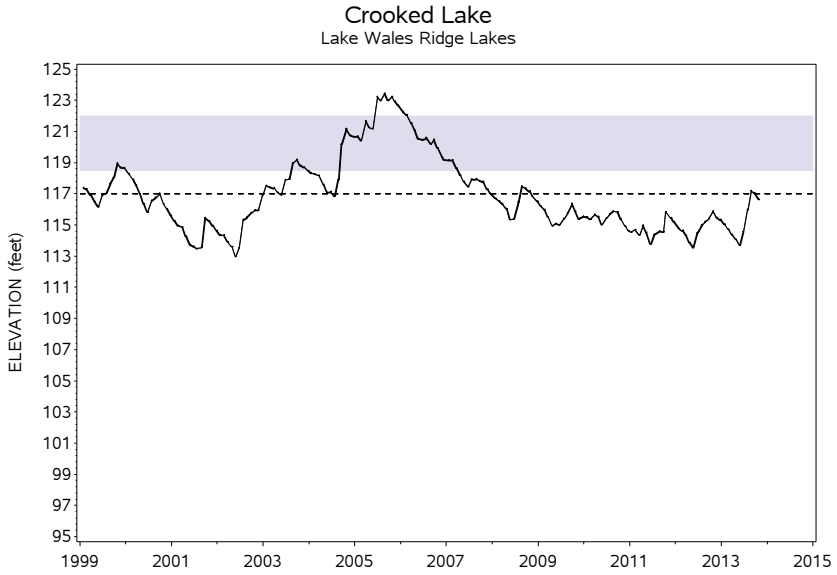

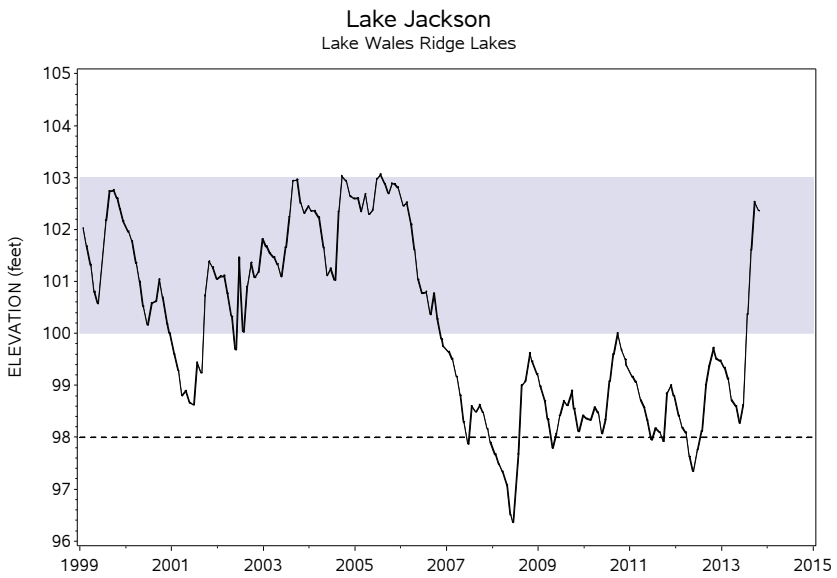

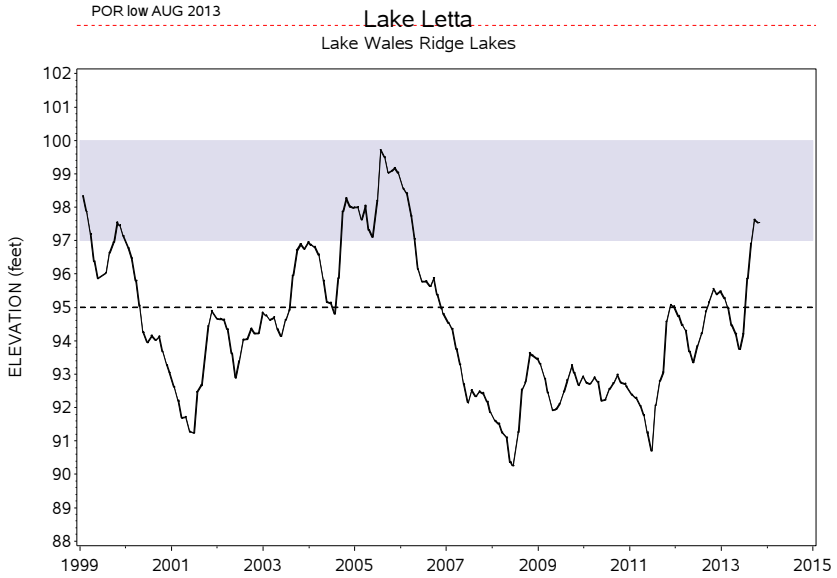

Monthly Mean Elevation Drought Year Low Normal Range

Compiled by Patrick Casey

Streams

The District processes streamflow data collected by the U.S. Geological Survey (USGS) under a cooperatively funded program between the District and the USGS. Streamflow is recorded daily as water elevations at 12 gauging stations in three regions of the District (see index map in the Appendix). The USGS uses rating curves developed from water level elevations to calculate streamflow discharge in units of cubic feet per second (cfs). For this report, the reported streamflow values are the means of the daily discharge volumes for the current month. The period-of-record high and low values correspond to monthly means and not to peak events. Percentile values are calculated from the monthly means for the period of record, for each station. The percentile is the monthly mean statistically ranked on a scale of zero to 100 that indicates the percent of the period-of-record monthly means that are at or above the present monthly mean. The current year's data are provisional, and are subject to revision. Revised data are used for all calculations, as they become available.

Hydrographs are produced for each of the stream stations. Current monthly means for each station are compared to respective 25th and 75th percentiles of the period-of-record monthly means.

In October, ten of the 12 stations monitored for this report had decreased streamflow, compared to last month. Total streamflow increased in the northern region of the District by 160.7 cfs (103.8 mgd), while it decreased in the central and southern regions by 1051.1 cfs (679.0 mgd) and 2373.0 cfs (1533.0 mgd), respectively. District-wide, total streamflow decreased an average of 3188.8 cfs (2060.0 mgd).

Eleven of the twelve monitoring stations recorded lower streamflow in October 2013 than in October 2012. Streamflow was lower in the northern, central and southern regions by 603.3 cfs (389.7 mgd), 798.7 cfs (516.0 mgd) and 1230.1 cfs (794.6 mgd), respectively. District-wide, total streamflow was lower, on average, by 2722.8 cfs (1758.9 mgd), than the October 2012 average.

Compared to historical October discharge values, Withlacoochee River streamflow, measured at the Trilby station and the Holder station averaged in the 69th and 40th percentiles, respectively. Streamflow measured at the stations on the Anclote, Pithlachascotee and Hillsborough Rivers averaged in the 72nd, 74th and 63rd percentiles of respective historical October readings. Streamflow measured at the Alafia River, Little Manatee River and Peace River at Bartow stations averaged in the 48th, 49th and 20th percentiles of respective historical October readings. Additionally, streamflow measured at the Josephine Creek, Manatee River, Myakka River and Peace River at Arcadia stations averaged in the 54th, 60th, 61st and 47th percentiles of respective historical October readings.

SUMMARY OF STREAM DISCHARGE FROM MAJOR STREAMS (CFS), OCTOBER 2013

NORTHERN COUNTIES	*Beginning Year of Record*	*Mean Discharge OCT 2013*	*Mean Discharge SEP 2013*	*Mean Discharge OCT 2012*	*Change from SEP 2013*	*Change from OCT 2012*	*OCT 2013 Percentile Rank*	*Period of Record Low*	*Record Low Date*	*Period of Record High*	*Record High Date*
Withlacoochee R at Trilby	1930	563.5	488.9	654.2	74.6	-90.7	69%	0.1	JUN2000	8840	JUN1934
Withlacoochee R near Holder	1931	840.9	680.2	1444.2	160.7	-603.3	40%	33.0	MAR2001	8660	APR1960
CENTRAL COUNTIES											
Anclote River near Elfers	1946	86.1	229.7	116.4	-143.6	-30.3	72%	0.8	MAY1962	3710	JUL1960
Pithlachascottee R near New Port Richey	1963	28.0	50.1	30.4	-22.1	-2.4	74%	0.0	MAY2013	2180	JUN2012
Hillsborough R near Zephyrhills	1939	203.4	368.1	369.7	-164.7	-166.3	63%	27.0	MAY2001	12300	MAR1960
Alafia River at Lithia	1932	236.2	536.8	539.6	-300.6	-303.4	48%	4.1	JUN2000	40800	SEP1933
Little Manatee R near Wimauma	1939	103.4	404.2	242.4	-300.8	-139.0	49%	0.9	DEC1976	11100	SEP1960
Peace River at Bartow	1939	59.5	178.8	216.8	-119.3	-157.3	20%	0.0	MAY2009	4100	SEP1947
SOUTHERN COUNTIES											
Josephine Cr near DeSoto City	1946	72.2	290.4	210.7	-218.2	-138.5	54%	0.5	MAY1956	1680	SEP1948
Manatee River near Myakka Head	1966	42.6	303.5	86.3	-260.9	-43.7	60%	0.1	MAY1975	6440	JUN2003
Myakka River near Sarasota	1936	375.0	778.9	299.5	-403.9	75.5	61%	0.0	JUN2012	10800	JUN2003
Peace River at Arcadia	1931	821.0	2311.0	1944.4	-1490.0	-1123.4	47%	5.6	MAY2000	34700	SEP1933

HYDROGRAPHS OF MAJOR STREAMS
JANUARY 2009 TO OCTOBER 2013

Withlacoochee R at Trilby
Northern Counties

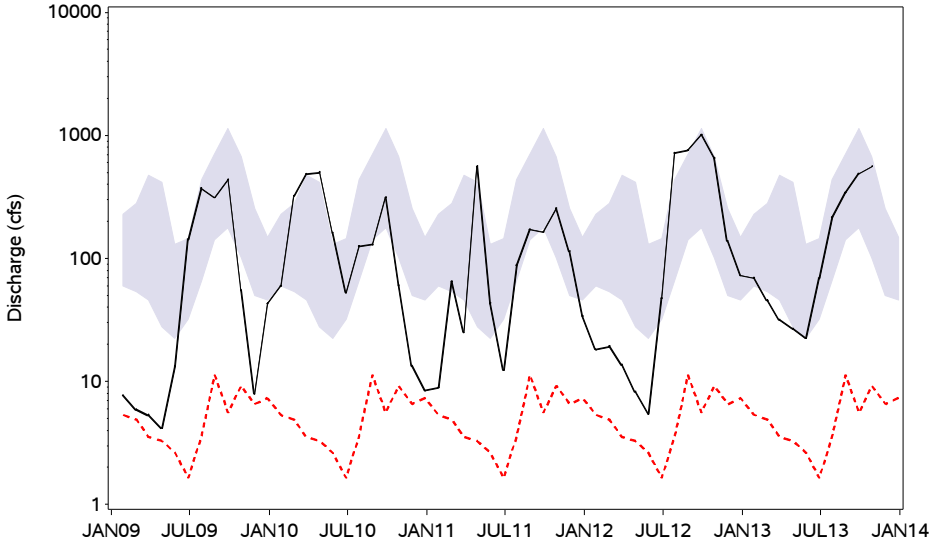

Withlacoochee R near Holder
Northern Counties

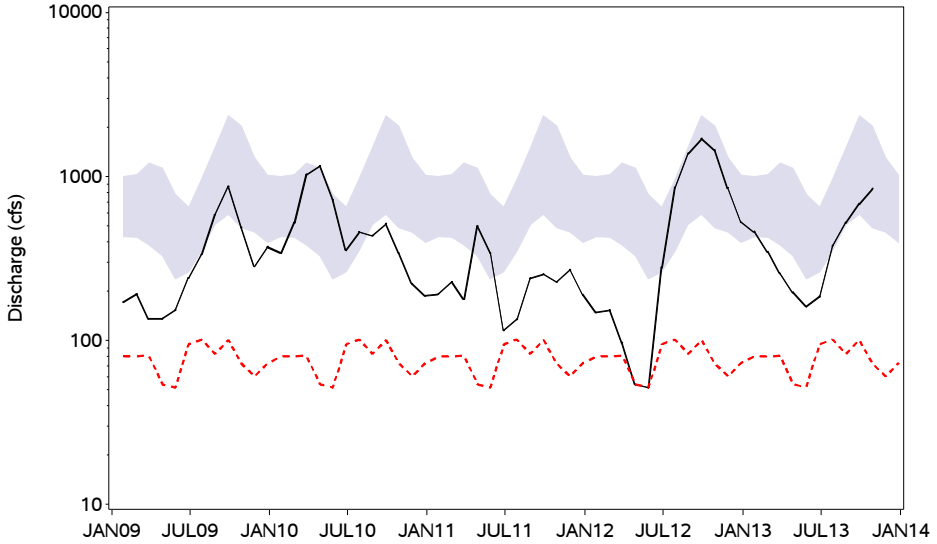

Anclote River near Elfers
Central Counties

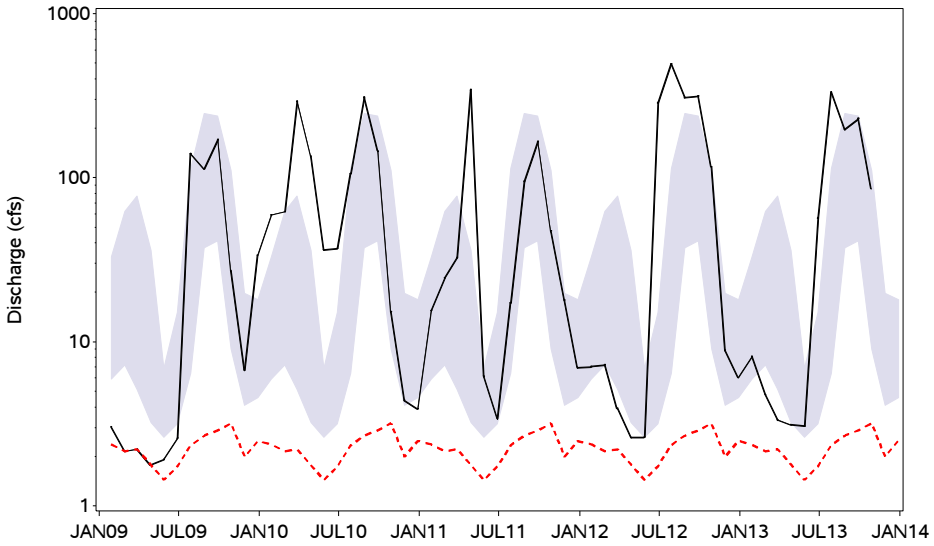

Pithlachascottee R near New Port Richey
Central Counties

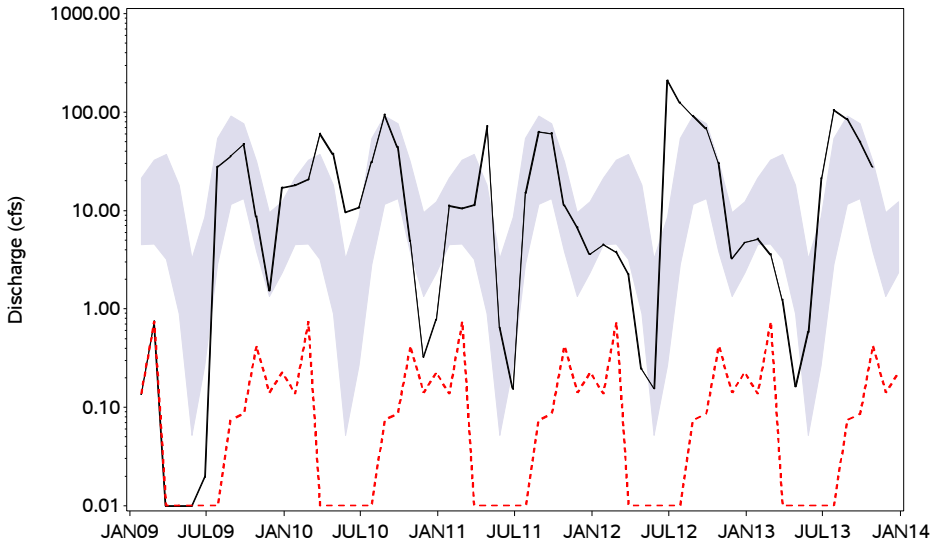

Monthly Mean Discharge POR Monthly Low Normal Range

HYDROGRAPHS OF MAJOR STREAMS
JANUARY 2009 TO OCTOBER 2013

Hillsborough R near Zephyrhills
Central Counties

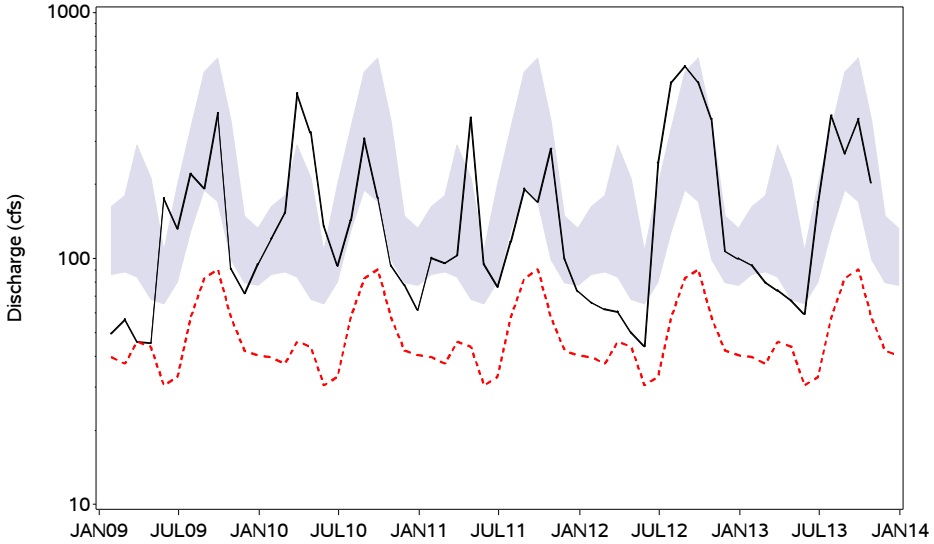

Alafia River at Lithia
Central Counties

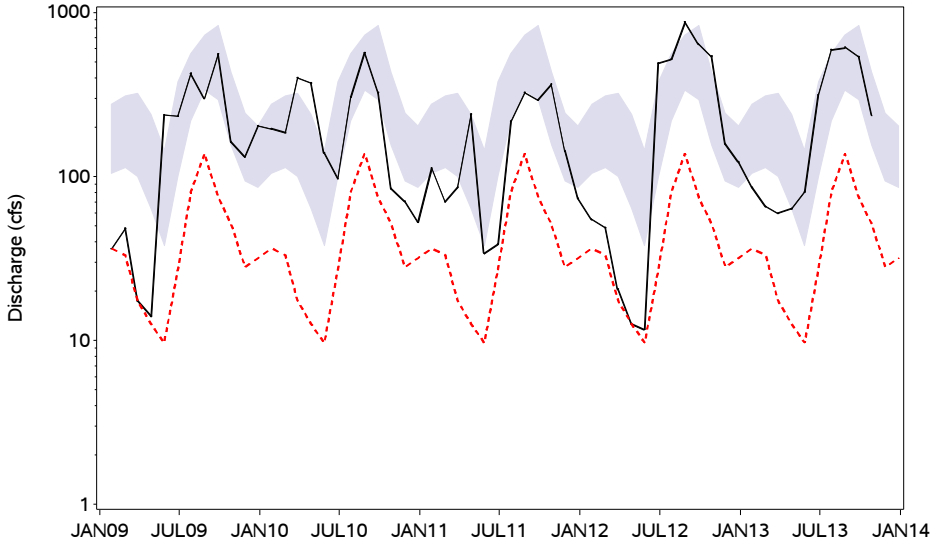

Little Manatee R near Wimauma
Central Counties

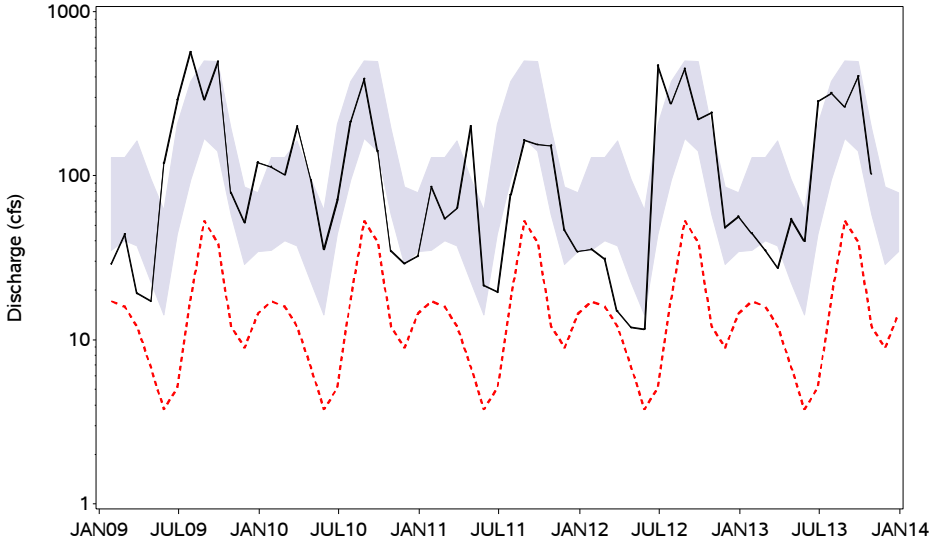

Peace River at Bartow
Central Counties

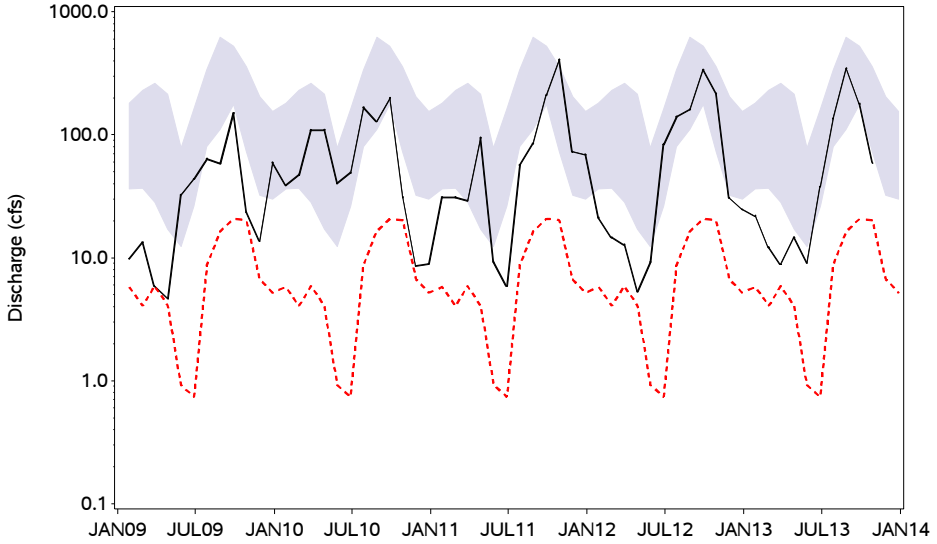

Monthly Mean Discharge
POR Monthly Low
Normal Range

HYDROGRAPHS OF MAJOR STREAMS
JANUARY 2009 TO OCTOBER 2013

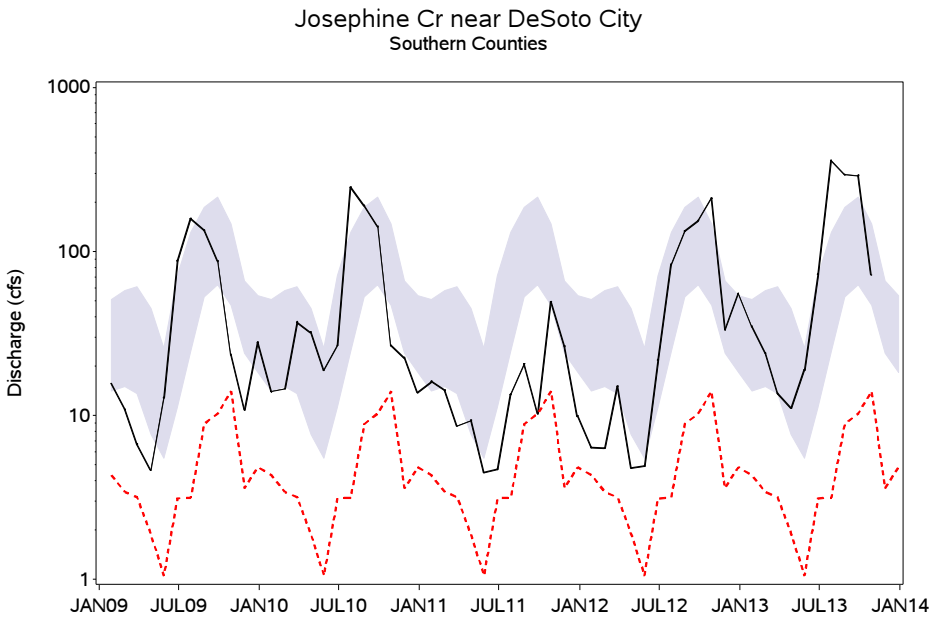

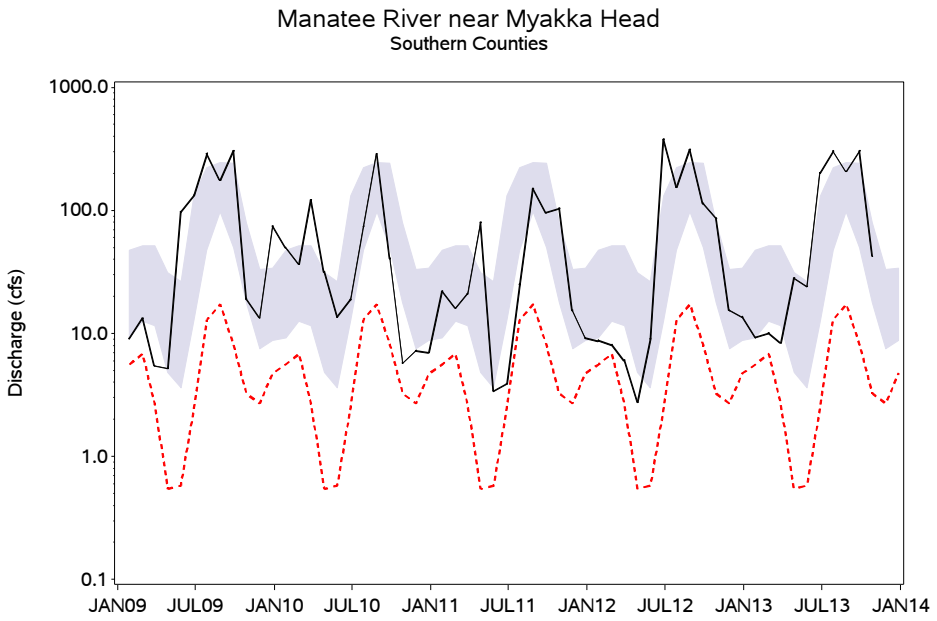

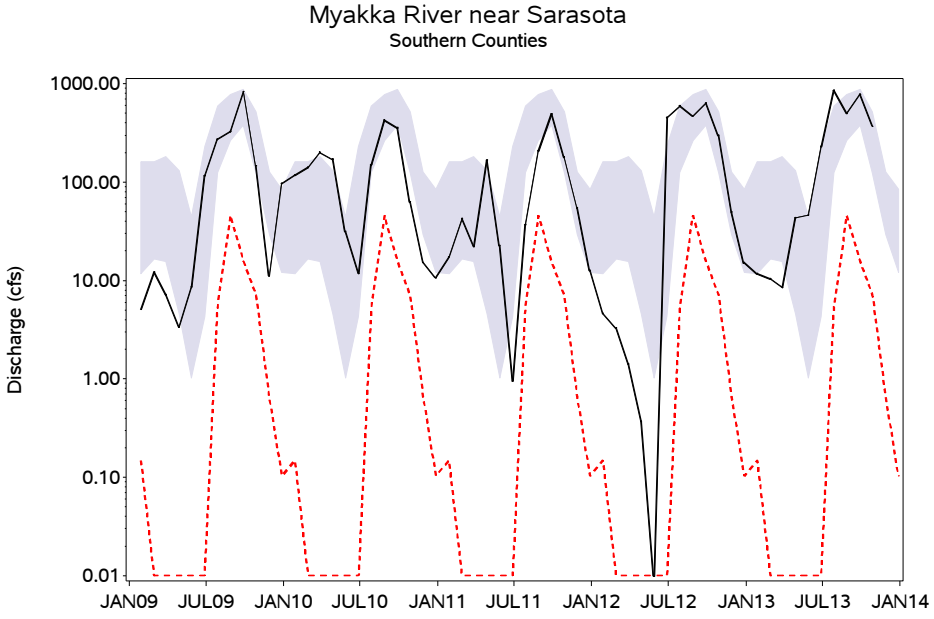

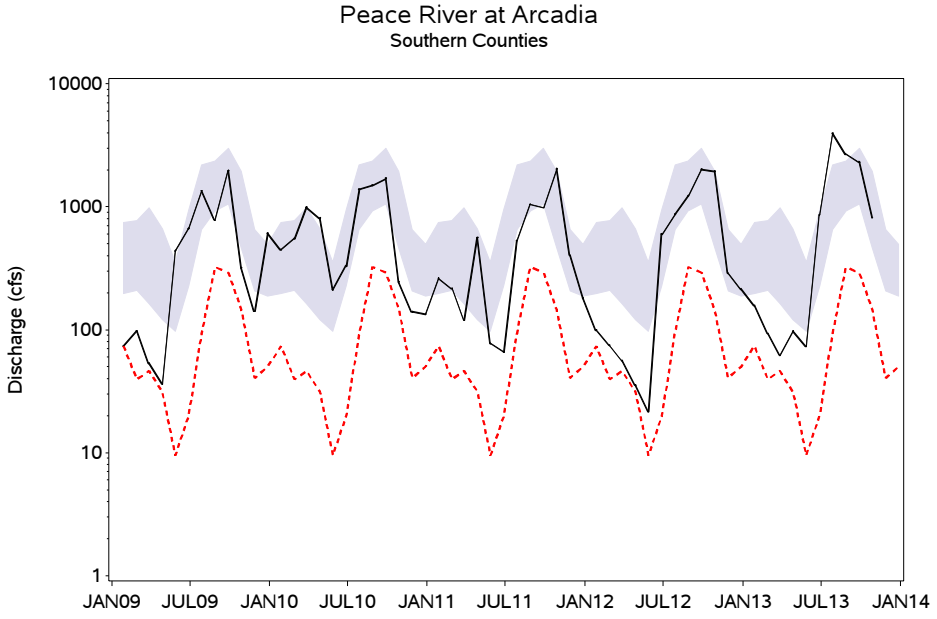

Monthly Mean Discharge POR Monthly Low Normal Range

Springs

The District processes springflow data collected by Tampa Bay Water through a mutual agreement and by the U.S. Geological Survey (USGS) under a cooperatively funded program between the District and the USGS. Springflow is monitored at seven gauging stations in two regions of the District (see index map in the Appendix). Springflow data for Rainbow, Silver and Sulphur Springs are recorded as daily water levels. The USGS uses rating curves developed for these springs from historical water level elevations to calculate springflow discharge in units of cubic feet per second (cfs). Crystal and Weeki Wachee Springs discharge (cfs) is provided as an instantaneous reading calculated by the USGS. Buckhorn and Lithia Springs discharge is obtained from Tampa Bay Water biweekly and weekly, respectively. Period-of-record high and low values correspond to monthly theoretical means and not to peak events. Values are reported as percentiles calculated from an analysis of historical monthly means recorded during a given month. The percentile is the monthly mean ranked on a scale of zero to 100 that indicates the percent of period-of-record values that are above, equal to or below the median (50^{th} percentile) for the current month. The values reported are provisional, and are subject to revision at the end of the water year. Revised USGS springflow data are loaded into the District's WMIS when they become available.

Hydrographs are produced for the seven-springflow stations, and current values are compared to respective 25^{th} and 75^{th} percentiles that are calculated from historical data. The 25^{th} and 75^{th} percentiles are calculated using the SAS™ software system for data analysis using period-of-record monthly theoretical means for each springflow station analyzed.

In October, five of the seven stations reported increased springflow, compared to the previous month. Total springflow increased in the northern region by 55.8 cfs (36.1 mgd), while it decreased in the central region by 8.1 cfs (5.2 mgd). District-wide, springflow increased by 47.7 cfs (30.9 mgd).

Total springflow recorded at four of the seven stations was lower in October 2013 than October 2012. Total springflow for the northern region was lower by 45.5 cfs (29.4 mgd), while springflow in the central region was mathematically the same as the flow last year. District-wide, springflow decreased by 45.5 cfs (29.4 mgd), compared to October 2012 rates.

Compared to historical period-of-record values for October, total springflow measured in Rainbow, Silver and Weeki Wachee Springs, in the northern region, was in the 27^{th}, 5^{th} and 81^{st} percentiles of respective historical readings. Springflow measured in Crystal, Sulphur, Buckhorn and Lithia Springs in the central region was in the 8^{th}, 15^{th}, 69^{th} and 91^{st} percentiles, respectively, of historical October readings.

SUMMARY OF SPRINGS DISCHARGE FROM MAJOR SPRINGS (CFS), OCTOBER 2013

NORTHERN COUNTIES	*OCT 2013 Discharge*	*SEP 2013 Discharge*	*OCT 2012 Discharge*	*Change From SEP 2013*	*Change From OCT 2012*	*OCT 2013 Percentile Rank*	*Period of Record Low*	*Record Low Date*	*Period of Record High*	*Record High Date*
Rainbow Springs	627.5	593.4	609.1	34.1	18.4	27%	391.0	MAY2012	1060.0	SEP1988
Silver Springs	527.3	513.6	588.5	13.7	-61.2	5%	141.0	JUN2012	1290.0	OCT1960
Weeki Wachee Springs	199.6	191.6	202.3	8.0	-2.7	81%	101.0	JUN1994	257.0	OCT2004
CENTRAL COUNTIES										
Crystal Springs	42.0	40.9	44.3	1.1	-2.3	8%	25.7	JUN2001	113.6	AUG1941
Sulphur Springs	26.5	28.8	32.2	-2.3	-5.7	15%	0.0	NOV2011	145.0	MAR1960
Buckhorn Springs	13.7	11.3	13.0	2.4	0.7	69%	2.2	MAY2006	32.7	AUG2004
Lithia Springs	60.0	69.3	52.7	-9.3	7.3	91%	9.1	MAY2000	91.5	NOV2004

HYDROGRAPHS OF REGIONAL SPRINGS
JANUARY 2009 TO OCTOBER 2013

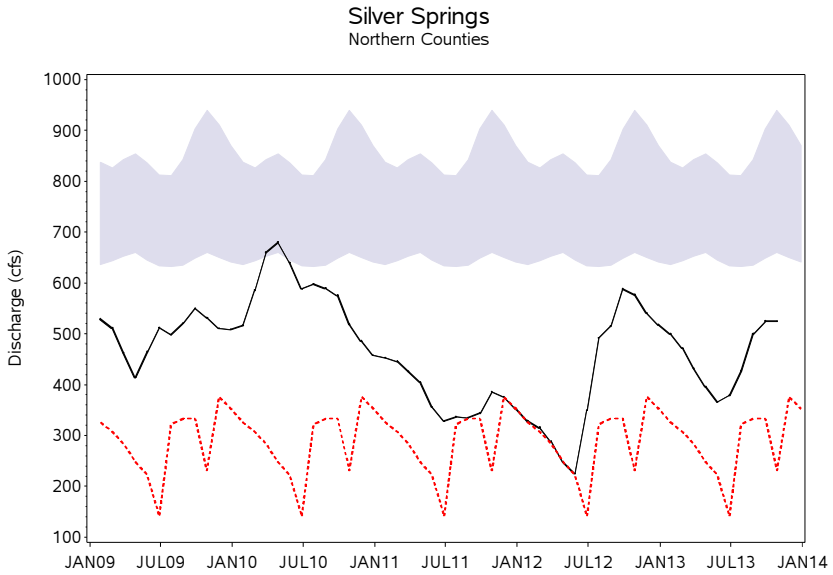

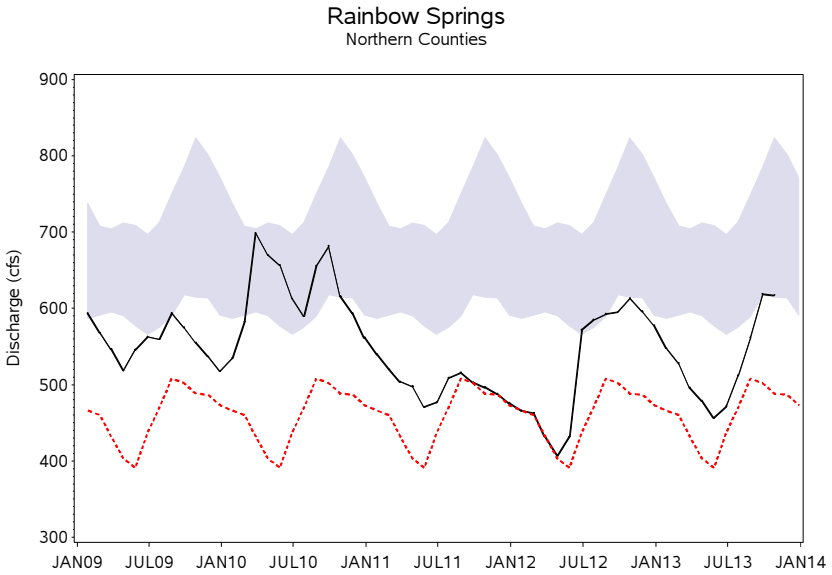

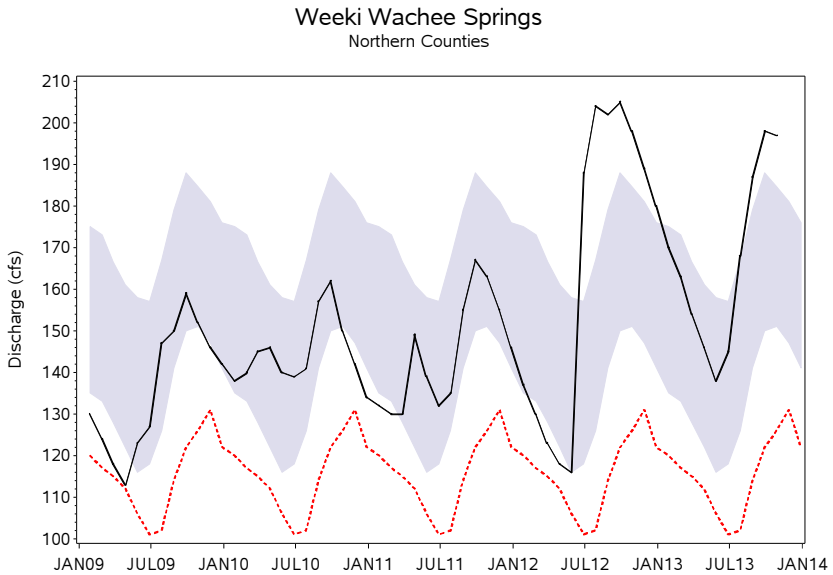

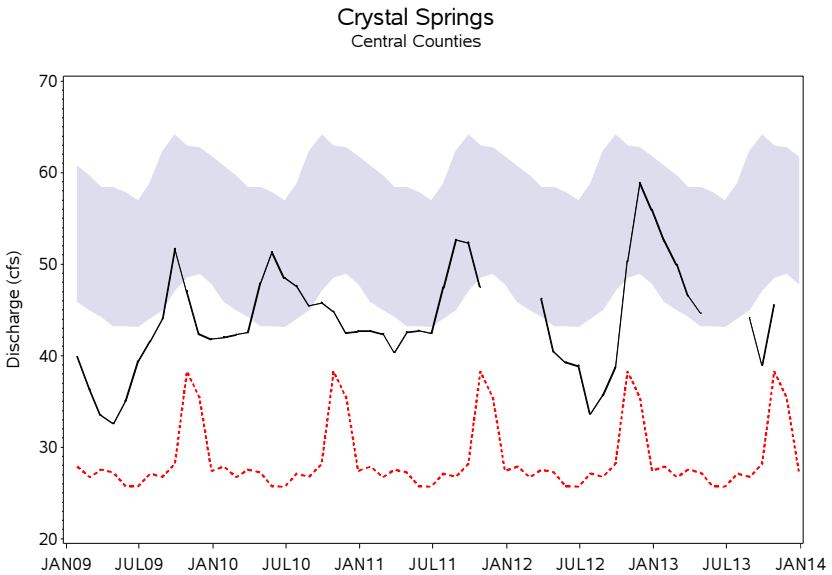

Monthly Discharge POR Monthly Low Normal Range

HYDROGRAPHS OF REGIONAL SPRINGS
JANUARY 2009 TO OCTOBER 2013

Sulphur Springs
Central Counties

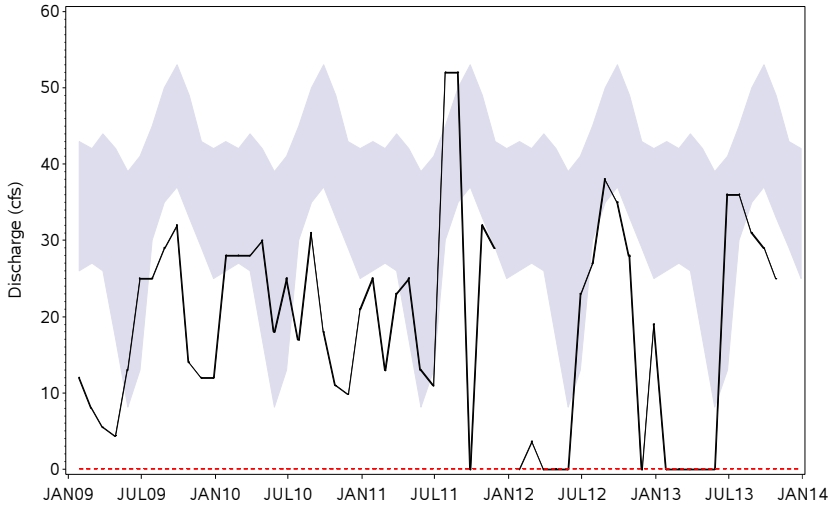

Buckhorn Spring
Central Counties

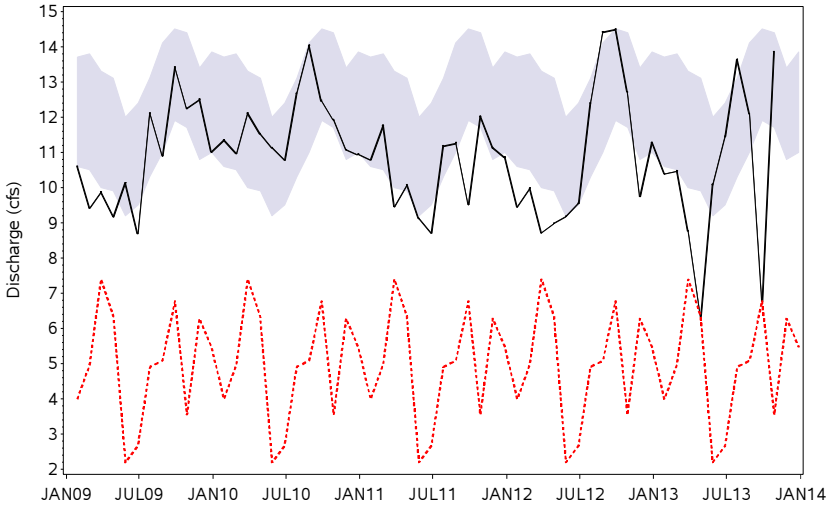

Lithia Springs
Central Counties

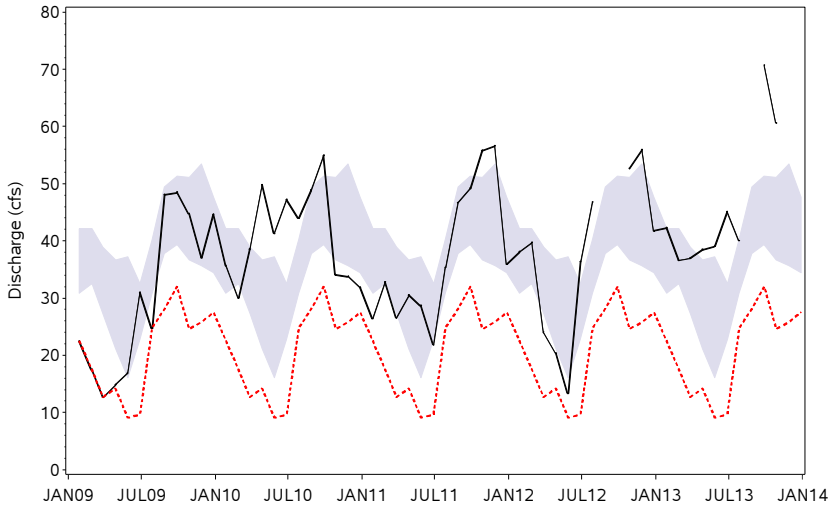

Monthly Discharge POR Monthly Low Normal Range

GROUND WATER

The ground-water section of this report has been revised and now provides ground-water level information within the District based on geographically delineated areas (regions) within the District, and no longer uses regional delineations based on hydrogeologic characteristics. The purpose for using geographical boundaries (only) has been to eliminate past confusion that resulted when regional ground-water data pertaining to the surficial aquifer and Intermediate/Floridan aquifer were reported based on hydrogeologic boundaries, while the Aquifer Resource Index section reported ground-water data based on geographic boundaries. This change should provide consistency in the review and reporting of all ground-water information.

For this report, the District has been divided into three geographical regions that are defined by county boundaries (see index maps in the Appendix). Each regional area includes all or part of each county that is located within that region and that is also within the District's jurisdictional boundaries. The northern region includes the counties of Citrus, Hernando, Lake, Levy, Marion and Sumter, where the Floridan aquifer is generally unconfined and at or near land surface, allowing rainfall to easily recharge (replenish) the aquifer system. The central region includes the counties of Hillsborough, Pasco, Pinellas and Polk, where the Floridan aquifer can be unconfined, semi-confined or confined (overlain by thick clays). Where the Floridan aquifer is confined, recharge to the aquifer from rainfall is low. The southern region includes the counties of Charlotte, DeSoto, Hardee, Highlands, Manatee and Sarasota, where the Floridan aquifer is confined.

Twelve surficial aquifer (shallow, non-artesian) and 51 intermediate and Floridan aquifer (deep) monitor wells are measured for this report to determine the relative health of ground-water levels District-wide. Only monitor wells with an adequate and reliable period-of-record water level measurements were selected for the network. For each well, the 25^{th} and 75^{th} percentiles ("low normal" and "high normal," respectively) were calculated for each week of the year using the period-of-record data. The 25^{th} and 75^{th} percentiles are used to represent the lower and upper limits of the normal range, as they are considered a reliable and robust measure of the normal range, and are less affected by extremes in the data record. The end-of month water-level readings measured for this report are compared to their corresponding normal ranges. Trend data from 16 intermediate and Floridan aquifer wells are shown in hydrographs to compare current water levels to the low normal and high normal levels.

Data from these wells are further compiled into regional statistics for the three regions of the District. Wells in the northern counties are unconfined and non-artesian, while those in the southern counties are confined and artesian. Wells included in the central counties vary between confined and unconfined conditions due to the transitional nature of geology in this area. The potentiometric levels of representative Floridan aquifer wells are used to produce the potentiometric surface maps presented in this report.

Surficial Aquifer

During October, eleven of the 12 surficial aquifer wells recorded water level decreases, compared to last month. Regionally, average surficial aquifer water levels decreased in the northern, central and southern regions of the District by 0.55 foot, 0.57 foot and 1.38 feet, respectively. District-wide, average surficial aquifer water levels decreased by 0.77 foot.

In October, average water levels in six of the 12 surficial aquifer wells were lower than October 2012 levels. Average surficial aquifer water levels were lower in the northern and central regions by 0.60 and 0.10 foot, respectively, while they were higher in the southern region by 0.41 foot. District-wide, average water levels in surficial wells were 0.06 foot lower than October 2012 levels.

For October, water levels were above the low normal level in all 12 surficial wells. Average surficial aquifer water levels in the northern, central and southern regions were 1.44, 1.91 and 1.64 feet, respectively, above the low normal level. District-wide, the average water level in surficial wells was 1.76 feet above the low normal level.

SUMMARY OF SURFICIAL AQUIFER LEVELS IN REPRESENTATIVE WELLS, OCTOBER 2013

NORTHERN COUNTIES	*OCT 2013 Elev*	*SEP 2013 Elev*	*OCT 2012 Elev*	*Change From SEP 2013*	*Change From OCT 2012*	*OCT Historical Low Normal*	*OCT Historical High Normal*	*Departure From Low Normal*	*Period of Record Low*	*Record Low Date*	*Period of Record High*	*Record High Date*
Green Swamp	90.87	91.75	90.75	-0.88	0.12	89.31	91.24	1.56	82.95	MAY2000	93.07	SEP1985
Lecanto 2	8.91	9.13	10.24	-0.22	-1.33	7.59	10.00	1.32	5.76	MAY2001	13.92	SEP1974
CENTRAL COUNTIES												
Loughman	92.09	91.99	91.56	0.11	0.53	91.50	92.77	0.59	88.40	JUN2001	95.79	SEP2004
Lutz-Lake Fern	57.48	58.22	58.02	-0.74	-0.54	56.72	57.56	0.76	52.64	NOV2009	60.81	OCT1983
ROMP 50 Shallow	42.18	42.86	42.10	-0.68	0.09	41.34	41.91	0.84	38.01	OCT2010	44.05	SEP2001
SR 33 & Combee Road	133.15	133.56	133.85	-0.41	-0.70	133.08	134.61	0.07	129.16	FEB2001	136.97	OCT1995
SR 577 Shallow	126.82	127.69	127.01	-0.87	-0.18	120.97	125.07	5.85	109.99	JAN2000	129.26	SEP2013
Tarpon Road Shallow	13.54	14.35	13.58	-0.81	-0.04	11.36	13.40	2.18	9.31	JUN1978	16.93	SEP1971
USGS P-48	101.85	102.43	101.68	-0.58	0.17	98.81	101.43	3.04	96.07	JUN2001	104.79	SEP2004
SOUTHERN COUNTIES												
Edgeville 4 Shallow	67.27	69.02	67.34	-1.75	-0.07	66.86	68.05	0.41	63.85	MAY1975	69.93	SEP1971
ROMP 26 Shallow	71.39	72.64	70.53	-1.25	0.86	69.03	71.12	2.36	64.32	JUN1999	75.11	JUN1982
SR 74	17.42	18.57	16.99	-1.15	0.43	15.27	16.07	2.15	12.66	MAY2000	18.78	AUG2013

Intermediate and Floridan Aquifers

In October, 46 of the 51 intermediate and Floridan aquifer wells monitored for this report recorded water level decreases, compared to last month. Regionally, average water levels decreased in the northern, central, and southern regions by 0.41 foot, 1.79 feet and 4.49 feet, respectively. District-wide, the average water level in the intermediate and Floridan aquifer decreased by 2.42 feet.

During October, water levels in 35 of the 51 intermediate and Floridan aquifer wells were lower than those measured in October 2012. Regionally, the mean water level in the northern, central and southern regions was 1.05 feet, 0.22 foot and 0.23 foot, respectively, below October 2012 levels. District-wide, average water levels in intermediate and Floridan aquifer wells were 0.45 foot lower than last year.

For October, 48 of the 51 intermediate and Floridan aquifer wells had levels above the low normal level, compared to historical monthly levels. The average water levels in the northern, central and southern regions were 1.77, 4.67 and 2.30 feet, respectively, above the low normal level. District-wide, the average water level in intermediate and Floridan aquifer wells was 2.99 feet above the low normal level.

SUMMARY OF INTERMEDIATE AND FLORIDAN AQUIFER LEVELS IN REPRESENTATIVE WELLS, OCTOBER 2013

Regional Summary:

Region	OCT 2013 Mean Elevation	OCT 2013 Relation to POR Median	OCT 2013 Relation to 25th Percentile	OCT 2013 Mean Percentile Rank	SEP 2013 Mean Percentile Rank	OCT 2012 Mean Percentile Rank
Northern Counties	38.32	0.19	1.93	54%	59%	66%
Central Counties	58.41	1.63	4.23	70%	82%	71%
Southern Counties	33.12	0.48	3.00	54%	74%	52%

Regional Wells Summary:

NORTHERN COUNTIES	OCT 2013 Elev	SEP 2013 Elev	OCT 2012 Elev	Change From SEP 2013	Change From OCT 2012	OCT Historical Low Normal	OCT Historical High Normal	Departure From Low Normal	OCT 2013 Percentile Rank	Period of Record Low	Record Low Date	Period of Record High	Record High Date
CE 14 Dunnellon Deep	38.44	38.49	40.29	-0.05	-1.85	37.34	42.98	1.10	31%	31.94	MAY2012	60.24	MAR1966
Chassahowitzka 1 Deep	6.96	7.45	7.70	-0.49	-0.74	6.39	7.69	0.57	50%	4.78	JUN2001	9.74	SEP2004
Inverness Dot Fldn	28.76	28.79	31.38	-0.03	-2.62	27.69	32.61	1.07	30%	21.68	JUN2001	37.80	OCT1982
Mascotte Deep	100.15	100.76	101.42	-0.61	-1.27	98.22	99.80	1.93	86%	93.94	JUN2000	102.66	SEP1988
ROMP 103 Suwannee/Ocala	43.51	42.68	45.81	0.83	-2.30	38.15	44.06	5.36	75%	33.75	MAY2009	51.03	OCT2004
ROMP 107 Ocala/Avon Park	13.57	13.38	15.42	0.19	-1.85	11.67	14.95	1.90	51%	8.08	AUG2007	19.78	NOV1982
ROMP 134 Ocala/Avon Park	44.57	44.22	43.62	0.35	0.95	43.42	47.81	1.15	44%	37.80	JUN2012	57.35	APR1998
ROMP 89 Ocala	91.76	93.97	92.07	-2.21	-0.31	89.65	91.97	2.11	69%	82.44	JUN2000	94.93	DEC1997
ROMP 97 Avon Park	19.65	19.85	20.29	-0.20	-0.64	16.44	21.92	3.21	57%	11.84	MAY2009	26.24	SEP2004
ROMP Tr 124 Avon Park	3.12	3.62	3.44	-0.50	-0.32	2.55	3.25	0.57	70%	0.77	SEP2004	24.32	OCT2013
ROMP Tr 21-2 Ocala/Avon Pk	1.92	2.28	2.25	-0.36	-0.33	1.69	2.28	0.23	45%	-0.06	DEC1990	4.56	NOV1987
Sumter 13 JC 59 Up Fldn	41.55	43.08	43.00	-1.53	-1.45	40.43	43.11	1.12	43%	36.52	MAY2012	46.97	SEP2004
Webster City Fldn	82.17	83.50	84.08	-1.33	-1.91	80.26	84.69	1.91	48%	74.16	MAY2012	88.77	SEP2005
Weeki Wachee Deep Repl	18.03	17.87	18.11	0.16	-0.08	15.52	20.40	2.51	54%	10.37	MAY2009	23.61	AUG1984

Regional Wells Summary (continued):

CENTRAL COUNTIES	*OCT 2013 Elev*	*SEP 2013 Elev*	*OCT 2012 Elev*	*Change From SEP 2013*	*Change From OCT 2012*	*OCT Historical Low Normal*	*OCT Historical High Normal*	*Departure From Low Normal*	*OCT 2013 Percentile Rank*	*Period of Record Low*	*Record Low Date*	*Period of Record High*	*Record High Date*
Bexley 2 Fldn	62.27	63.73	62.41	-1.46	-0.14	60.59	61.86	1.68	89%	56.08	JUN2000	64.07	SEP1988
Hills State Pk Parking Deep	40.14	43.11	41.10	-2.97	-0.96	37.76	40.10	2.38	76%	35.35	JUN2000	47.42	DEC1997
Lk Alfred Deep nr Lake Alfre	127.53	128.70	127.54	-1.17	-0.01	126.37	128.42	1.16	50%	119.85	MAY1974	131.62	OCT1960
Lykes Pasco Fldn	68.85	69.21	70.22	-0.36	-1.37	64.15	69.35	4.70	74%	56.94	JUN2000	75.78	OCT2004
Masaryktown Deep	38.76	36.52	36.36	2.24	2.40	28.21	42.48	10.55	62%	0.09	OCT2013	50.32	SEP1984
Moon Lake Deep	31.85	33.17	31.44	-1.32	0.41	29.89	31.42	1.96	90%	26.10	JUN2000	34.38	MAR1998
Pasco Well 13 nr Drexel Fldn	72.74	74.36	73.02	-1.62	-0.28	72.18	73.73	0.56	42%	68.00	JUN2001	77.14	JUL1960
Pinellas 665 Fldn	9.18	10.24	8.87	-1.06	0.31	9.42	11.52	-0.24	18%	6.70	MAY2006	14.79	SEP1959
ROMP 45 Avon Park	73.94	79.43	75.44	-5.49	-1.50	63.68	72.00	10.26	81%	31.75	MAY1981	84.44	OCT2004
ROMP 50 Avon Park	8.35	10.76	6.98	-2.41	1.37	3.93	8.34	4.42	76%	-32.77	FEB2004	14.95	AUG1982
ROMP 59 Swnn/AvPk	74.82	80.10	76.45	-5.28	-1.63	58.92	72.18	15.90	84%	33.33	MAY1981	85.92	OCT2004
ROMP 66 Tampa	19.87	21.13	21.38	-1.26	-1.51	17.20	19.65	2.67	79%	12.04	JUN1977	24.51	DEC1997
ROMP 87 Avon Park	102.99	104.75	103.49	-1.76	-0.50	101.65	103.43	1.34	61%	94.88	JUN2000	105.82	DEC1997
ROMP 93 Swnn/AvPk	73.58	75.22	72.74	-1.64	0.84	66.37	73.08	7.21	81%	36.74	OCT2013	76.60	SEP1982
SR 52 Deep W nr Fivay Jct	53.32	54.64	53.44	-1.32	-0.12	52.00	53.30	1.32	79%	48.08	JUN2000	59.53	AUG2010
SR 577 Deep	93.79	95.09	94.58	-1.30	-0.79	85.23	93.23	8.56	78%	72.76	JUN2000	98.51	MAR1998
Sanlon Ranch Fldn	96.71	99.57	97.14	-2.86	-0.43	87.56	95.59	9.15	86%	66.38	MAY1975	105.27	OCT2004
Tarpon Rd Deep	10.49	11.63	10.59	-1.14	-0.10	10.10	10.83	0.39	55%	7.49	MAY2000	13.06	SEP1971

SOUTHERN COUNTIES	*OCT 2013 Elev*	*SEP 2013 Elev*	*OCT 2012 Elev*	*Change From SEP 2013*	*Change From OCT 2012*	*OCT Historical Low Normal*	*OCT Historical High Normal*	*Departure From Low Normal*	*OCT 2013 Percentile Rank*	*Period of Record Low*	*Record Low Date*	*Period of Record High*	*Record High Date*
Big Slough Deep	34.79	35.85	34.51	-1.06	0.28	33.23	34.18	1.56	90%	26.84	MAY2006	36.12	OCT1995
Edgeville 3 Deep	30.82	37.17	30.72	-6.35	0.10	28.75	36.35	2.07	45%	1.13	MAY2000	46.40	OCT1965
Englewood 14 Deep	7.16	9.09	5.97	-1.93	1.19	4.02	6.71	3.14	84%	-0.97	FEB2001	11.37	SEP1974
Florida Cities Test 1	7.73	13.57	4.21	-5.84	3.52	7.72	18.75	0.01	26%	-18.63	MAY1976	25.89	SEP1977
Kibler Deep	10.91	23.25	10.99	-12.34	-0.08	6.62	14.01	4.29	60%	-29.95	MAY2000	29.30	AUG1978
Manasota 14 Deep	19.37	20.08	19.12	-0.71	0.25	19.83	21.71	-0.46	23%	15.55	MAY2009	22.70	NOV1971
Marshall Deep	46.14	49.10	47.63	-2.96	-1.49	42.24	49.55	3.90	46%	8.96	JUN2000	55.24	MAR1964
ROMP 16 Ocala	47.81	50.02	49.36	-2.21	-1.55	46.57	49.02	1.24	48%	28.94	JAN2001	51.21	SEP1995
ROMP 26 Swnn/AvPk	46.68	49.67	48.16	-2.99	-1.48	43.09	47.62	3.59	58%	19.48	JAN2010	51.89	OCT1979
ROMP 28X Swnn/AvPk	70.84	73.73	71.13	-2.89	-0.29	67.66	70.79	3.18	76%	57.24	JAN2010	74.68	OCT1995
ROMP 30 Swnn/AvPk	49.85	57.07	53.36	-7.22	-3.51	44.56	52.60	5.29	57%	-0.20	JUN2000	60.52	MAR1998
ROMP 31 Swnn/AvPk	46.72	53.71	49.55	-6.99	-2.83	40.07	47.92	6.65	61%	-8.20	JUN2000	57.91	MAR1998
ROMP 32 L Ocala/Avon Park	31.97	39.43	32.50	-7.46	-0.53	25.71	32.83	6.26	72%	-17.74	JUN2000	44.73	FEB1998
ROMP 43XX Avon Park	88.85	92.15	89.45	-3.30	-0.60	85.19	90.07	3.66	65%	70.93	JAN2010	94.60	MAR1998
ROMP Tr 5-1 Suwannee	20.81	22.00	20.75	-1.19	0.06	19.17	20.92	1.64	73%	13.26	JUN2000	23.00	SEP1983
ROMP Tr 7-1 Tampa	19.21	21.76	19.10	-2.55	0.11	18.10	19.90	1.11	54%	10.01	JUN2000	23.56	SEP2003
Sarasota 11th St Deep	8.48	10.70	6.59	-2.22	1.89	7.86	11.22	-7.60	1%	-0.46	APR2012	19.31	SEP1979
Sarasota Service Office Up F	18.07	23.51	17.80	-5.44	0.27	17.04	27.23	1.03	34%	-3.24	JUN2000	35.21	MAR1931
Verna Test 0-1	17.99	27.60	17.73	-9.61	0.26	14.79	21.80	3.20	54%	-16.36	MAY2000	33.32	JAN1984

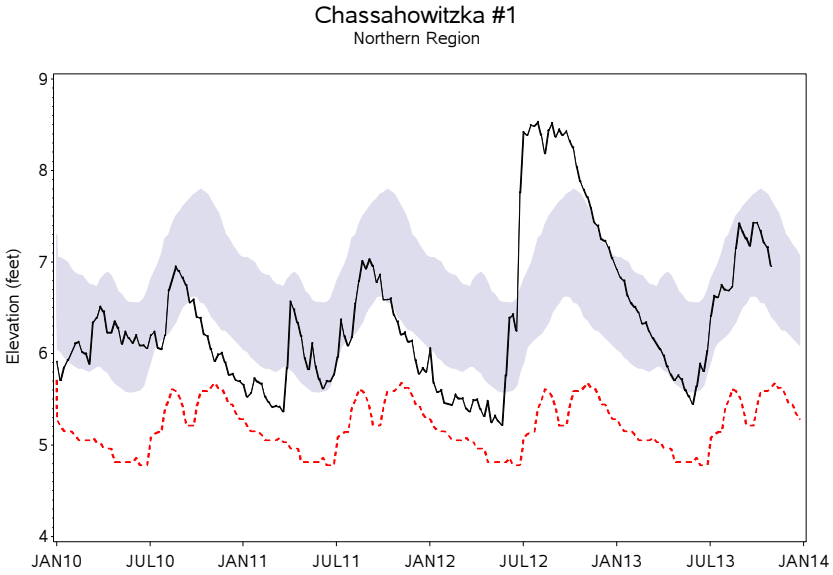
Chassahowitzka #1
Northern Region
Elevation (feet)
9
8
7
6
5
4
JAN10
JUL10
JAN11
JUL11
JAN12
JUL12
JAN13
JUL13
JAN14

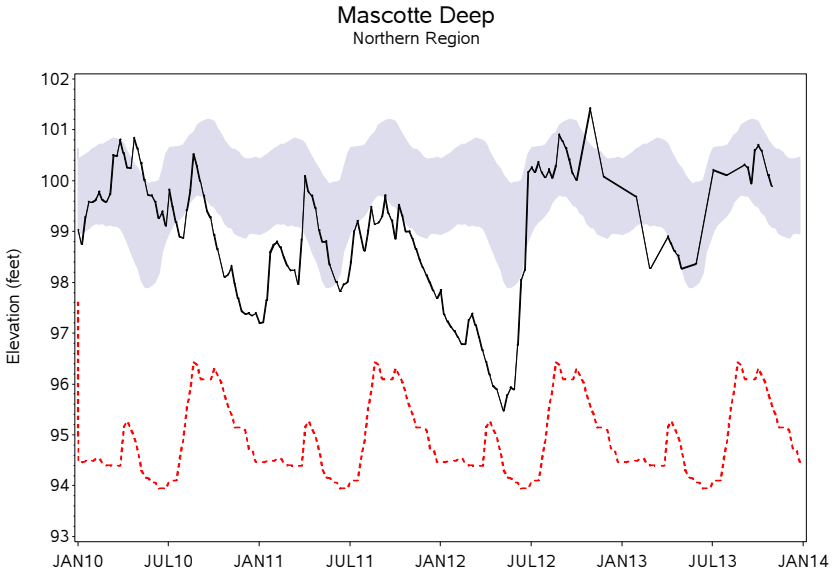
Mascotte Deep
Northern Region
Elevation (feet)
102
101
100
99
98
97
96
95
94
93
JAN10
JUL10
JAN11
JUL11
JAN12
JUL12
JAN13
JUL13
JAN14

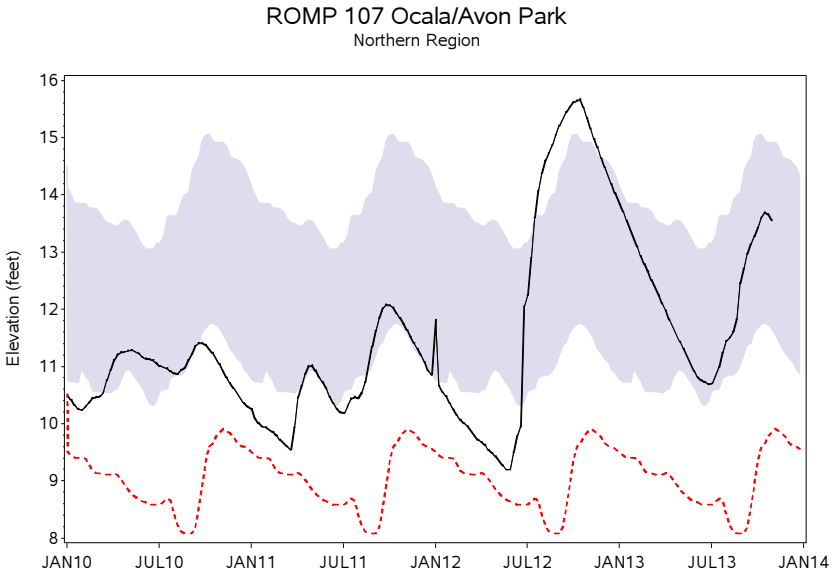
ROMP 107 Ocala/Avon Park
Northern Region
Elevation (feet)
16
15
14
13
12
11
10
9
8
JAN10
JUL10
JAN11
JUL11
JAN12
JUL12
JAN13
JUL13
JAN14

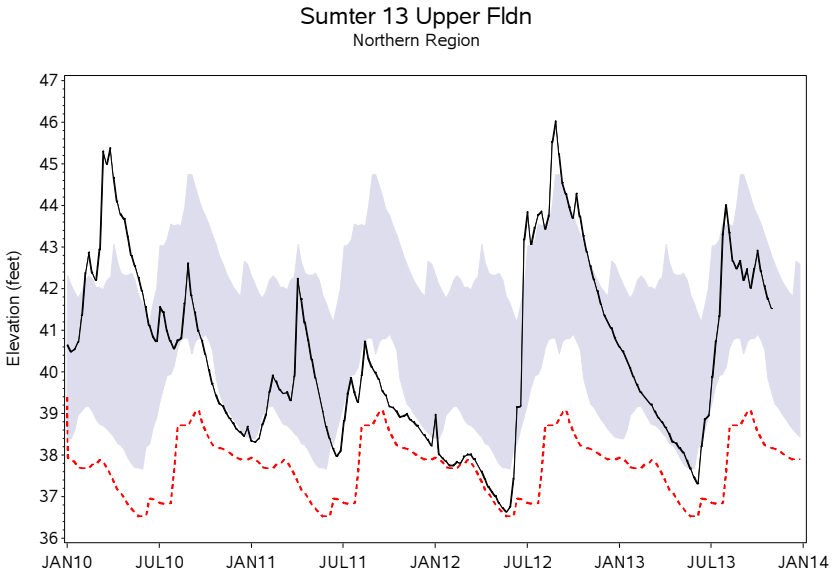
Sumter 13 Upper Fldn
Northern Region
Elevation (feet)
47
46
45
44
43
42
41
40
39
38
37
36
JAN10
JUL10
JAN11
JUL11
JAN12
JUL12
JAN13
JUL13
JAN14

Average Weekly Elevation
POR Weekly Low
Normal Range

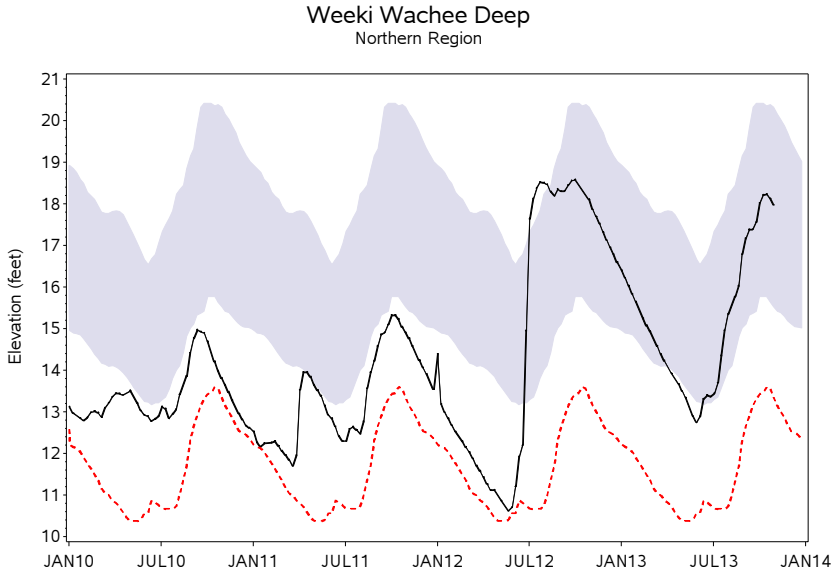
Weeki Wachee Deep
Northern Region
Elevation (feet)
21
20
19
18
17
16
15
14
13
12
11
10
JAN10
JUL10
JAN11
JUL11
JAN12
JUL12
JAN13
JUL13
JAN14

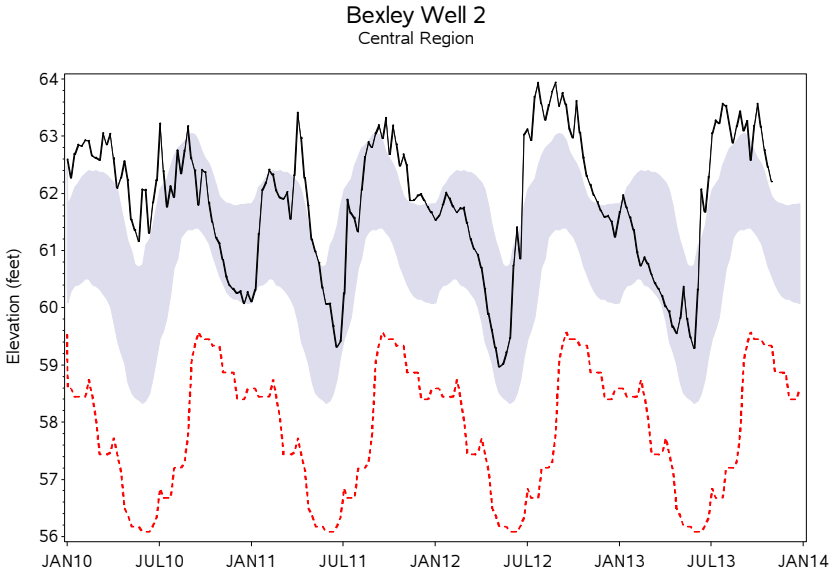
Bexley Well 2
Central Region
Elevation (feet)
64
63
62
61
60
59
58
57
56
JAN10
JUL10
JAN11
JUL11
JAN12
JUL12
JAN13
JUL13
JAN14

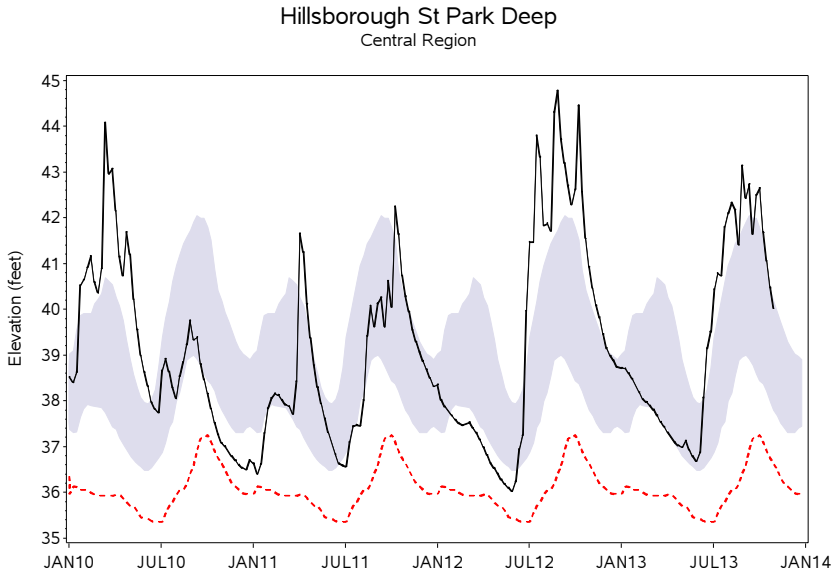
Hillsborough St Park Deep
Central Region
Elevation (feet)
45
44
43
42
41
40
39
38
37
36
35
JAN10
JUL10
JAN11
JUL11
JAN12
JUL12
JAN13
JUL13
JAN14

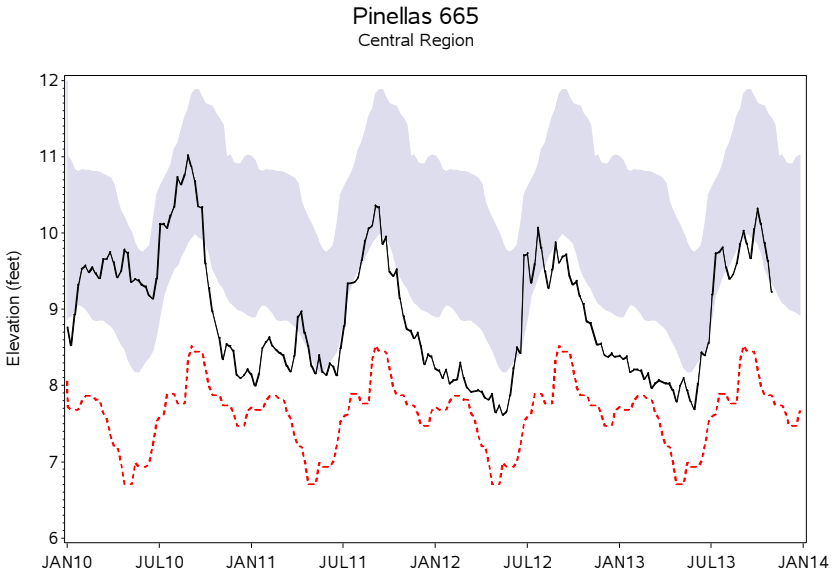
Pinellas 665
Central Region
Elevation (feet)
12
11
10
9
8
7
6
JAN10
JUL10
JAN11
JUL11
JAN12
JUL12
JAN13
JUL13
JAN14

Average Weekly Elevation
POR Weekly Low
Normal Range

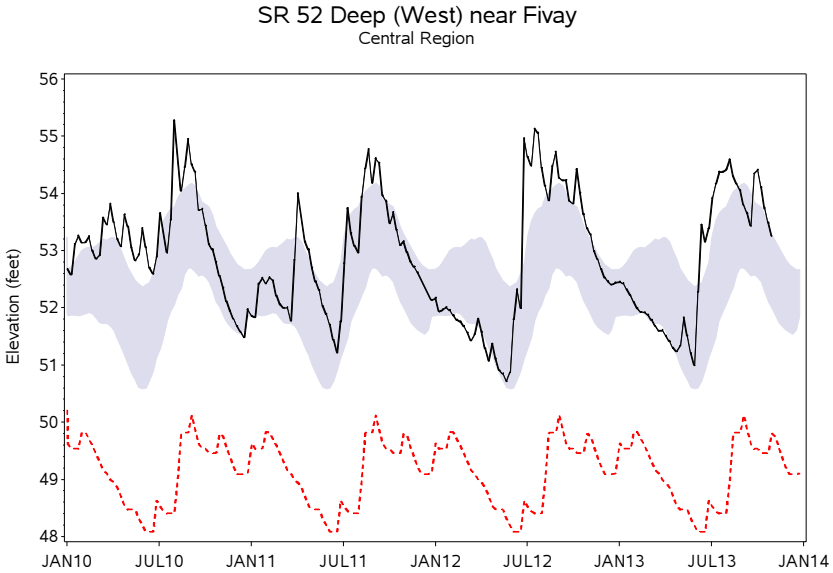
SR 52 Deep (West) near Fivay
Central Region
Elevation (feet)
56
55
54
53
52
51
50
49
48
JAN10
JUL10
JAN11
JUL11
JAN12
JUL12
JAN13
JUL13
JAN14

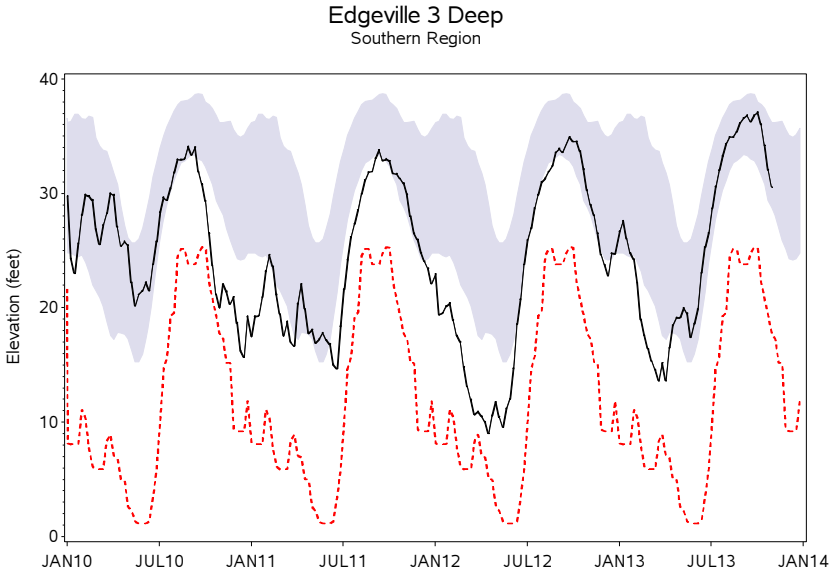
Edgeville 3 Deep
Southern Region
Elevation (feet)
40
30
20
10
0
JAN10
JUL10
JAN11
JUL11
JAN12
JUL12
JAN13
JUL13
JAN14

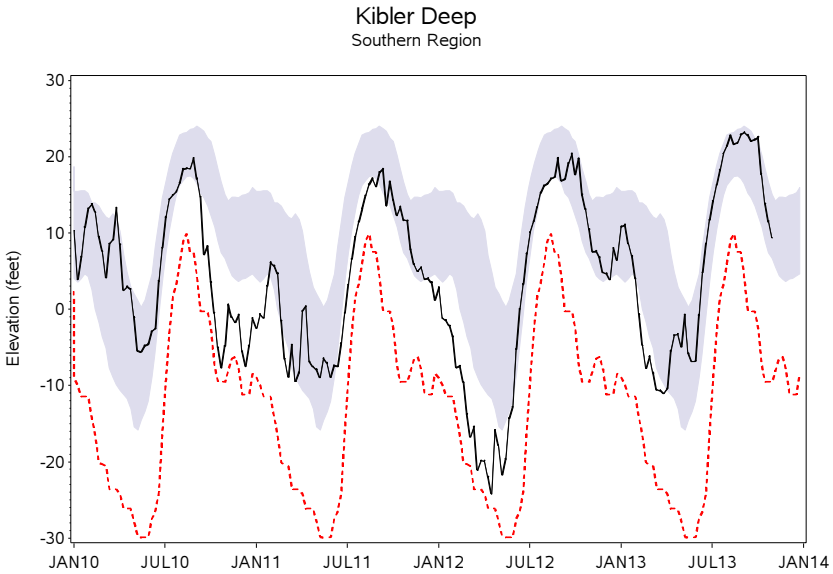
Kibler Deep
Southern Region
Elevation (feet)
30
20
10
0
-10
-20
-30
JAN10
JUL10
JAN11
JUL11
JAN12
JUL12
JAN13
JUL13
JAN14

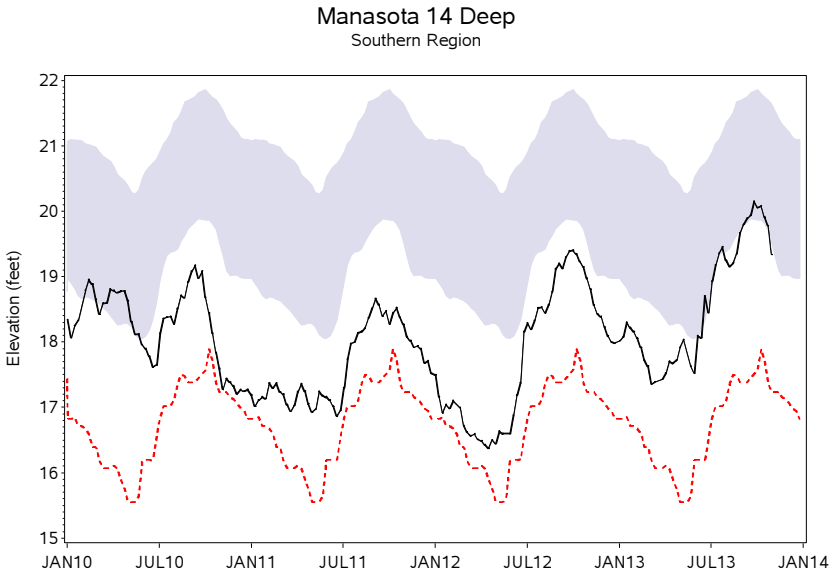
Manasota 14 Deep
Southern Region
Elevation (feet)
22
21
20
19
18
17
16
15
JAN10
JUL10
JAN11
JUL11
JAN12
JUL12
JAN13
JUL13
JAN14

Average Weekly Elevation
POR Weekly Low
Normal Range

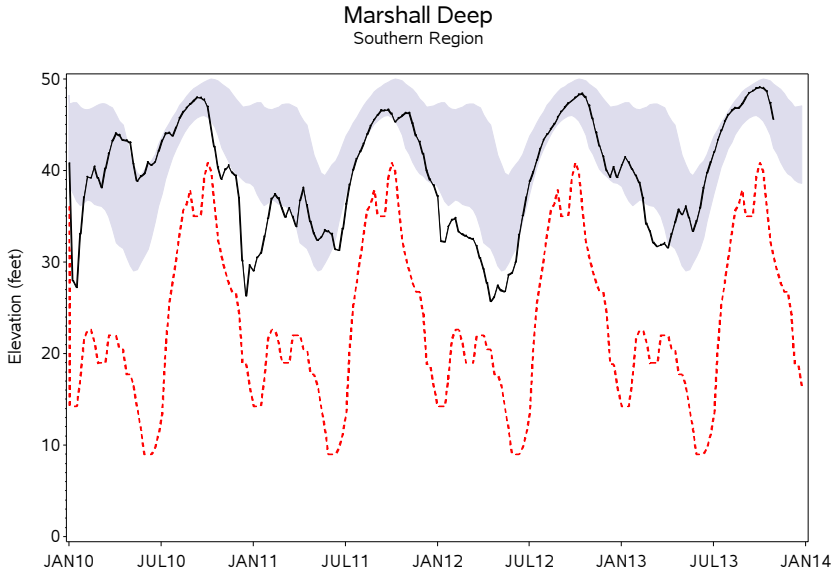
Marshall Deep
Southern Region
Elevation (feet)
50
40
30
20
10
0
JAN10
JUL10
JAN11
JUL11
JAN12
JUL12
JAN13
JUL13
JAN14

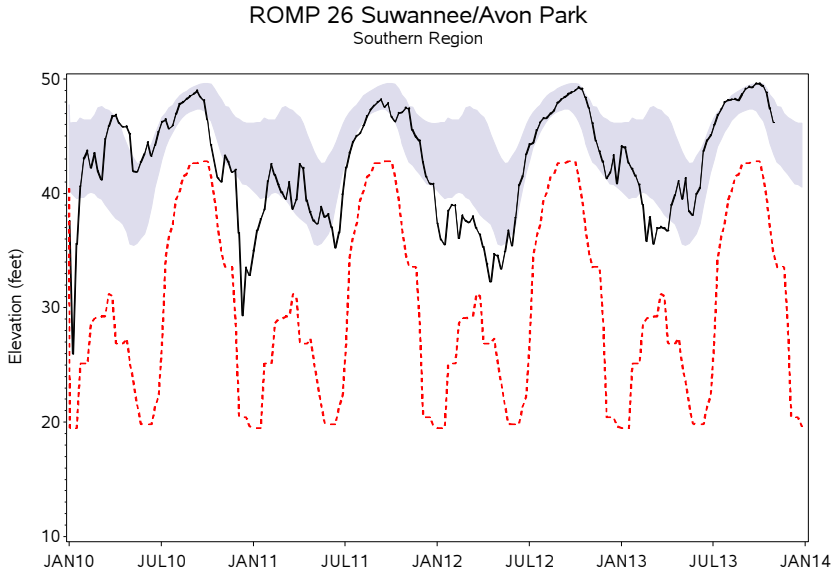
ROMP 26 Suwannee/Avon Park
Southern Region
Elevation (feet)
50
40
30
20
10
JAN10
JUL10
JAN11
JUL11
JAN12
JUL12
JAN13
JUL13
JAN14

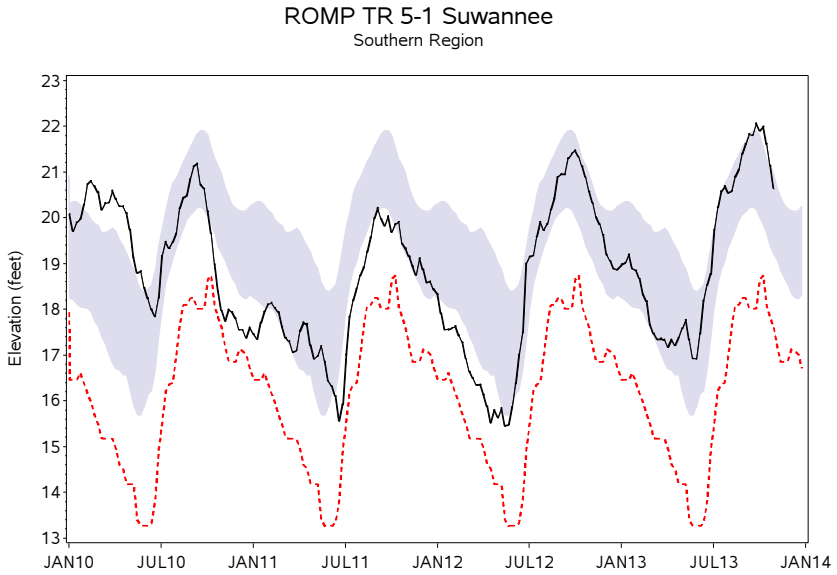
ROMP TR 5-1 Suwannee
Southern Region
Elevation (feet)
23
22
21
20
19
18
17
16
15
14
13
JAN10
JUL10
JAN11
JUL11
JAN12
JUL12
JAN13
JUL13
JAN14

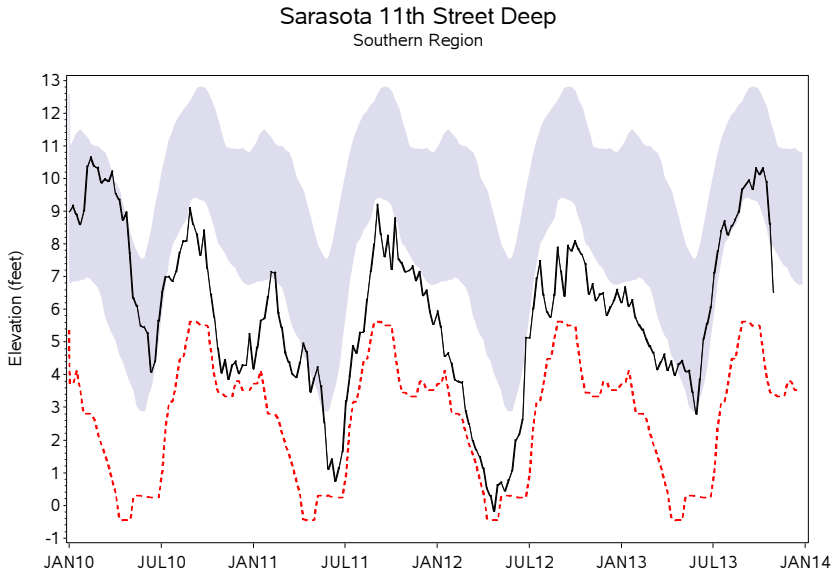
Sarasota 11th Street Deep
Southern Region
Elevation (feet)
13
12
11
10
9
8
7
6
5
4
3
2
1
0
-1
JAN10
JUL10
JAN11
JUL11
JAN12
JUL12
JAN13
JUL13
JAN14

Average Weekly Elevation
POR Weekly Low
Normal Range

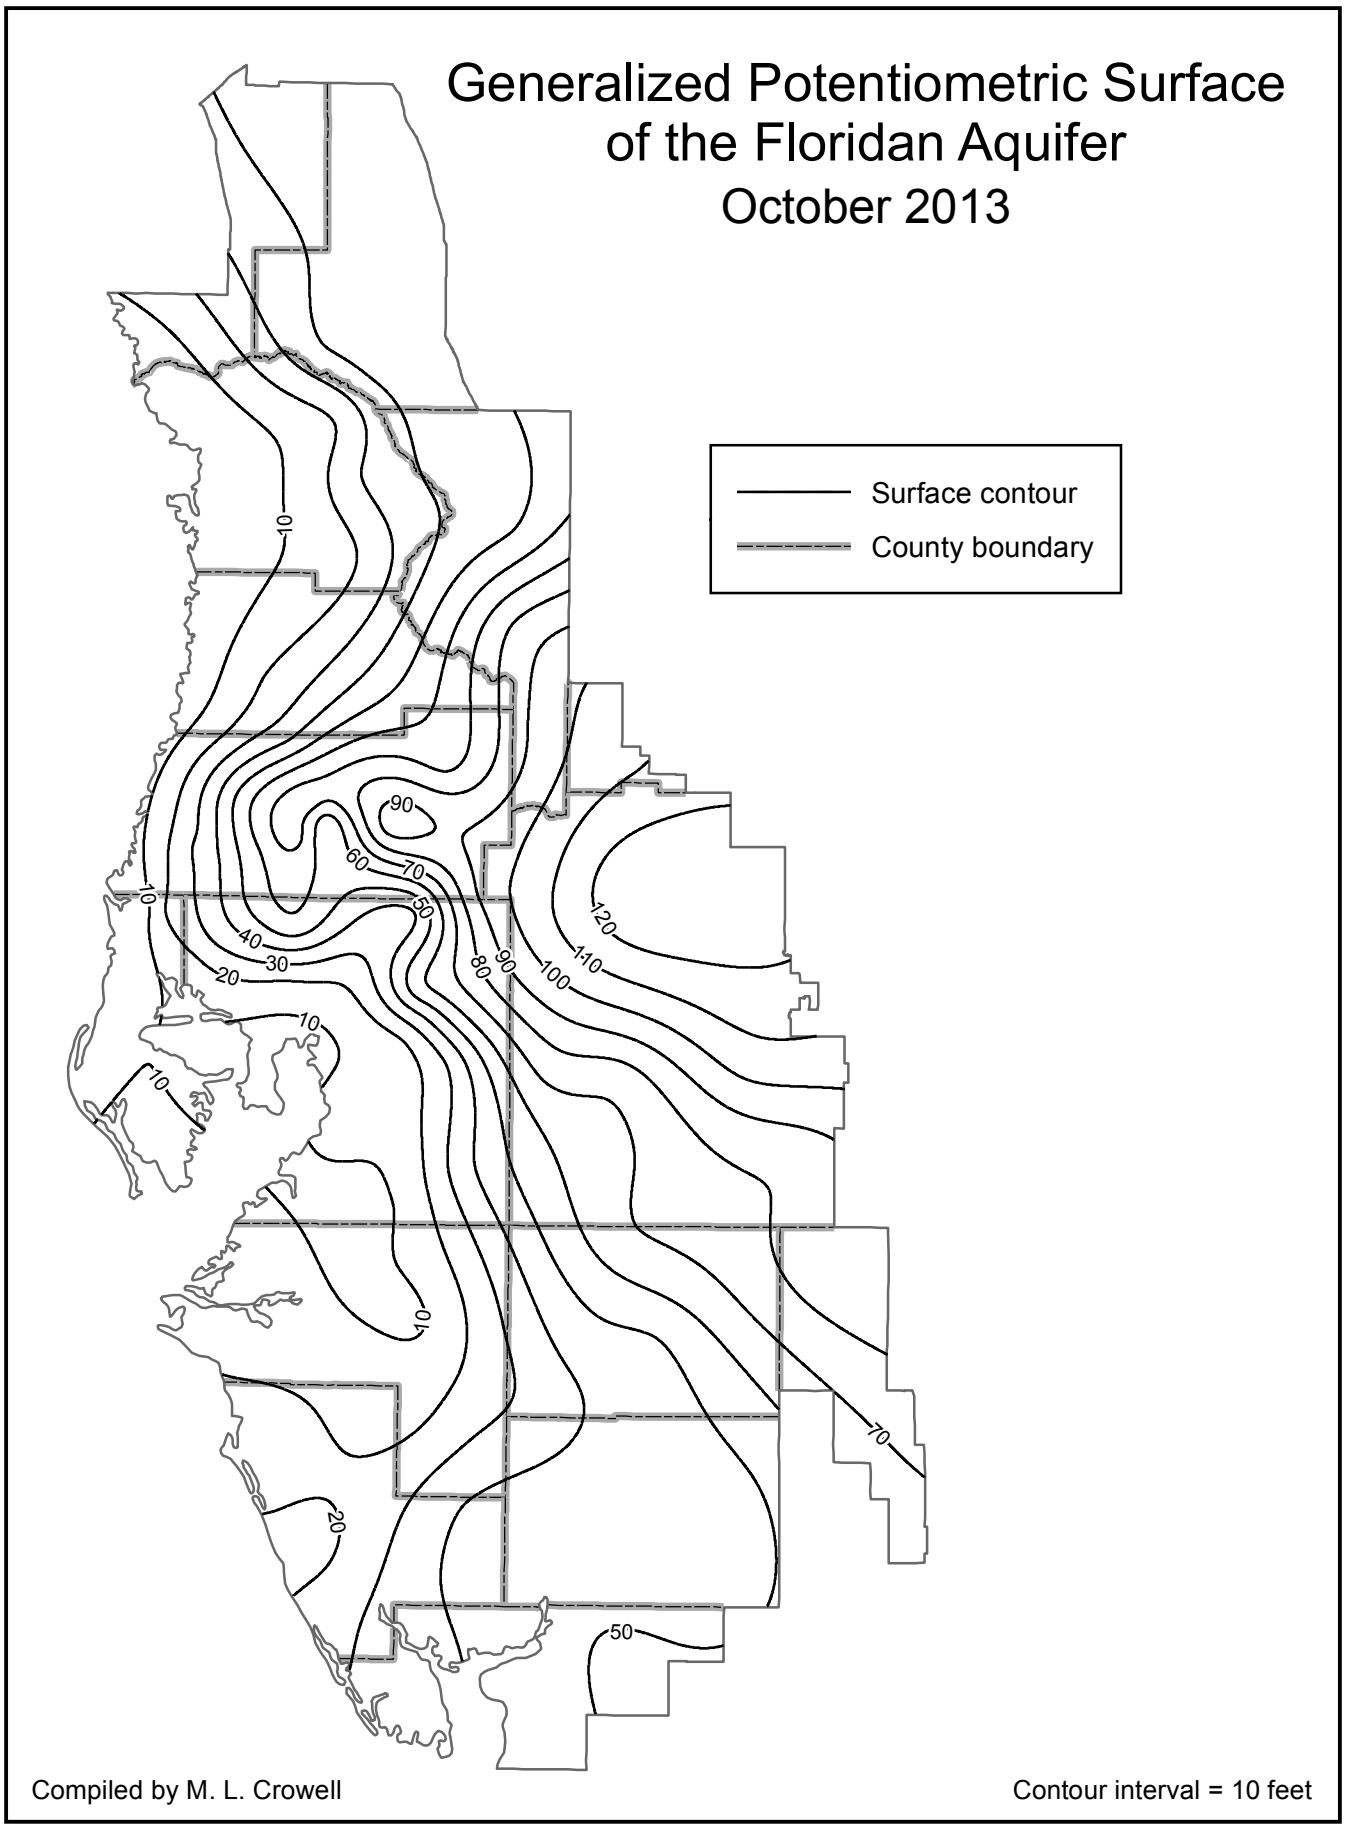
Generalized Potentiometric Surface
of the Floridan Aquifer
October 2013
Surface contour
County boundary
0
10
90
60
70
50
40
30
20
10
80
90
100
110
120
10
10
0
20
50
70
Compiled by M. L. Crowell
Contour interval = 10 feet

Generalized Change in the Potentiometric Surface of the Floridan Aquifer

September 2013 - October 2013

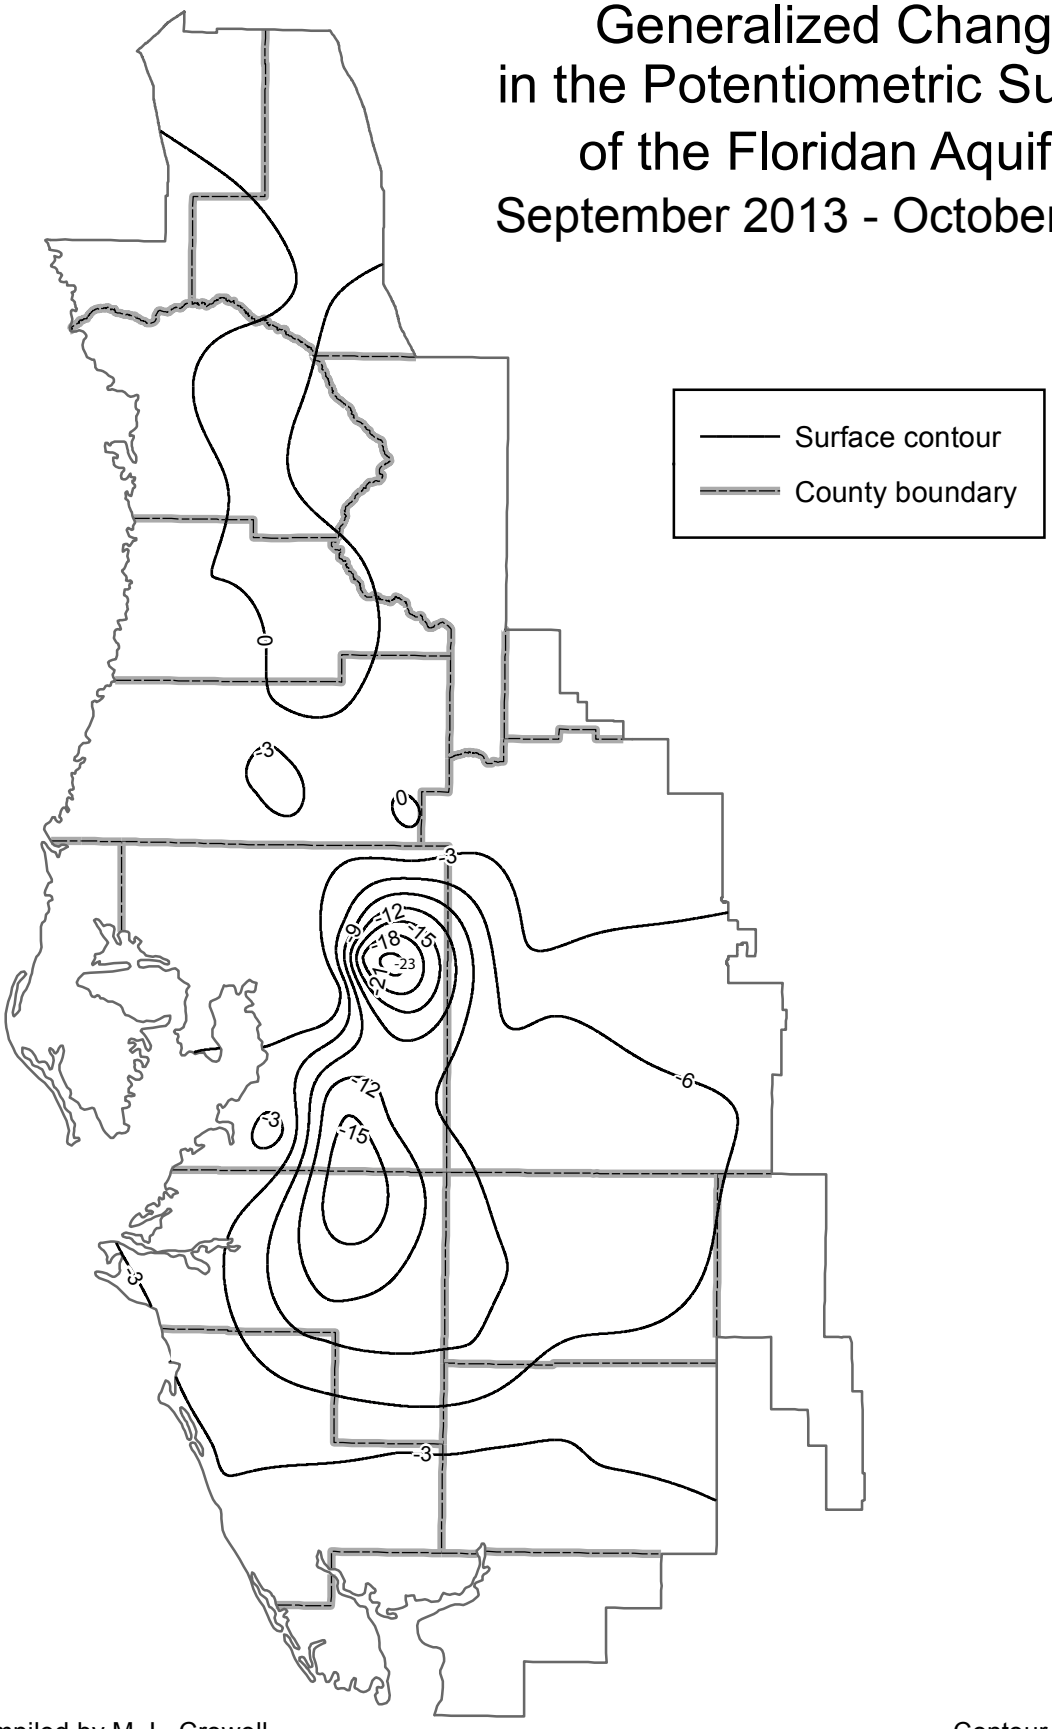

Compiled by M. L. Crowell

Contour interval = 3 feet

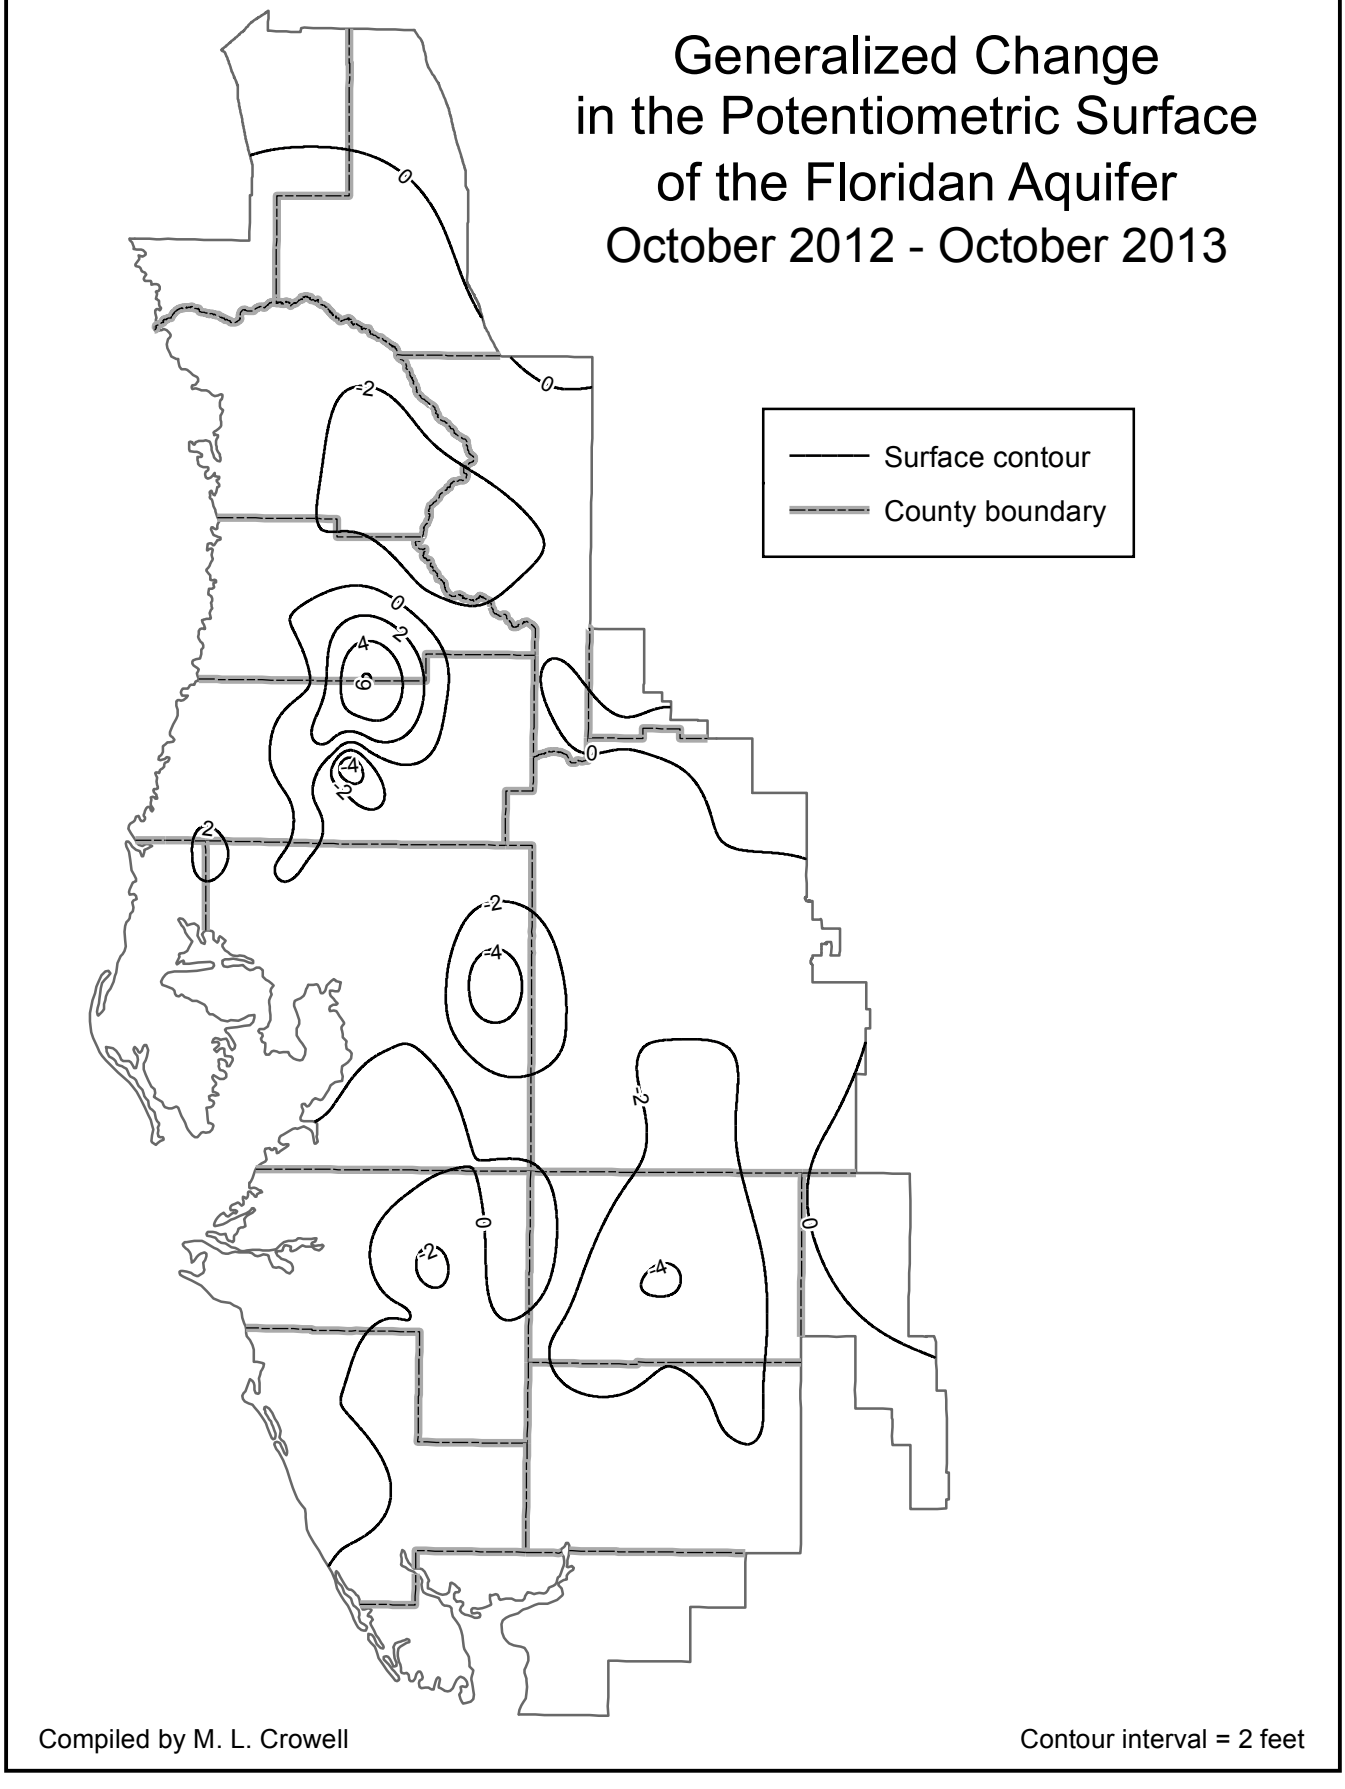
Generalized Change
in the Potentiometric Surface
of the Floridan Aquifer
October 2012 - October 2013
Surface contour
County boundary
0
-2
0
-2
-4
-6
-4
-2
0
-2
-2
-4
-2
0
-2
-4
0
Compiled by M. L. Crowell
Contour interval = 2 feet

Public Supply Wellfields

Water levels are measured in 21 monitor wells (9 surficial, 12 intermediate and Floridan aquifer wells) located at nine public supply wellfields in the District. Thirteen of the 21 monitor wells have water levels measured monthly, two biweekly, and six weekly. Monthly data are tabulated to compare recent water levels to historical means.

During October, average water levels decreased in seven of the twelve intermediate and Floridan wells and six of the nine surficial wells. Data was unavailable for the Morris Bridge 3A Deep and Shallow wells. Average water levels measured in the intermediate and Floridan wells decreased 1.12 feet, while levels measured in surficial wells decreased 0.52 foot.

In October, average water levels in six of the 12 intermediate and Floridan wells and five of the nine surficial wells were above last year's levels. Data was unavailable for the Morris Bridge 3A Deep and Shallow wells. Water levels measured in the intermediate and Floridan wells averaged 0.15 foot above last year's levels, while surficial water levels averaged 0.05 foot above October 2012 levels.

For October, average water levels in eleven of the 12 intermediate and Floridan wells and eight of the nine surficial wells were above the low normal level, compared to historical monthly levels. Data was unavailable for the Morris Bridge 3A Deep and Shallow wells. Water levels measured in the intermediate and Floridan wells averaged 10.09 feet above the low normal level, while levels in the surficial wells averaged 6.67 feet above the low normal level.

SUMMARY OF GROUNDWATER LEVELS IN REPRESENTATIVE WELLFIELD WELLS, OCTOBER 2013

INT/FLORIDAN WELLS	*OCT 2013 Elev*	*SEP 2013 Elev*	*OCT 2012 Elev*	*Change From SEP 2013*	*Change From OCT 2012*	*OCT Historical Low Normal*	*OCT Historical High Normal*	*Departure From Low Normal*	*Period of Record Low*	*Record Low Date*	*Period of Record High*	*Record High Date*
Cosme-Odessa Cosme No. 3	32.56	32.81	32.18	-0.25	0.38	23.39	27.66	9.17	11.58	JUN2000	33.84	AUG2012
Cross Bar WRW	50.23	49.30	49.61	0.93	0.62	41.58	54.66	8.65	33.93	DEC1993	61.65	AUG1984
Cypress Crk TMR-1 Deep	64.07	65.75	65.24	-1.68	-1.17	54.40	61.82	9.67	36.93	FEB2001	70.87	JUN1976
Cypress Crk TMR-3 Deep	59.62	61.81	62.46	-2.19	-2.84	52.60	57.97	7.02	34.22	FEB2001	68.74	JUL1976
Eldridge-Wilde 11 Deep	26.07	27.19	22.46	-1.12	3.61	11.80	17.84	14.27	0.31	SEP1990	64.70	NOV2009
Eldridge-Wilde 2S	24.56	24.23	22.06	0.32	2.50	10.00	18.17	14.56	-1.05	JUN2000	25.44	SEP2013
Morris Bridge 3A Deep	.	34.66	32.34	.	.	29.26	32.58	.	17.91	MAY2009	42.53	AUG2013
Section 21 Hills 13 Deep	47.90	48.01	47.76	-0.11	0.14	36.22	45.93	11.68	21.54	JUN2002	52.08	JUL1944
South Pasco 42	56.68	55.77	56.95	0.91	-0.27	42.59	49.23	14.09	27.98	MAY2002	58.40	AUG2012
South Pasco SR 54 Deep	57.60	56.86	57.90	0.74	-0.30	46.33	55.08	11.27	33.49	MAY2002	59.26	AUG2012
Starkey Regional	36.38	36.53	36.37	-0.15	0.01	32.15	34.90	4.23	25.03	JUN2000	37.72	JUL2012
Verna 08	14.02	23.70	15.09	-9.68	-1.07	7.65	15.86	6.37	-24.32	MAY1989	26.68	FEB1998
SURFICIAL WELLS												
Cosme-Odessa IC-6	38.83	39.42	38.35	-0.58	0.49	36.86	38.40	1.97	31.91	JUL1973	42.79	JUL2012
Cross Bar SERW	67.60	67.40	66.51	0.20	1.09	60.29	68.57	7.31	53.08	JUL1994	72.53	JUL1984
Cypress Crk TMR-1 Shallow	65.07	66.35	65.90	-1.28	-0.83	54.88	62.90	10.19	46.16	MAY2009	69.53	JUL1976
Cypress Crk TMR-3 Shallow	60.54	60.87	61.97	-0.33	-1.43	53.75	60.21	6.79	53.55	MAY1997	64.80	JUN2003
Eldridge-Wilde 11 Shallow	28.07	28.92	27.42	-0.85	0.65	17.48	23.31	10.59	10.28	MAY1991	29.34	SEP2004
Morris Bridge 3A Shallow	.	37.12	34.73	.	.	32.39	34.52	.	24.02	MAY2009	39.20	DEC1997
Section 21 Hills 13 Shallow	52.17	53.40	52.06	-1.23	0.11	41.29	50.57	10.88	33.81	MAY2001	53.82	AUG2012
South Pasco SR 54 Shallow	59.03	59.03	59.10	0.00	-0.07	57.45	58.83	1.58	54.43	OCT1980	60.49	SEP1998
Starkey 707	31.64	31.71	31.28	-0.07	0.36	27.62	30.65	4.02	22.70	JUN2000	33.85	MAR1998

Aquifer Resource Index

The Aquifer Resource Index (ARI) was created to provide information to the media, residents, local governments and other interested parties about current ground-water conditions and how they compare to historical records. The underlying purpose of this index is to provide the public with a gauge of ground-water levels in their area, so they can develop an understanding of the severity and cycles of drought and recovery.

The ARI is derived by comparing current ground-water levels with historical levels for 51 intermediate and Floridan aquifer (deep) monitor wells located throughout the three geographic areas of the District. Monitor wells with an adequate and reliable period-of-record to calculate weekly percentiles were selected for the network.

To determine the ARI value for a geographic area, each well is compared to its respective low-normal value weekly, and the difference is calculated. The weekly differences are used to determine the regional ARI value and the resulting ARI value represents how far water levels in the aquifer have to rise or fall to reach their respective low-normal value. The normal range for the northern region is approximately zero to three feet, zero to five-and-one-half feet for the central region and zero to eight feet for the southern region.

Weekly Aquifer Resource Index Level, In Feet
(Relative to Bottom of the Normal Range or 25th Percentile)

Report Date	Northern Counties	Central Counties	Southern Counties
10/07/2013	2.39	4.71	3.97
10/14/2013	2.33	4.76	4.33
10/21/2013	2.41	4.61	3.75
10/28/2013	1.93	4.23	3.00

Note: A negative value indicates the regional average is below the “Low-Normal” level

AQUIFER RESOURCE INDEX*
October 2013

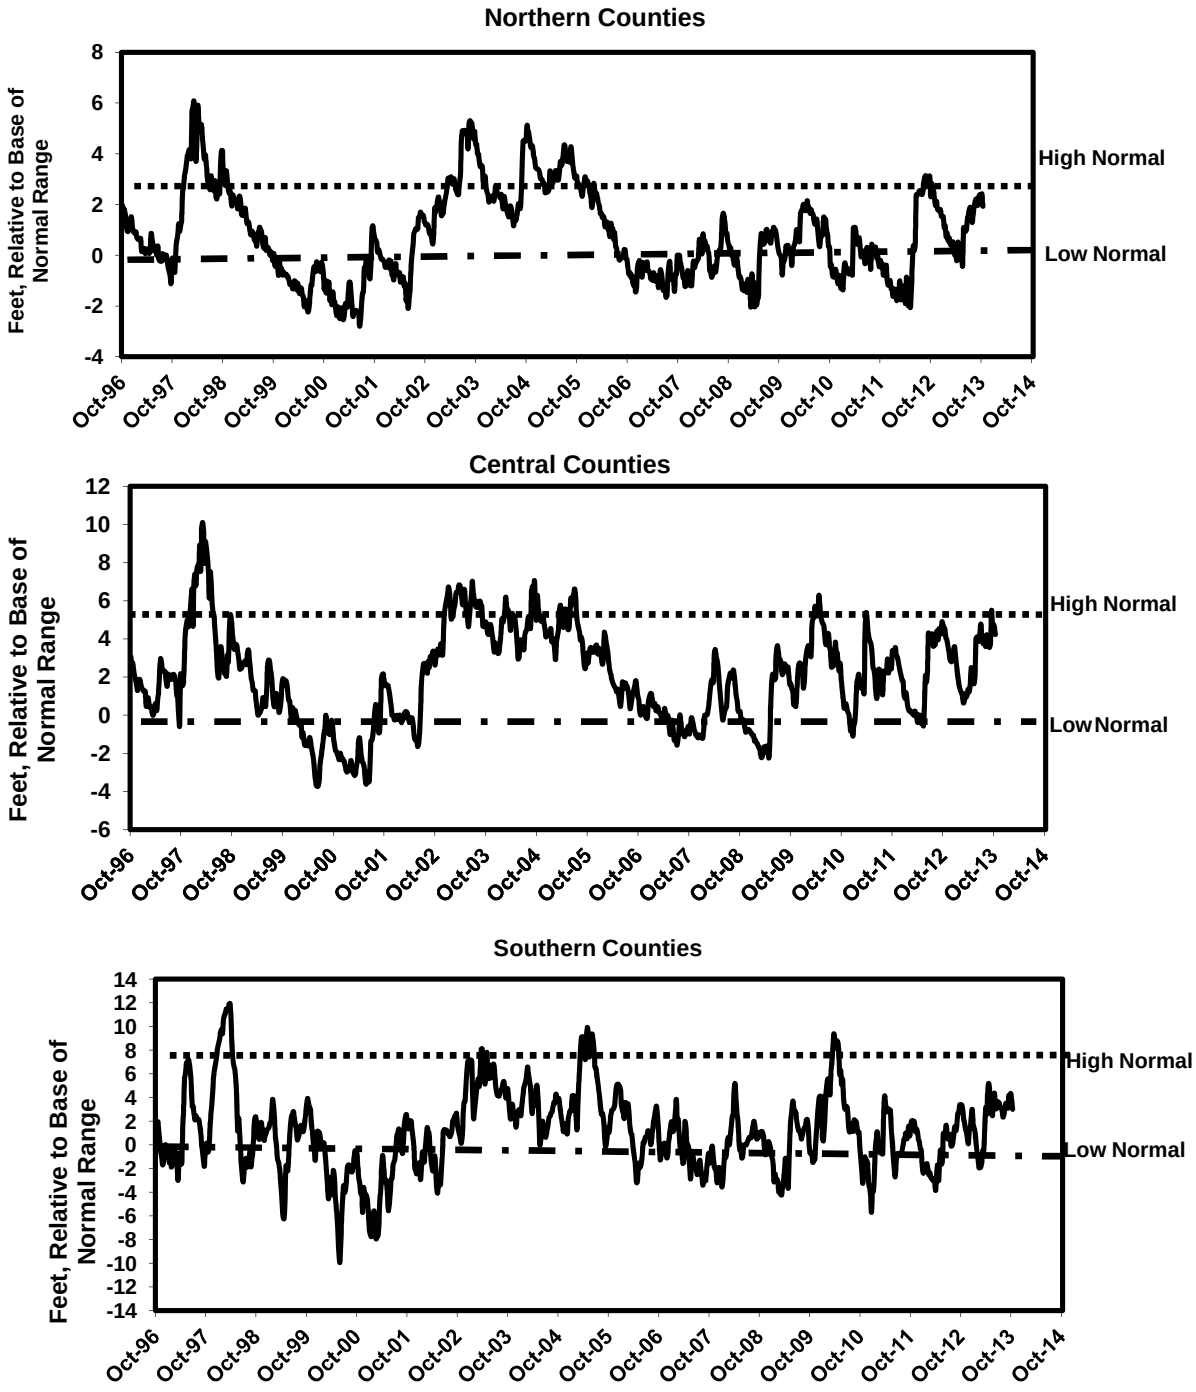

*Average Groundwater Level Relative to Low Normal

Compiled By Pam Green

PUBLIC SUPPLY SURFACE WATER RESERVOIRS

CITY OF TAMPA RESERVOIR (Hillsborough River Basin): Constructed in 1924, it is located on the Hillsborough River in Hillsborough County. It is the fourth largest public supply surface water facility in the District. It is the main water supply for the City of Tampa and has a total storage capacity of 1.7 billion gallons (bg). The total usable volume is 1.4 bg, when the reservoir elevation is 22.5 feet NGVD. It is an in-stream reservoir with a depth that ranges between nine and 22 feet. Given this amount of water, it is estimated that a 15-day supply of water is available from this facility over an extended dry period. During periods of low water due to drought conditions, the facility is permitted to pump water from two alternate sources. The first of these two sources is the Tampa Bypass Canal. Water is pumped over the water control structure at S-161 into the Hillsborough River above the dam. The second source is Sulphur Springs, just downstream from the dam, where water is captured at the spring and pumped back behind the dam. Withdrawals from both sources are in strict accordance with pumpage schedules as outlined in the facility's water use permit. When water levels fall below 12 feet NGVD, water cannot be withdrawn because the reservoir level is below the intake pipes. The permitted average daily withdrawal for this facility is 82 mgd, with a permitted maximum daily withdrawal of 104 mgd. Currently, ground water wells are not used to augment this facility. The minimum producible level is 9.00 feet.

PEACE RIVER RESERVOIRS - PEACE RIVER/MANASOTA REGIONAL WATER SUPPLY AUTHORITY (Peace River Basin): The Peace River reservoirs are located in southwestern DeSoto County. They are an off-stream reservoir system consisting of two reservoirs that store surface water captured from the Peace River during wet periods. The first reservoir, Reservoir 1, was built in 1980 and encompasses approximately 85 acres, has a water depth of approximately 31 feet, and has a total storage capacity of approximately 625 million gallons. The second reservoir, Reservoir 2, was built in 2009, covers about 616 acres, has a water depth of approximately 35 feet, and has a total storage capacity of about 6.0 billion gallons. The PRMRWSA facility ranks as the third largest in the District for total volume storage and supplies water to Charlotte, DeSoto, Manatee and Sarasota counties and to the City of North Port. The facility also uses an aquifer storage recovery (ASR) system for storing treated water pumped from the river. The minimum producible level at Reservoir 1 is Elevation 8.0 feet, while Reservoir 2 is Elevation 27.0 feet.

MANATEE RESERVOIR (Manasota Basin): Completed in 1967 by the damming of the Manatee River, the Manatee Reservoir is the second largest of the six surface-water public supply facilities within the District. Located in Manatee County, this in-stream facility has a storage capacity of 7.5 bg. The service area of the Manatee reservoir is the unincorporated portions of Manatee County, the City of Palmetto and Anna Maria Island, and also the Sarasota SUD#1. This reservoir provides essentially all public supply for Manatee County, with the exception of the City of Bradenton. The total size of this reservoir is 1800 acres with an average depth of 15 feet. With the reservoir full, the facility has approximately 220 days of available water supply. When the surface-water elevation drops below 21.0 feet, water cannot be withdrawn because levels are below the facility's intakes. The permitted average daily withdrawal for this facility is 34.9 mgd, with a permitted peak monthly quantity of 41.9 mgd. The minimum producible level is 21.00 feet.

EVERS RESERVOIR (Manasota Basin): Constructed in 1935 and expanded in 1985, it is located on the Braden River in Manatee County. This is the fifth largest public supply reservoir in the District. Its main service area is the City of Bradenton and approximately 500 customers outside the city. It has a total storage capacity of 1.5 bg. The total size of the facility is 300 acres with an average depth of 12 feet. Water ceases to flow over the dam when the level falls below 3.84 feet NGVD. During the 1985 drought, while expansion of the facility was taking place, the water level dropped to one foot below sea level and demand was still met. Given a completely full reservoir, with no water going over the spillway, it is estimated the facility could supply water for approximately 260 days, with no input from rainfall. The permitted average daily withdrawal for this facility is 6.95 mgd, with a permitted peak monthly quantity of 8.13 mgd. Currently, ground-water wells are not used to augment this facility.

SHELL CREEK RESERVOIR (Peace River Basin): Shell Creek Reservoir, located in Charlotte County, is the sixth largest surface water system within the District. This system was built in 1964 and services the City of Punta Gorda as well as unincorporated areas surrounding the city limits. The Shell Creek Reservoir is fed by two primary tributaries, Shell Creek from the east and Prairie Creek from the northwest. The total drainage area at Hendrickson Dam is 373 square miles. It has a surface area of 800 acres and depths of 10 to 12 feet. Total storage capacity is 765 mg. Even with this low volume of water, personnel at this facility estimate they have approximately 125 days of available supply with no input from rainfall. Water ceases to flow across the weir when surface elevations drop below 5.0 feet NGVD, and at 3.7 feet NGVD water quality becomes a major concern. When surface elevations drop below 1.75 feet NGVD, the water is below the intakes and withdrawal of water is not possible. The permitted average daily withdrawal by this facility is 5.358 mgd, with a permitted peak monthly quantity of 6.901 mgd. The minimum producible level is 1.70 feet.

C.W. BILL YOUNG REGIONAL RESERVOIR - TAMPA BAY WATER (Alafia River Basin): Constructed in early 2005, it is the largest public supply surface water facility in the District. Located in southern Hillsborough County, it is an off-stream reservoir that stores surface water skimmed from the Tampa Bypass Canal and Alafia and Hillsborough Rivers. It services the Tampa Bay region through the Tampa Bay Water regional public supply water distribution system. The reservoir has an estimated storage capacity of 15.0 bg when the water level elevation is 136.5 feet NGVD. The reservoir is approximately 45 feet deep, two miles long and one mile wide, and encompasses a land area of approximately 1,100 acres. It reportedly has the capacity to provide 25 percent of the Tampa Bay region's public supply needs for six months and can supply the Tampa Bay regional surface water treatment plant at full capacity for 227 days.

Reservoirs

Water-level data for the seven reservoirs are obtained weekly from the USGS, Manatee County Utilities Department, Peace River/Manasota Regional Water Supply Authority, or Tampa Bay Water. The last weekly water-level value of the month is indicated in this report. The values reported are provisional and subject to revision.

In October, four of the seven reservoirs monitored for this report recorded water-level decreases, compared to last month. The Evers, Bill Young, Peace River No. 1 and Shell Creek reservoirs posted average water level decreases of 0.26 foot, 7.91 feet, 1.20 feet and 0.81 foot, respectively. The Hillsborough River, Lake Manatee and Peace River No. 2 reservoirs reported water level increases of 0.23, 0.22 and 0.60 foot, respectively.

SUMMARY OF WATER LEVELS IN WATER SUPPLY RESERVOIRS (ELEVATION IN FEET, NGVD)

RESERVOIR	2013 Sep	2013 Oct	2012 Oct	Change from Prior Month	Change from Prior Year
Evers					
City of Bradenton	**4.15**	**3.89**	**3.79**	**-0.26**	**0.10**
Hillsborough					
City of Tampa	**22.43**	**22.66**	**22.58**	**0.23**	**0.08**
Lake Manatee					
Manatee County	**39.78**	**40**	**40.08**	**0.22**	**-0.08**
C.W. Bill Young Regional					
Tampa Bay Water	**74.42**	**66.51**	**92.84**	**-7.91**	**-26.33**
Peace River					
PRMRWSA Reservoir #1	**25.6**	**24.4**	**25**	**-1.20**	**-0.60**
PRMRWSA Reservoir #2	**61.5**	**62.1**	**62.0**	**0.60**	**0.10**
Shell Creek					
City of Punta Gorda	**5.98**	**5.17**	**5.4**	**-0.81**	**-0.23**

NGVD - National Geodetic Vertical Datum

Reported data are provisional and subject to revision.

Compiled by Pam Green

EVERS RESERVOIR
City of Bradenton

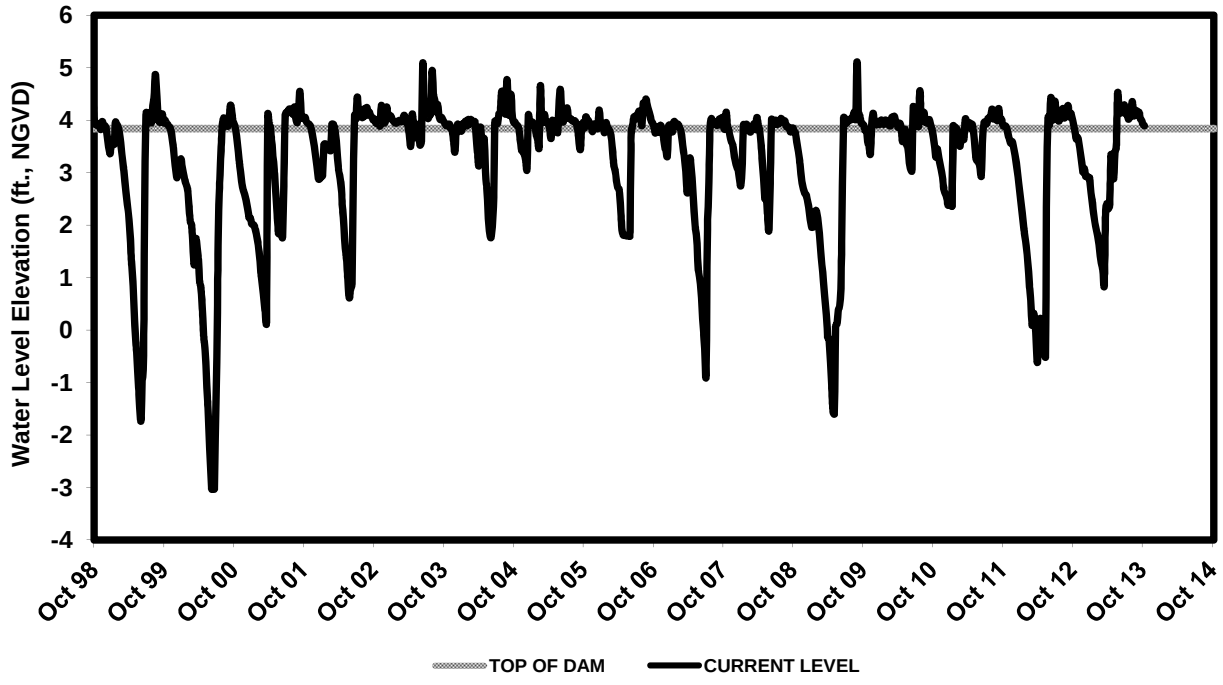

HILLSBOROUGH RESERVOIR
City of Tampa

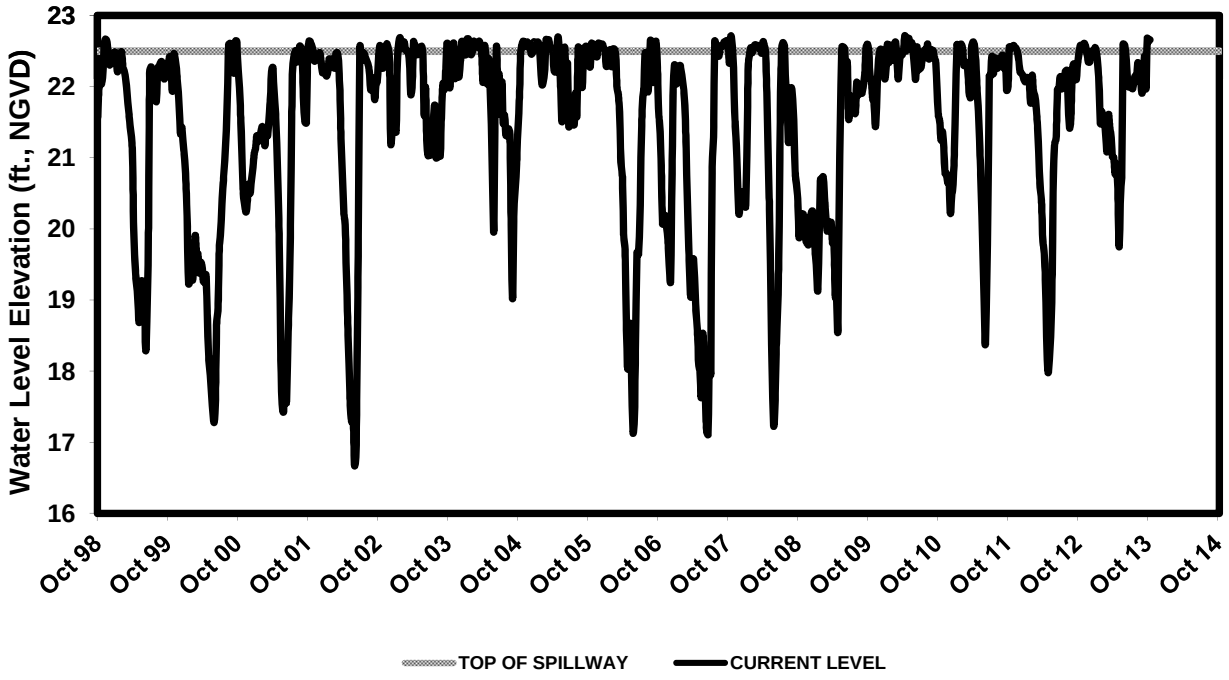

Compiled by Pam Green

SHELL CREEK RESERVOIR
City of Punta Gorda

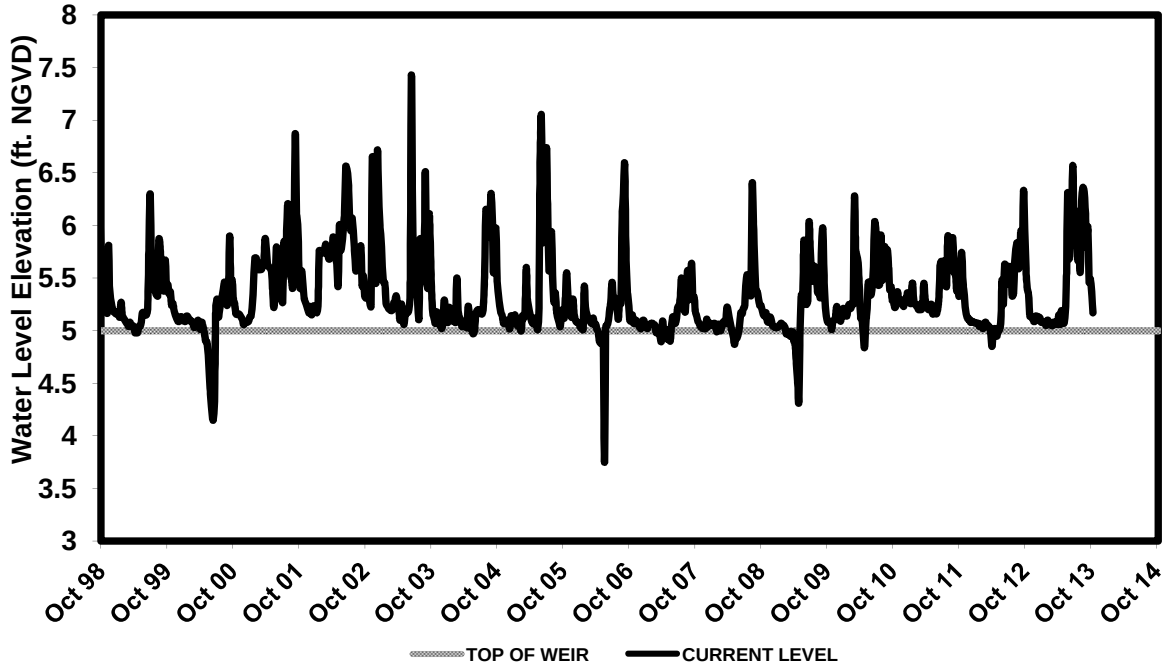

C.W. BILL YOUNG REGIONAL RESERVOIR
Tampa Bay Water

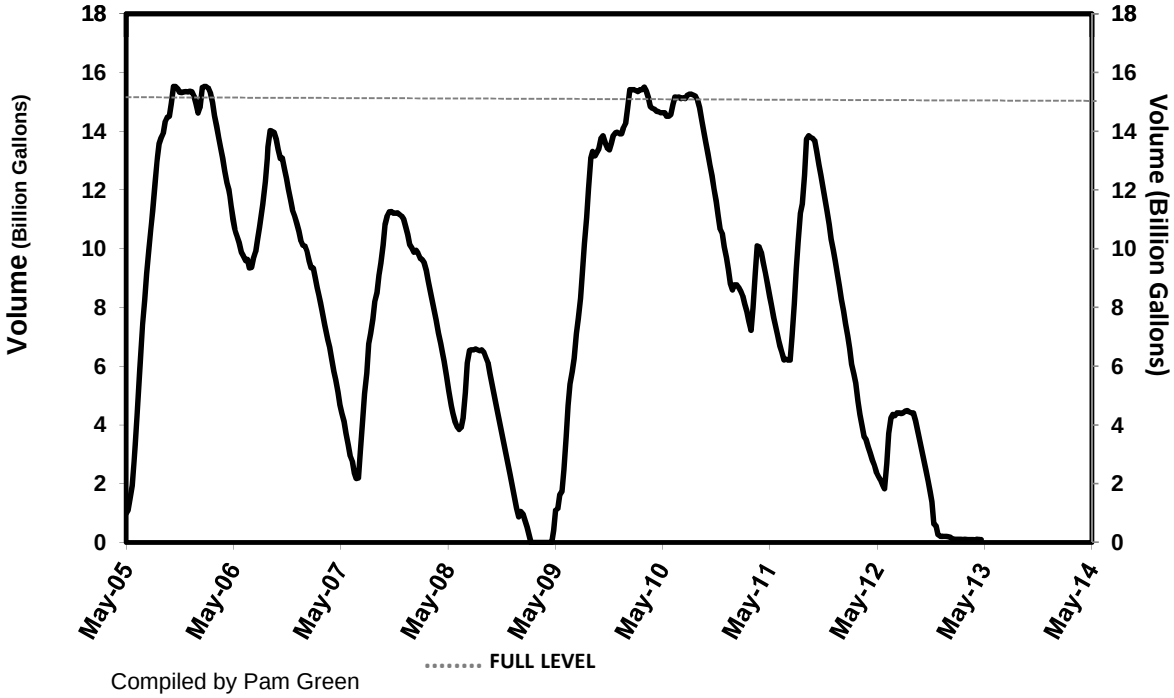

Compiled by Pam Green

LAKE MANATEE RESERVOIR
Manatee County

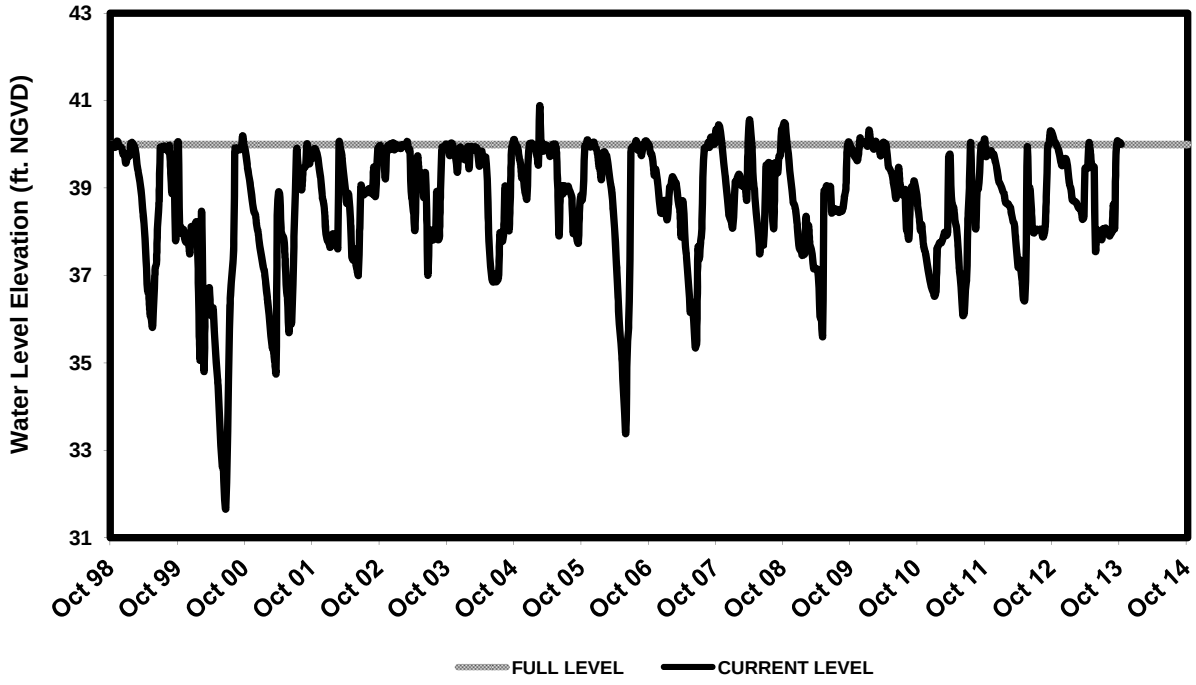

PEACE RIVER RESERVOIR No. 1
Peace/Manasota Reg. Water Supply

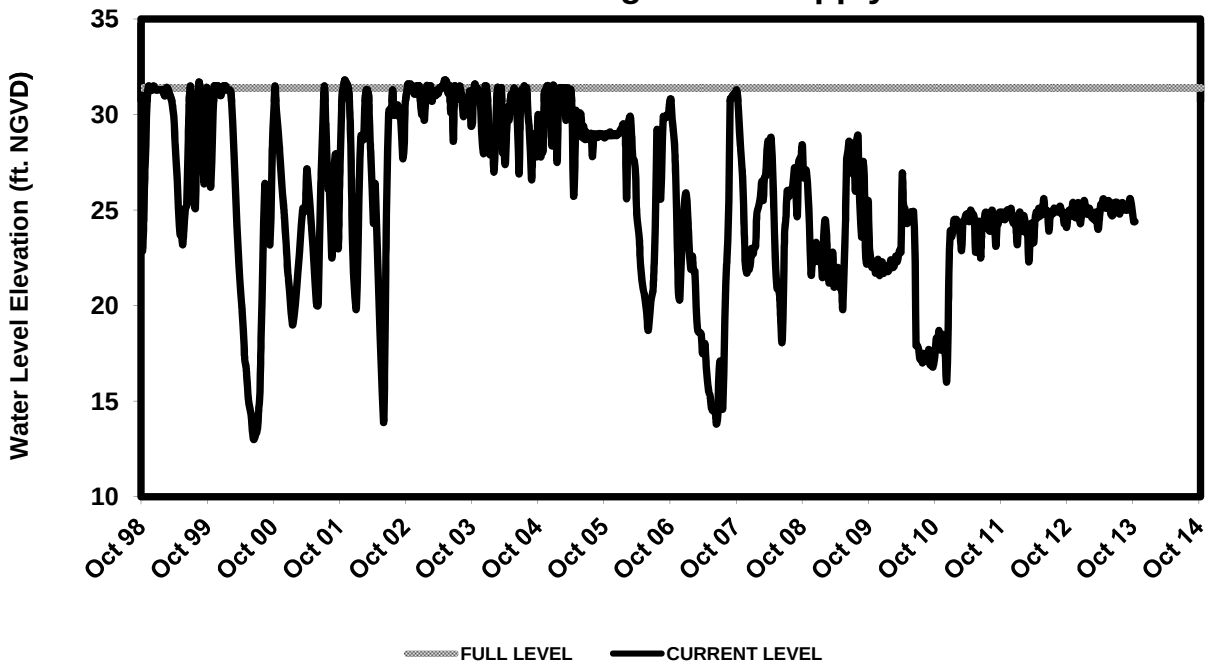

Compiled by Pam Green

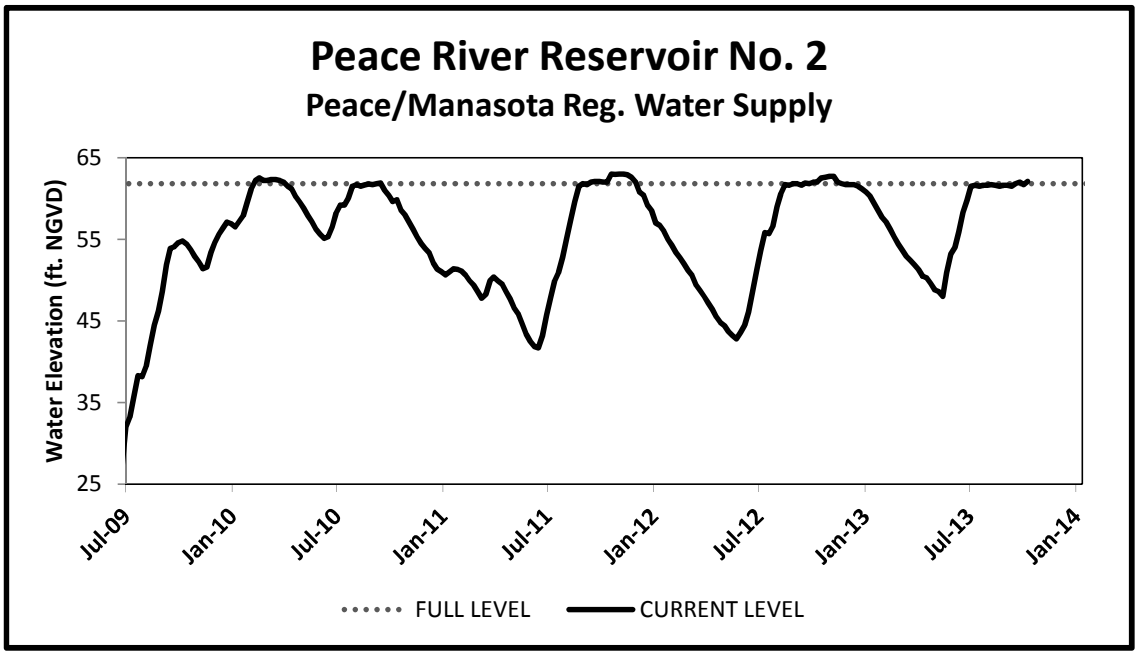

Compiled by Pam Green

APPENDICES

Rainfall percentiles by interval and region, inches.

Rainfall Interval	Region	10TH Percentile (P10)	25th Percentile (P25)	50th Percentile (P50)	75th Percentile (P75)	90th Percentile (P90)
Annual total	*Northern*	43.19	48.35	54.01	58.86	63.46
Annual total	*Central*	41.45	46.10	52.16	57.28	63.82
Annual total	*Southern*	42.05	46.25	52.19	57.82	63.43
Annual total	*District*	43.12	47.22	52.99	57.46	62.83
Dry season total	*Northern*	15.27	18.42	23.79	28.72	32.10
Dry season total	*Central*	13.32	16.48	21.59	26.86	30.83
Dry season total	*Southern*	12.35	15.68	21.24	26.23	30.01
Dry season total	*District*	13.71	16.79	22.02	27.22	29.70
Wet season total	*Northern*	22.79	25.44	29.45	33.43	38.16
Wet season total	*Central*	23.22	25.79	29.71	34.86	39.22
Wet season total	*Southern*	24.37	27.37	30.58	35.88	41.68
Wet season total	*District*	23.92	27.16	29.97	34.71	38.93
January total	*Northern*	0.73	1.50	2.45	4.00	5.30
January total	*Central*	0.72	1.21	2.23	3.72	4.60
January total	*Southern*	0.39	0.93	1.88	3.31	4.93
January total	*District*	0.65	1.17	2.10	3.55	4.90
February total	*Northern*	0.82	1.42	2.82	4.08	5.76
February total	*Central*	0.60	1.12	2.38	4.17	5.50
February total	*Southern*	0.36	1.26	2.21	3.63	4.93
February total	*District*	0.73	1.32	2.38	3.94	5.12
March total	*Northern*	1.00	2.06	3.15	5.43	7.21
March total	*Central*	0.97	1.66	2.96	4.95	6.44
March total	*Southern*	0.81	1.28	2.56	4.29	6.68
March total	*District*	1.09	1.64	3.04	4.86	6.92
April total	*Northern*	0.65	1.33	2.38	3.95	5.52
April total	*Central*	0.51	0.96	1.87	3.44	5.59
April total	*Southern*	0.48	1.19	2.04	3.75	4.66
April total	*District*	0.65	1.20	2.24	3.72	5.12
May total	*Northern*	1.18	1.95	3.21	4.67	6.92
May total	*Central*	0.87	1.64	2.73	4.58	5.75
May total	*Southern*	1.17	1.91	3.36	5.22	6.75
May total	*District*	1.23	2.04	3.24	4.87	6.29
June total	*Northern*	4.60	5.47	7.27	8.63	10.16
June total	*Central*	3.65	4.79	6.46	8.27	9.48
June total	*Southern*	4.22	5.63	7.44	9.06	12.06
June total	*District*	4.55	5.46	7.24	8.60	10.99
July total	*Northern*	5.36	6.75	8.29	9.16	11.52
July total	*Central*	4.89	5.98	8.35	10.05	11.44
July total	*Southern*	5.68	6.94	8.11	9.50	10.99
July total	*District*	5.60	6.83	8.19	9.57	10.58
August total	*Northern*	5.44	6.30	7.31	9.72	11.33
August total	*Central*	5.52	6.55	7.90	9.62	12.03
August total	*Southern*	5.55	6.22	7.70	8.97	10.49
August total	*District*	5.65	6.52	7.70	9.37	10.67
September total	*Northern*	2.79	4.18	5.84	8.04	11.35
September total	*Central*	3.19	5.11	6.46	8.50	11.69
September total	*Southern*	4.30	5.46	6.94	9.33	11.85
September total	*District*	3.85	5.21	6.53	8.62	11.65
October total	*Northern*	0.63	1.27	2.46	4.40	6.15
October total	*Central*	0.69	1.39	2.61	4.03	6.13
October total	*Southern*	0.92	1.78	2.73	4.27	6.04
October total	*District*	1.06	1.57	2.80	4.15	5.79

Rainfall percentiles by interval and region, inches (continued).

Rainfall Interval	Region	10TH Percentile (P10)	25th Percentile (P25)	50th Percentile (P50)	75th Percentile (P75)	90th Percentile (P90)
November total	*Northern*	0.38	0.71	1.63	2.88	4.56
November total	*Central*	0.25	0.47	1.42	2.82	4.33
November total	*Southern*	0.40	0.64	1.46	2.56	3.82
November total	*District*	0.37	0.63	1.53	2.73	4.39
December total	*Northern*	0.54	1.06	2.06	3.71	5.19
December total	*Central*	0.48	0.84	1.89	3.03	4.87
December total	*Southern*	0.45	0.77	1.56	2.63	4.18
December total	*District*	0.54	0.89	1.86	2.92	4.34

Rainfall characterization ranges

Characterization	Range	Corresponding Rainfall Percent of Normal (approximate)
Very dry	Less than the P10 rainfall	Less than 80 percent of normal
Drier than normal	P10 to P24 rainfal	80 to 90 percent of normal
Normal	P25 to P75 rainfall	90 to 110 percent of normal
Wetter than normal	P76 to P90 rainfal	110 to 120 percent of normal
Very Wet	Greater than the P90 rainfall	Greater than 120 percent of normal

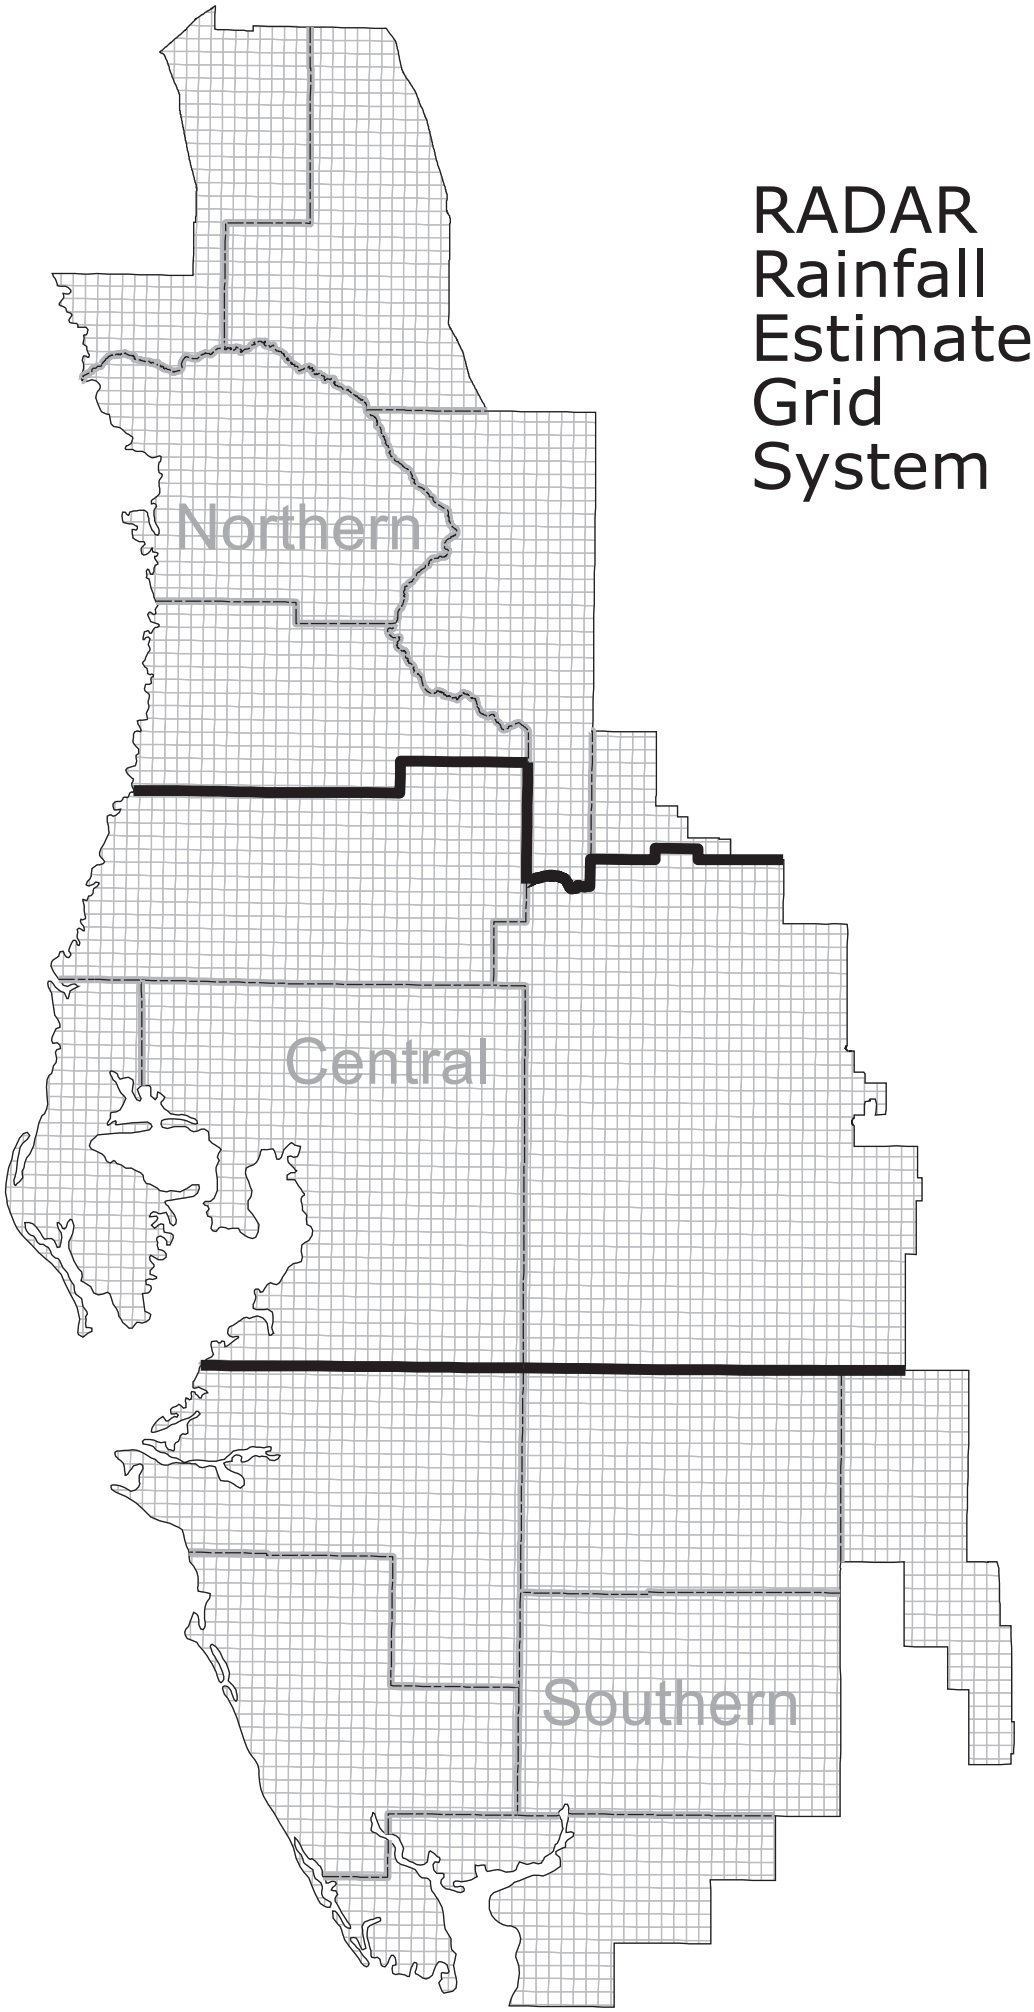
RADAR
Rainfall
Estimate
Grid
System
Northern
Central
Southern
N
W
E
S

02/2009

Selected Lake Monitoring Stations
Northern Region

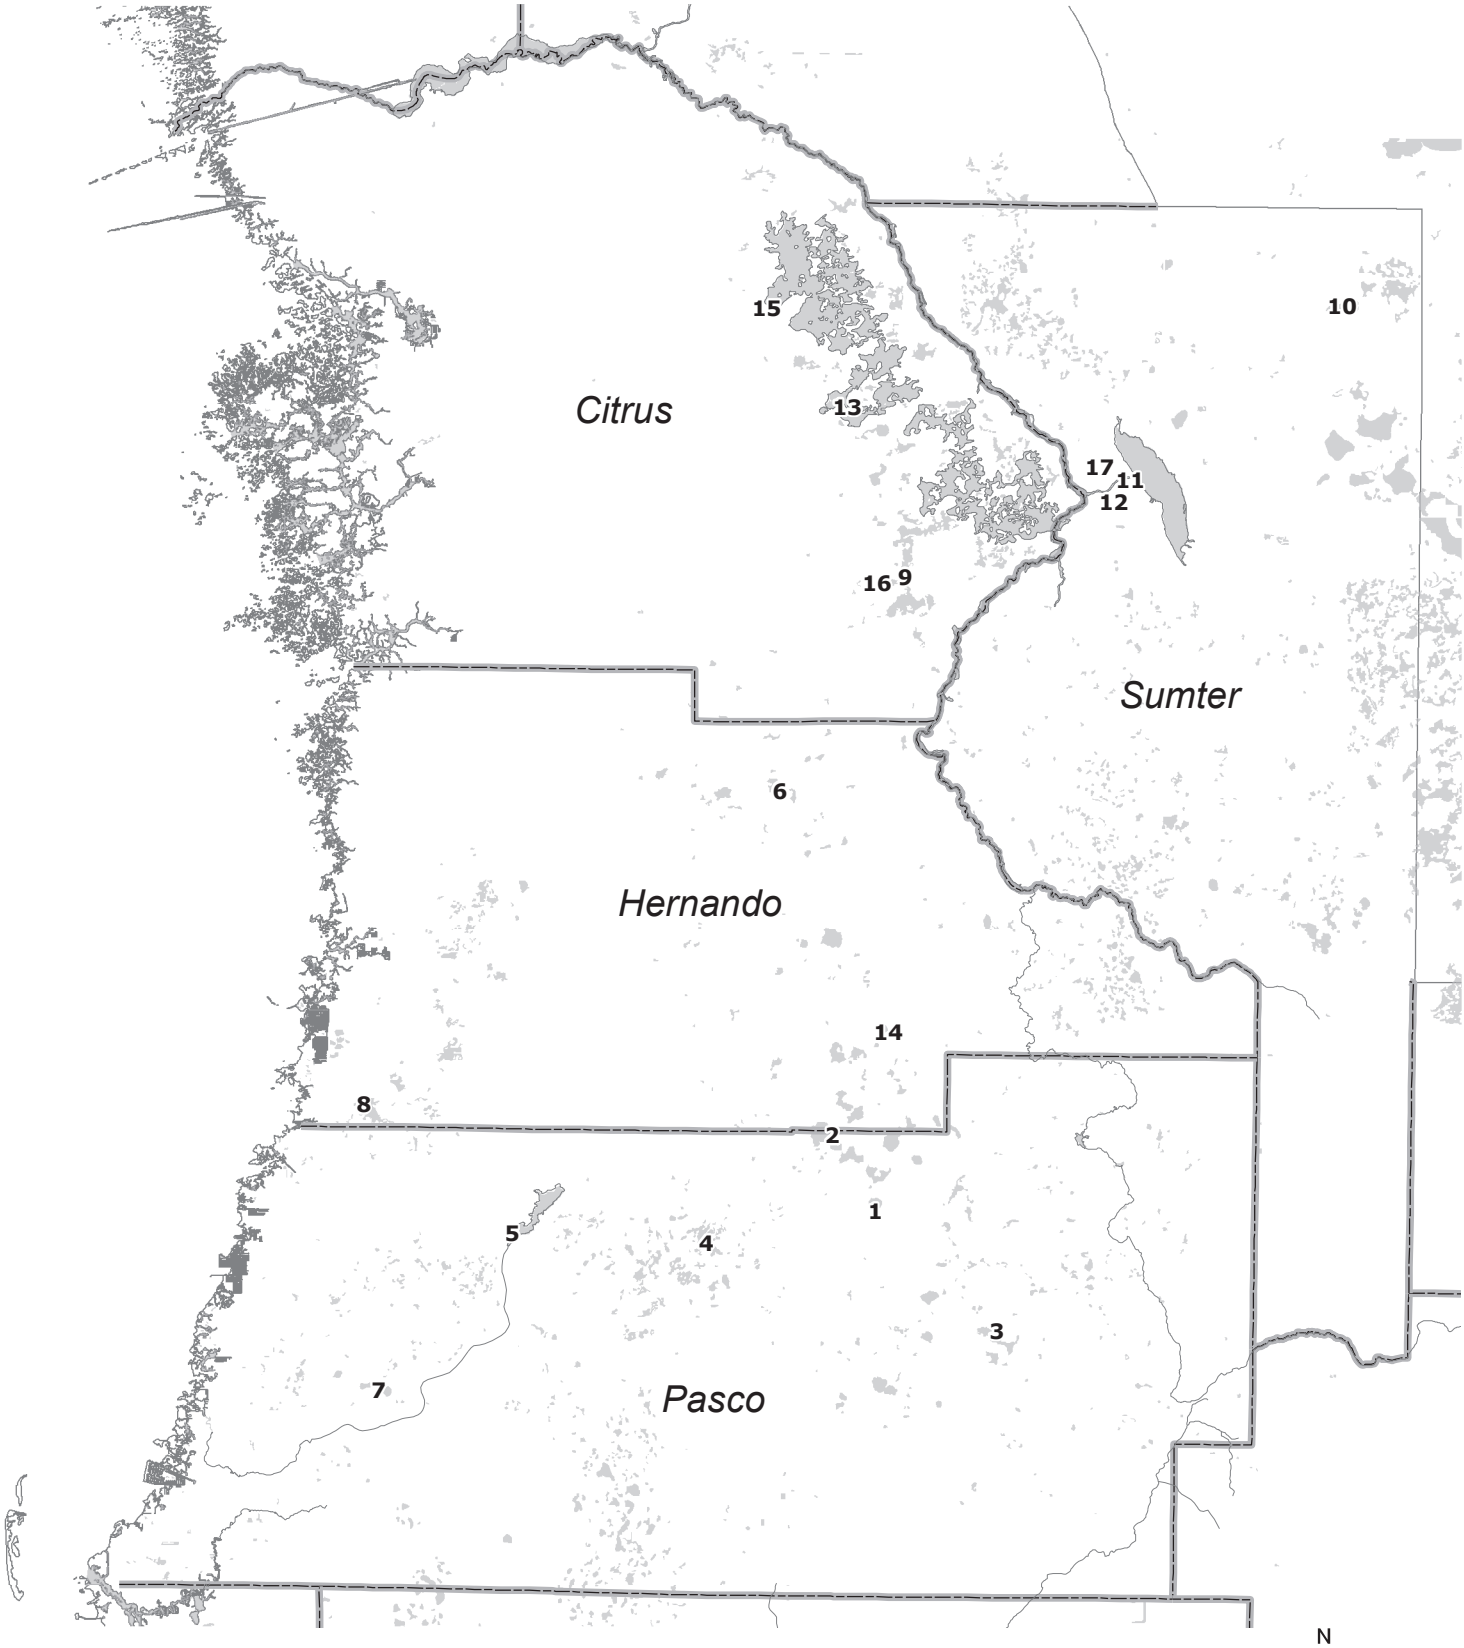

03/2009

Selected Lake Monitoring Stations
Tampa Bay Region

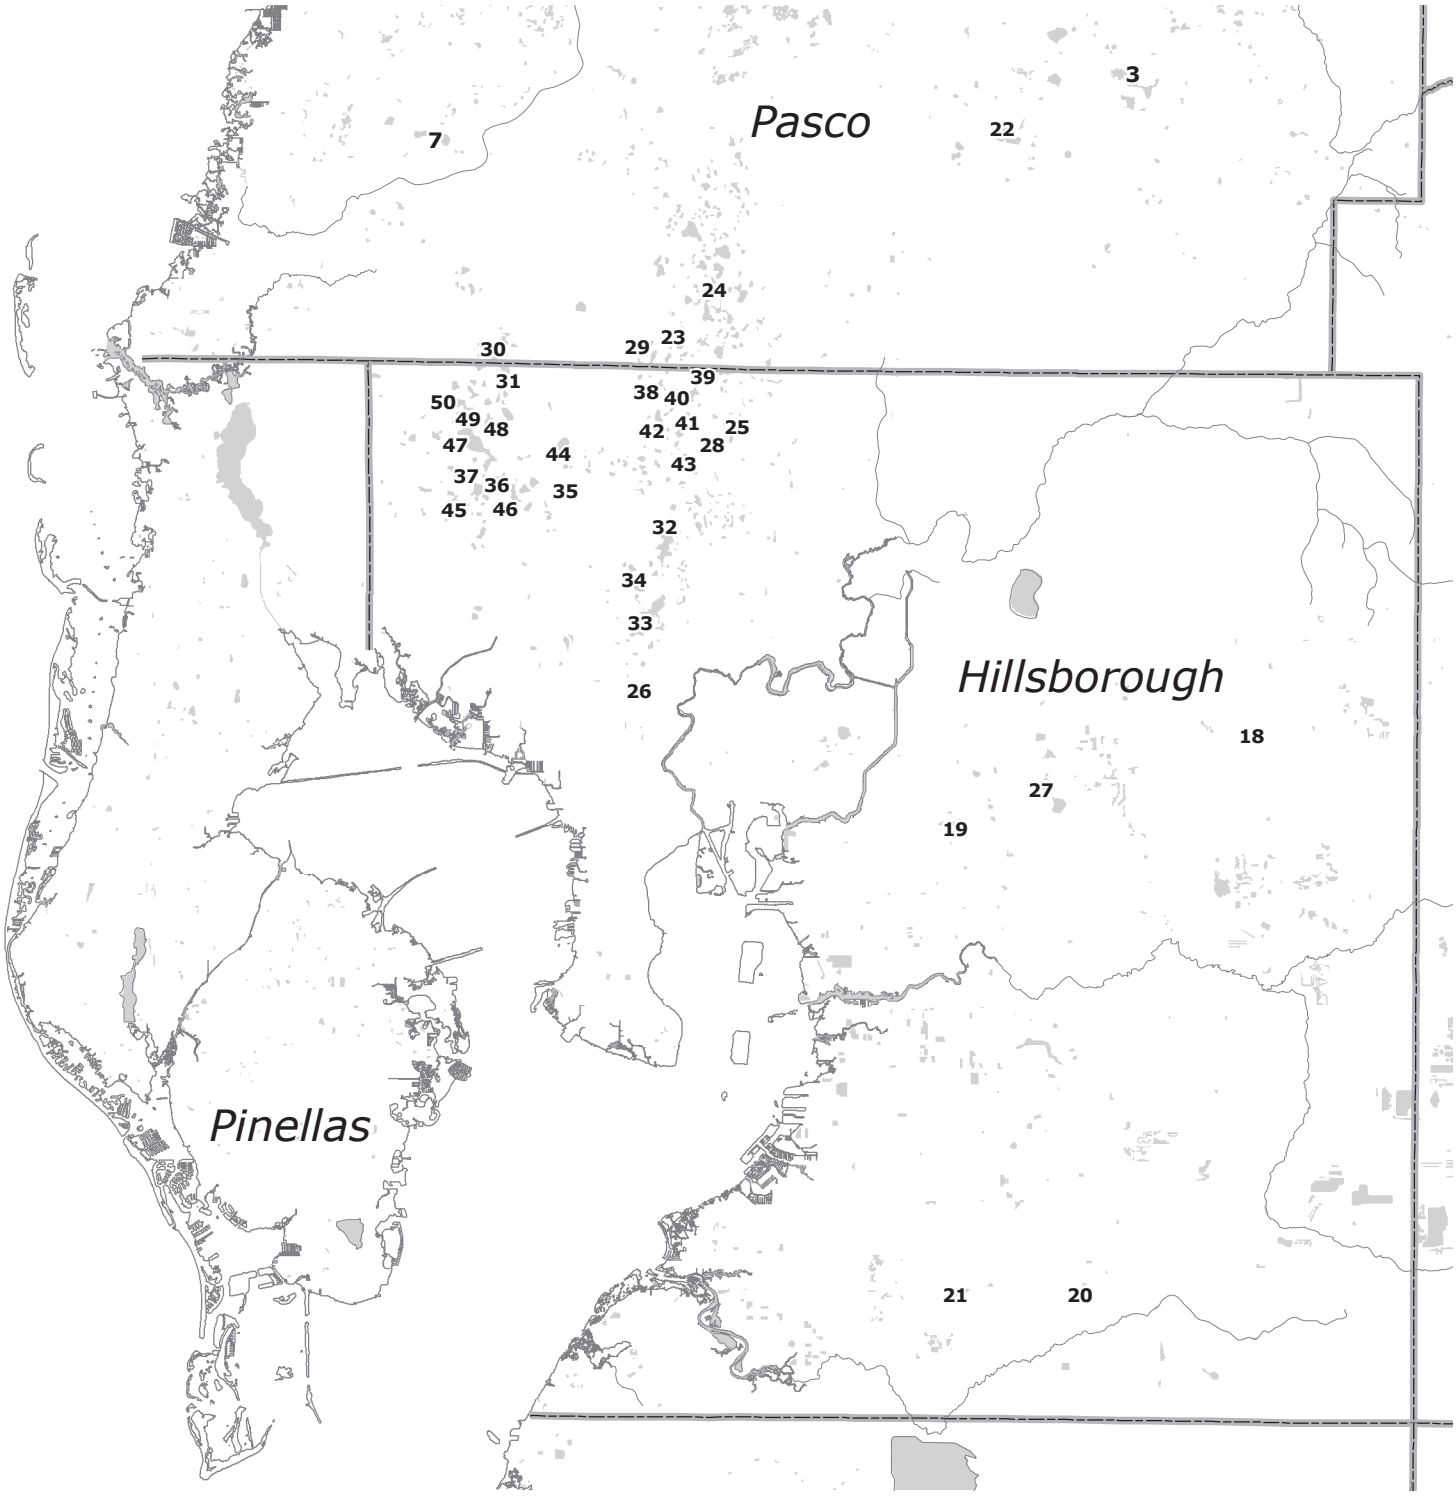

03/2009

Selected Lake Monitoring Stations
Polk Uplands Region

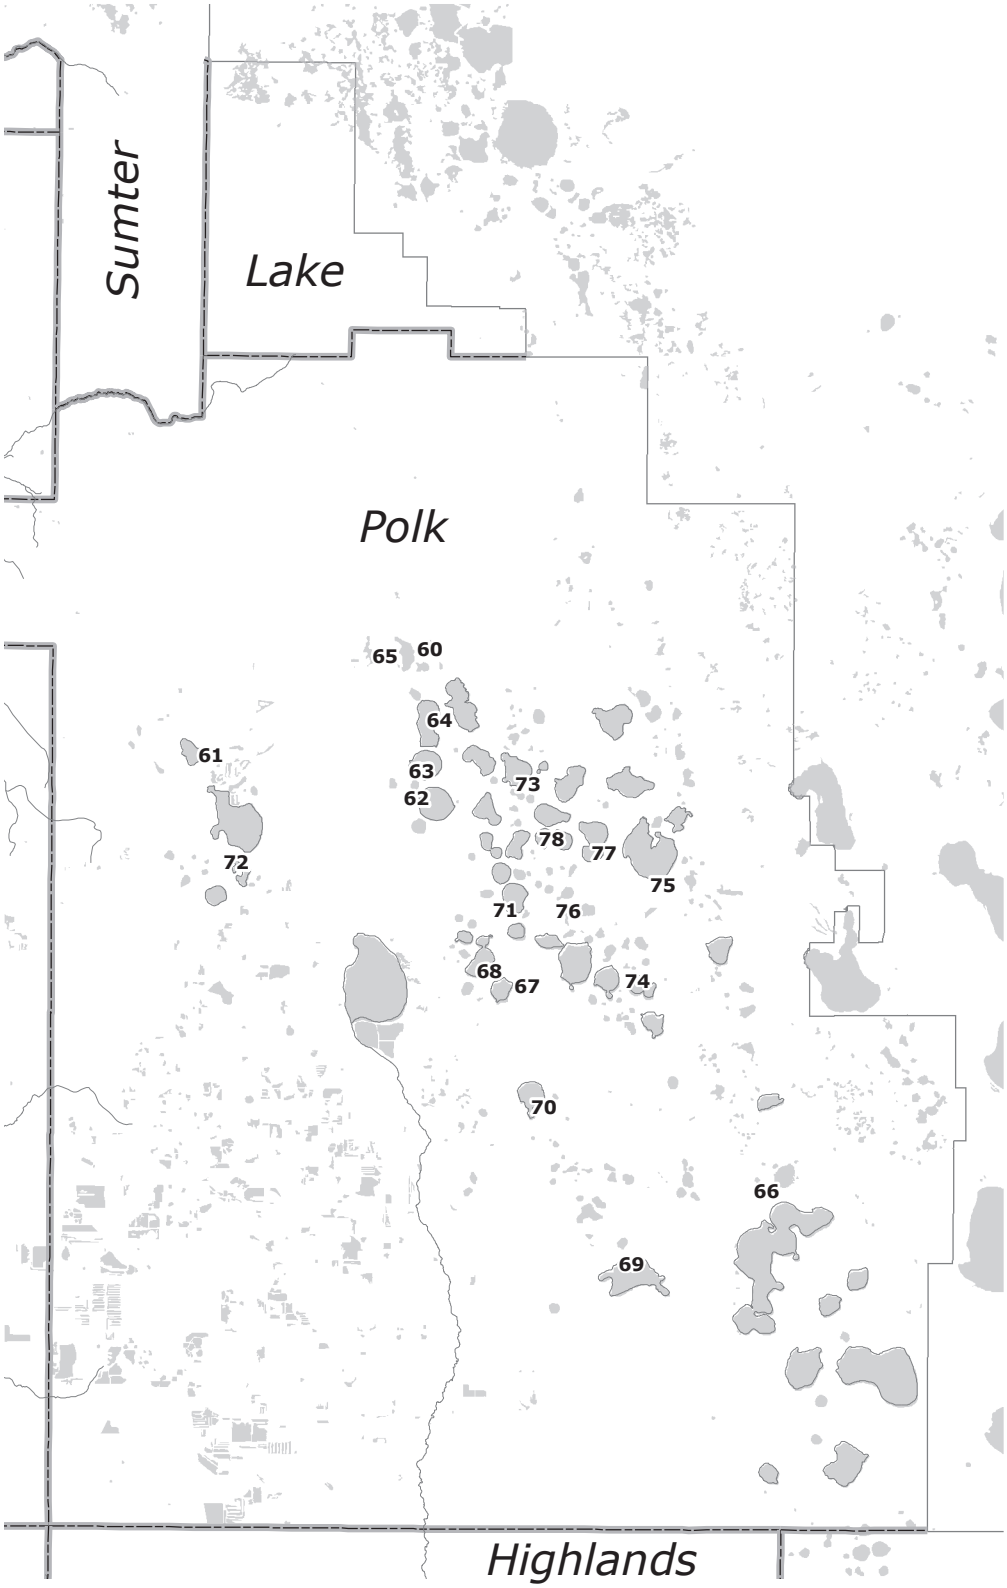

03/2009

Selected Lake Monitoring Stations
Lake Wales Ridge Region

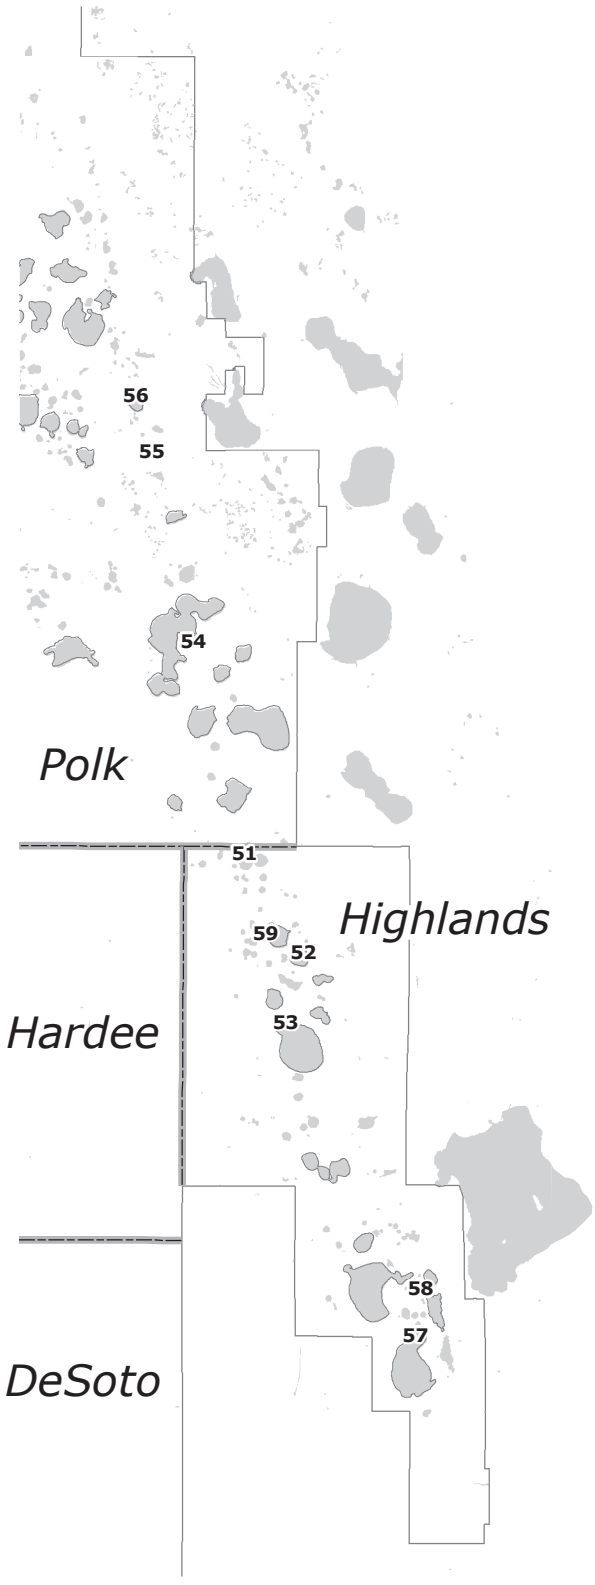



03/2009

Selected Lake Monitoring Stations

Northern Region

Map ID	Site Name
1	Lake Iola
2	Hancock Lake
3	Lake Pasadena
4	Big Fish Lake
5	Crews Lake
6	Lake Lindsey
7	Moon Lake
8	Hunters Lake
9	Tsala Apopka at Floral City
10	Lake Miona
11	Pana Vista Outlet River
12	Outlet River at Panacoochee
13	Tsala Apopka at Inverness
14	Spring Lake
15	Tsala Apopka at Hernando
16	Little Lake (Consuella)
17	Lake Panasoffkee

Tampa Bay Region

Map ID	Site Name
18	Mud (Walden) Lake
19	Gornto Lake
20	Carlton Lake
21	Lake Wimauma
22	King Lake near San Antonio
23	Lake Linda
24	Lake Padgett
25	Keene Lake
26	Egypt Lake
27	Long Pond
28	Lake Stemper
29	Camp Lake
30	Lake Ann (Parker)
31	Lake Hiawatha
32	Platt Lake
33	Lake Carroll
34	Bay Lake
35	Lake LeClare
36	Little Lake
37	Rainbow Lake
38	Lake Harvey
39	Deer Lake

Map ID	Site Name
40	Lake Brooker
41	Cooper Lake
42	Lake Thomas
43	Brant Lake
44	Turkey Ford Lake
45	Church Lake
46	Horse Lake
47	Lake Alice
48	Lake Calm
49	Keystone Lake
50	Crescent Lake

Selected Lake Monitoring Stations

Lake Wales Ridge Region

Map ID	Site Name
51	Trout Lake
52	Lake Letta
53	Lake Jackson at Sebring
54	Crooked Lake near Babson Park
55	Lake Starr
56	Lake Annie
57	Lake Placid
58	Lake Clay
59	Lake Lotela

Polk Uplands Region

Map ID	Site Name
60	Lake Helene
61	Lake Gibson
62	Lake Ariana
63	Lake Arietta
64	Lake Juliana
65	Clearwater Lake
66	Blue Lake South
67	Lake McLeod
68	Eagle Lake
69	Lake Buffum
70	Lake Garfield
71	Lake Howard
72	Lake Bonny
73	Lake Alfred
74	Lake Ruby
75	Lake Hamilton
76	Lake Otis
77	Lake Fannie
78	Lake Conine

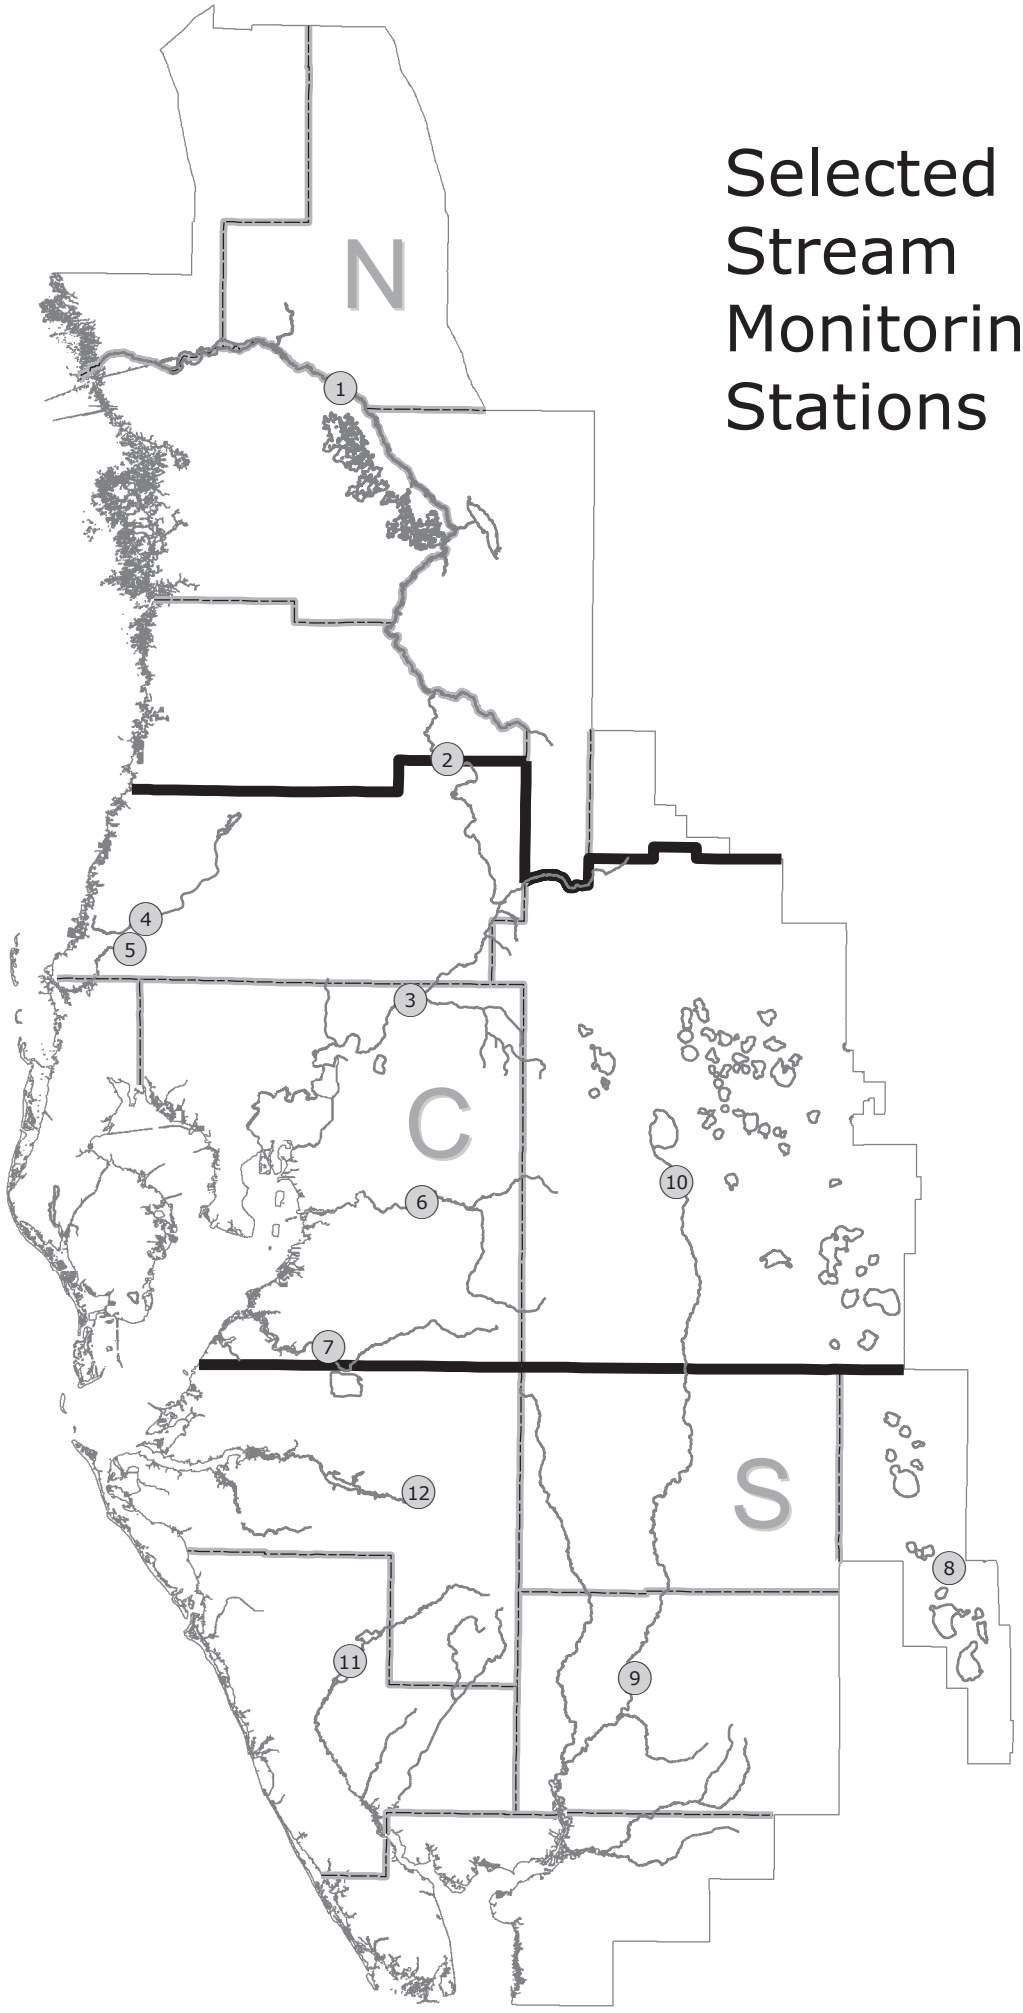
Selected
Stream
Monitoring
Stations
N
C
S
1
2
3
4
5
6
7
8
9
10
11
12
N
W
E
S

02/2009

Selected Stream Monitoring Stations

Map ID	Site Name
1	Withlacoochee River near Holder
2	Withlacoochee River at Trilby
3	Hillsborough River near Zephyrhills
4	Pithlachascotee River near New Port Richey
5	Anclote River near Elfers
6	Alafia River at Lithia
7	Little Manatee River near Wimauma
8	Josephine Creek near DeSoto City
9	Peace River at Arcadia
10	Peace River at Bartow
11	Myakka River near Sarasota
12	Manatee River near Myakka Head

STREAM MONITORING STATIONS

WITHLACOOCHEE RIVER (Northern Region)

Total length:	157 miles
Headwaters:	NW Polk and southern Sumter Counties
Elevation:	135 feet
Tributaries:	Little Withlacoochee, Big Gant Canal, Jumper Creek, Shady Brook, Outlet River of Lake Panasoffkee, Leslie Heifner Canal, Orange State Canal, Tsala Apopka Outfall Canal and Rainbow Springs.
Mouth:	Gulf of Mexico, Citrus County
Average fall:	0.9 feet/mile
Drainage area:	2000 square miles

Holder Station

County:	Marion
Period-of-record:	1928
Location:	38 miles upstream from mouth
Avg daily discharge:	1036.3 cfs
Runoff per year:	10.36 inches
Max of monthly avg discharge:	7096.3 cfs in 04/1960
Min of monthly avg discharge:	111.8 cfs in 07/1992
Drainage area:	1825 square miles

Trilby Station

County:	Hernando
Period-of-record:	1928
Location:	93 miles upstream from mouth
Avg daily discharge:	336.3 cfs
Runoff per year:	6.73 inches
Max of monthly avg discharge:	4254.7 cfs in 09/1933
Min of monthly avg discharge:	6.1 cfs in 07/1992
Drainage area:	570 square miles

ANCLOTE RIVER (Central Region)

Total length:	27.5 miles
Headwaters:	South-central Pasco County, west of Land O Lakes
Elevation:	65 feet
Tributaries:	South Branch and Hollin Creek
Mouth:	Gulf of Mexico, Pasco County
Average fall:	2.4 feet/mile
Drainage area:	113 square miles

Elfers Station

County:	Pasco
Period-of-record:	1946
Location:	16 miles upstream from mouth
Avg daily discharge:	65.1 cfs
Runoff per year:	12.20 inches
Max of monthly avg discharge:	633.8 cfs in 09/1988
Min of monthly avg discharge:	1.4 cfs in 05/1981
Drainage area:	72.5 square miles

HILLSBOROUGH RIVER (Central Region)

Total length:	55 miles
Headwaters:	Southeast Pasco County
Elevation:	77 feet
Tributaries:	Crystal Springs, Blackwater Creek, Flint Creek, Trout Creek, Cypress Creek, Curiosity Creek and Sulphur Springs
Mouth:	Hillsborough Bay
Average fall:	1.4 feet/mile
Drainage area:	690 square miles

Zephyrhills Station

County:	Hillsborough
Period-of-record:	1939
Location:	40 miles upstream from mouth
Avg daily discharge:	244.2 cfs
Runoff per year:	15.05 inches
Max of monthly avg discharge:	2284.5 cfs in 12/1997
Min of monthly avg discharge:	47.1 cfs in 05/1994
Drainage area:	200 square miles

PITHLACHASCOTEE RIVER (Central Region)

Total length:	41 miles
Headwaters:	Crews Lake and Masaryktown area in central Pasco and southern Hernando Counties
Elevation:	120 feet
Mouth:	Gulf of Mexico
Average fall:	2.9 feet/mile
Drainage area:	191 square miles

New Port Richey Station:

County:	Pasco
Period-of-record:	1963
Location:	10.5 miles upstream from mouth
Avg daily discharge:	27.9 cfs
Runoff per year:	2.11 inches
Max of monthly avg discharge:	329.4 cfs in 09/1988
Min of monthly avg discharge:	0.0 cfs
Drainage area:	180 square miles

ALAFIA RIVER (Central Region)

Total length:	24 miles
Headwaters:	Western Polk and eastern Hillsborough Counties
Tributaries:	North and South Prongs, Lithia Springs, and Buckhorn Creek.
Elevation:	30 feet
Mouth:	Tampa Bay
Average fall:	1.5 feet/mile
Drainage area:	420 square miles

Lithia Station:

County:	Hillsborough
Period-of-record:	1932
Location:	16 miles upstream from mouth
Avg daily discharge:	339.7 cfs
Runoff per year:	13.59 inches
Max of monthly avg discharge:	4185.4 cfs in 09/1933
Min of monthly avg discharge:	13.0 cfs in 05/1945
Drainage area:	335 square miles

LITTLE MANATEE RIVER (Central Region)

Total length:	39 miles
Headwaters:	Southeast Hillsborough County
Tributaries:	Carlton Branch, the South Fork, Dug Creek and Cypress Creek.
Elevation:	130 feet
Mouth:	Tampa Bay
Average fall:	3.4 feet/mile
Drainage area:	225 square miles

Wimauma Station:

County:	Hillsborough
Period-of-record:	1939
Location:	15 miles upstream from mouth
Avg daily discharge:	171.4 cfs
Runoff per year:	15.68 inches
Max of monthly avg discharge:	1443.7 cfs in 07/1945
Min of monthly avg discharge:	3.8 cfs in 05/45
Drainage area:	149 square miles

JOSEPHINE CREEK (Southern Region)

Total length:	12 miles
Headwaters:	Lake Josephine in central Highlands County
Elevation:	80 feet
Mouth:	Lake Istokpoga in Highlands County
Average fall:	3.5 feet/mile
Drainage area:	143 square miles

DeSoto City Station:

County:	Highlands
Period-of-record:	1946
Location:	4.9 miles upstream of mouth
Avg daily discharge:	74.2 cfs
Runoff per year:	8.90 inches
Max of monthly avg discharge:	769.9 cfs in 09/1960
Min of monthly avg discharge:	1.1 cfs in 05/56
Drainage area:	109 square miles

MANATEE RIVER (Southern Region)

Total length:	45 miles
Headwaters:	Four corners area Hillsborough, Polk, Hardee and manatee Counties.
Elevation:	130 feet
Mouth:	Tampa Bay
Average fall:	2.9 feet/mile
Drainage area:	330 square miles

Myakka Head Station:

County:	Manatee
Period-of-record:	1966
Location:	36 miles upstream from mouth
Avg daily discharge:	69.6 cfs
Runoff per year:	14.62 inches
Max of monthly avg discharge:	529.7 cfs in 09/1994
Min of monthly avg discharge:	0.5 cfs in 04/75
Drainage area:	65.3 square miles

MYAKKA RIVER (Southern Region)

Total length:	54.1 miles
Headwaters:	Western Hardee and Eastern Manatee Counties
Tributaries:	Howard Creek, Deer Prairie, and Big Slough Canal
Elevation:	105 feet
Mouth:	Charlotte Harbor
Average fall:	1.9 feet/mile
Drainage area:	540 square miles

Sarasota Station:

County:	Sarasota
Period-of-record:	1936
Location:	36 miles upstream from mouth
Avg daily discharge:	250.5 cfs
Runoff per year:	15.03 inches
Max of monthly avg discharge:	2467.2 cfs in 09/1947
Min of monthly avg discharge:	0.0 cfs numerous times
Drainage area:	229 square miles

PEACE RIVER (Central and Southern Region)

Total length:	120 miles
Headwaters:	Green Swamp in northern Polk County through Lake Hancock, Winter Haven chain of lakes, and Lake Hamilton.
Tributaries:	Peace Creek Canal, Saddle Creek, Charlie Creek, Prairie Creek, Horse Creek, Joshua Creek and Shell Creek. Elevation: 110 feet
Mouth:	Charlotte Harbor
Average fall:	1 feet/mile
Drainage area:	2300 square miles

Arcadia Station (Southern Region):

County:	Desoto
Period-of-record:	1931
Location:	36 miles upstream from mouth
Avg daily discharge:	1078.9 cfs
Runoff per year:	10.79 inches
Max of monthly avg discharge:	9876.0 cfs in 09/1933
Min of monthly avg discharge:	51.6 cfs 05/85
Drainage area:	1367 square miles

Bartow Station (Central Region):

County:	Polk
Period-of-record:	1939
Location:	105 miles upstream from mouth
Avg daily discharge:	224.1 cfs
Runoff per year:	6.72 inches
Max of monthly avg discharge:	2261.5 cfs in 09/1960
Min of monthly avg discharge:	6.4 cfs 05/90
Drainage area:	390 square miles

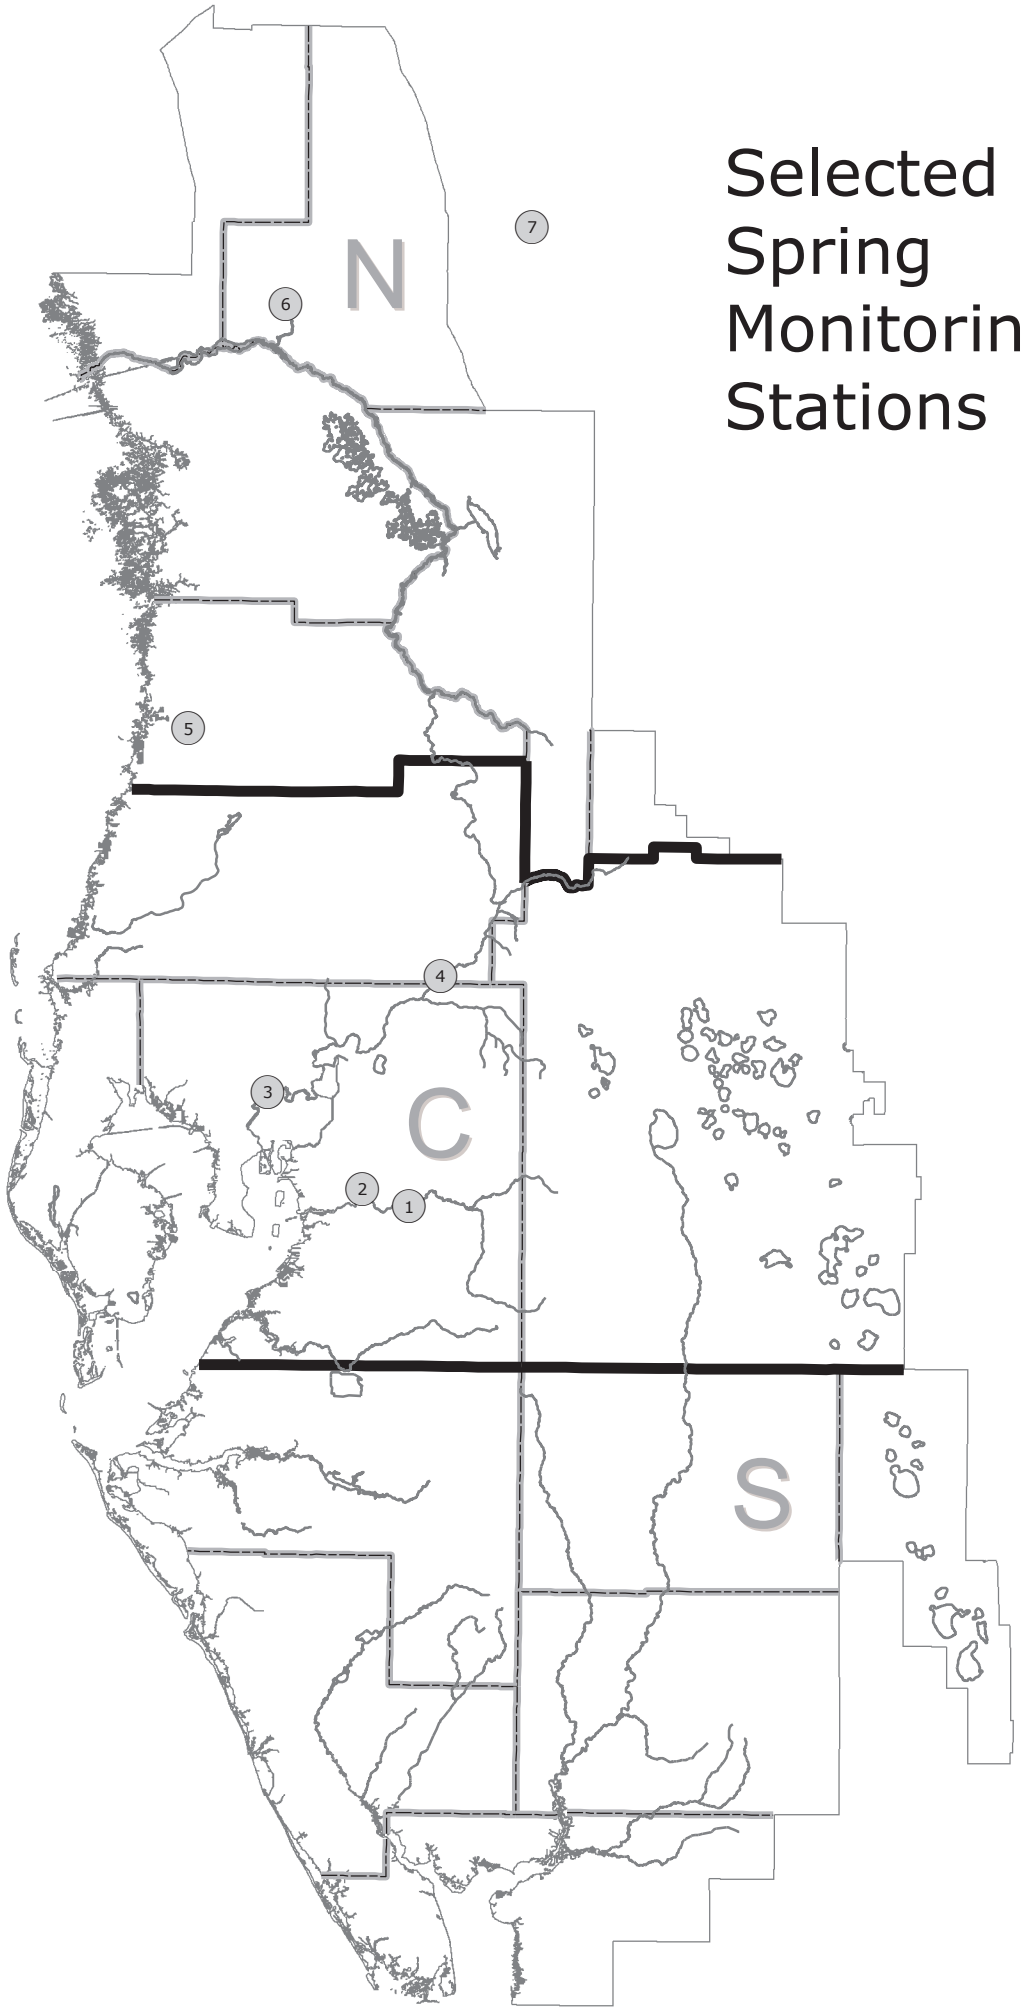

02/2009

Selected Spring Monitoring Stations

Map ID	Site Name
1	Lithia Main Spring
2	Buckhorn Main Spring
3	Sulphur Springs at Sulphur Springs
4	Crystal Springs near Zephyrhills
5	Weeki Wachee River near Brooksville
6	Rainbow Springs near Dunnellon
7	Silver Springs near Ocala

SPRINGS MONITORING STATIONS

RAINBOW SPRINGS (Northern Region)

County:	Marion
Basin:	Withlacoochee River
Magnitude:	1st
Discharge measurement location:	5 mi downstream from head of springs
Discharge contributes to:	Rainbow River, Withlacoochee River
Public Access:	Yes
Period-of-record:	1965
Gage:	Non-recording gage
Maximum daily mean:	1061 cfs in 09/1988
Minimum daily mean:	489 cfs in 06/2000

SILVER SPRINGS (Northern Region)

County:	Marion
Basin:	Ocklawaha River
Magnitude:	1st
Discharge measurement location:	4 to 5 mi downstream from head of springs
Discharge contributes to:	Silver Springs River, Ocklawaha River, St. Johns River
Public Access:	Yes
Period-of-record:	1932
Gage:	Water-stage recorder
Maximum daily mean:	1290 cfs in 10/1960
Minimum daily mean:	432 cfs in 07/2000

WEEKI WACHEE SPRINGS (Northern Region)

County:	Hernando
Basin:	Coastal Rivers
Magnitude:	1st
Discharge measurement location:	1 mi downstream from head of springs
Discharge contributes to:	Weeki Wachee River
Public Access:	Yes
Period-of-record:	1993
Gage:	Water-stage
Maximum daily mean:	229 cfs in 03/1998
Minimum daily mean:	101 cfs in 06/1994

CRYSTAL SPRINGS (Central Region)

County:	Pasco
Basin:	Hillsborough River
Magnitude:	2nd
Discharge measurement location:	Difference between discharge measurements of Hillsborough River made upstream from and downstream from Crystal Springs
Discharge contributes to:	Hillsborough River
Public Access:	No
Period-of-record:	1923
Gage:	Non-recording gage
Maximum daily mean:	147 cfs in 07/1941
Minimum daily mean:	22 cfs in 08/1986

SULPHUR SPRINGS (Central Region)

County:	Hillsborough
Basin:	Hillsborough River
Magnitude:	2nd
Discharge measurement location:	300 ft downstream from gage
Discharge contributes to:	Hillsborough River
Public Access:	Yes
Period-of-record:	1956
Gage:	Water-stage recorder
Maximum daily mean:	145 cfs in 03/1960
Minimum daily mean:	0 cfs for various days throughout the period-of-record

BUCKHORN SPRINGS (Central Region)

County:	Hillsborough
Basin:	Alafia River
Magnitude:	2nd
Discharge measurement location:	Difference between discharge measurements of Buckhorn Creek made 25 ft upstream from and 100 ft downstream from Buckhorn Springs
Discharge contributes to:	Buckhorn Creek, Alafia River
Public Access:	No
Period-of-record:	1987
Gage:	Water-stage recorder
Maximum daily mean:	21.9 cfs in 02/1989
Minimum daily mean:	2.7 cfs in 06/1987

LITHIA SPRINGS: (Central Region)

County:	Hillsborough
Basin:	Alafia River
Magnitude:	2nd
Discharge measurement location:	50 feet downstream from main pool
Discharge contributes to:	Alafia River
Public Access:	Yes
Period-of-record:	1934
Gage:	Water-stage recorder
Maximum daily mean:	83.4 cfs in 10/1967
Minimum daily mean:	6.3 cfs in 02/1989

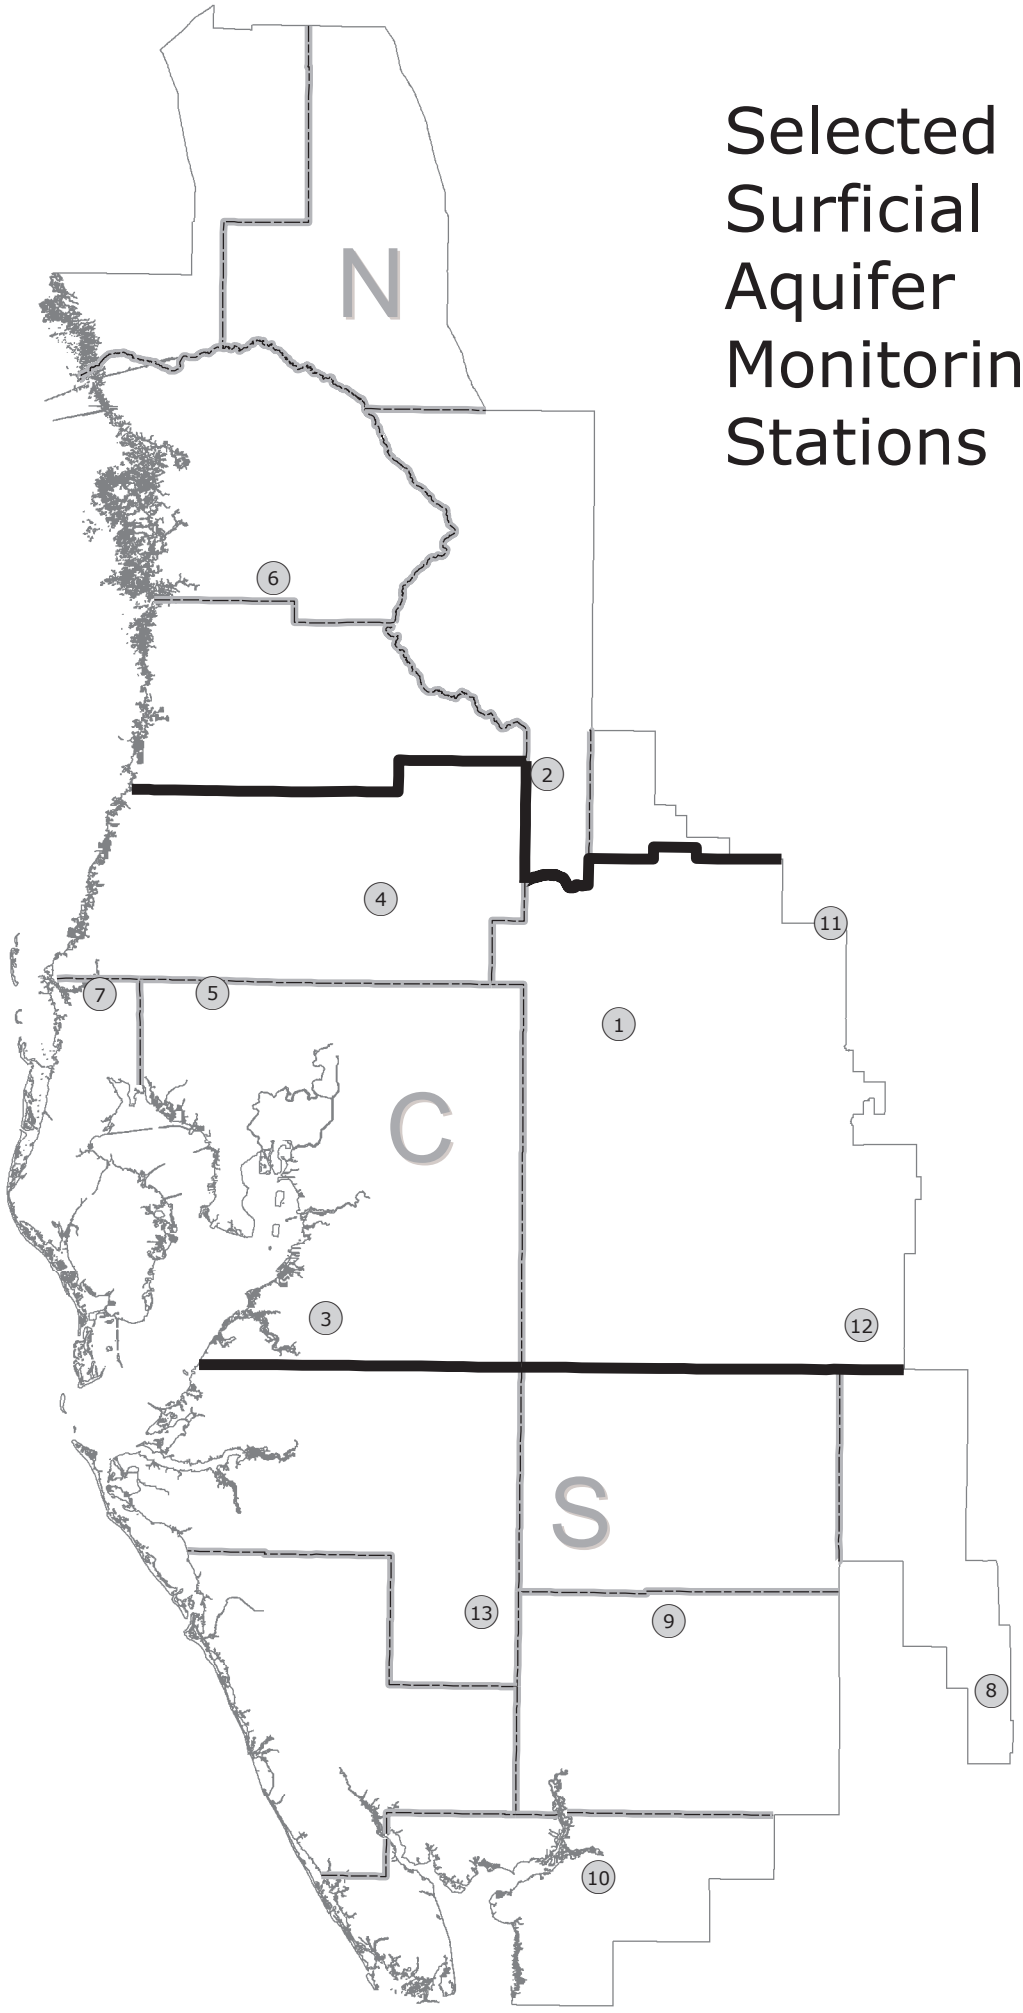
Selected
Surficial
Aquifer
Monitoring
Stations
N
C
S
1
2
3
4
5
6
7
8
9
10
11
12
13
N
W
E
S

02/2009

Selected Surficial Aquifer Monitoring Stations

Map ID	Site Name
1	State Road 33/Combee Road Shallow
2	Green Swamp L12B Shallow
3	ROMP 50 Surficial
4	State Road 577 Shallow
5	Lutz-Lake Fern Shallow
6	Lecanto 2 Shallow
7	Tarpon Road Shallow
8	Bairs Den Surficial
9	ROMP 26 Surficial
10	State Road 74 (77-Foot) Shallow
11	Loughman Shallow
12	USGS P-48 Shallow
13	Edgeville 4 Shallow

Selected Groundwater & Aquifer Resource Monitoring Stations

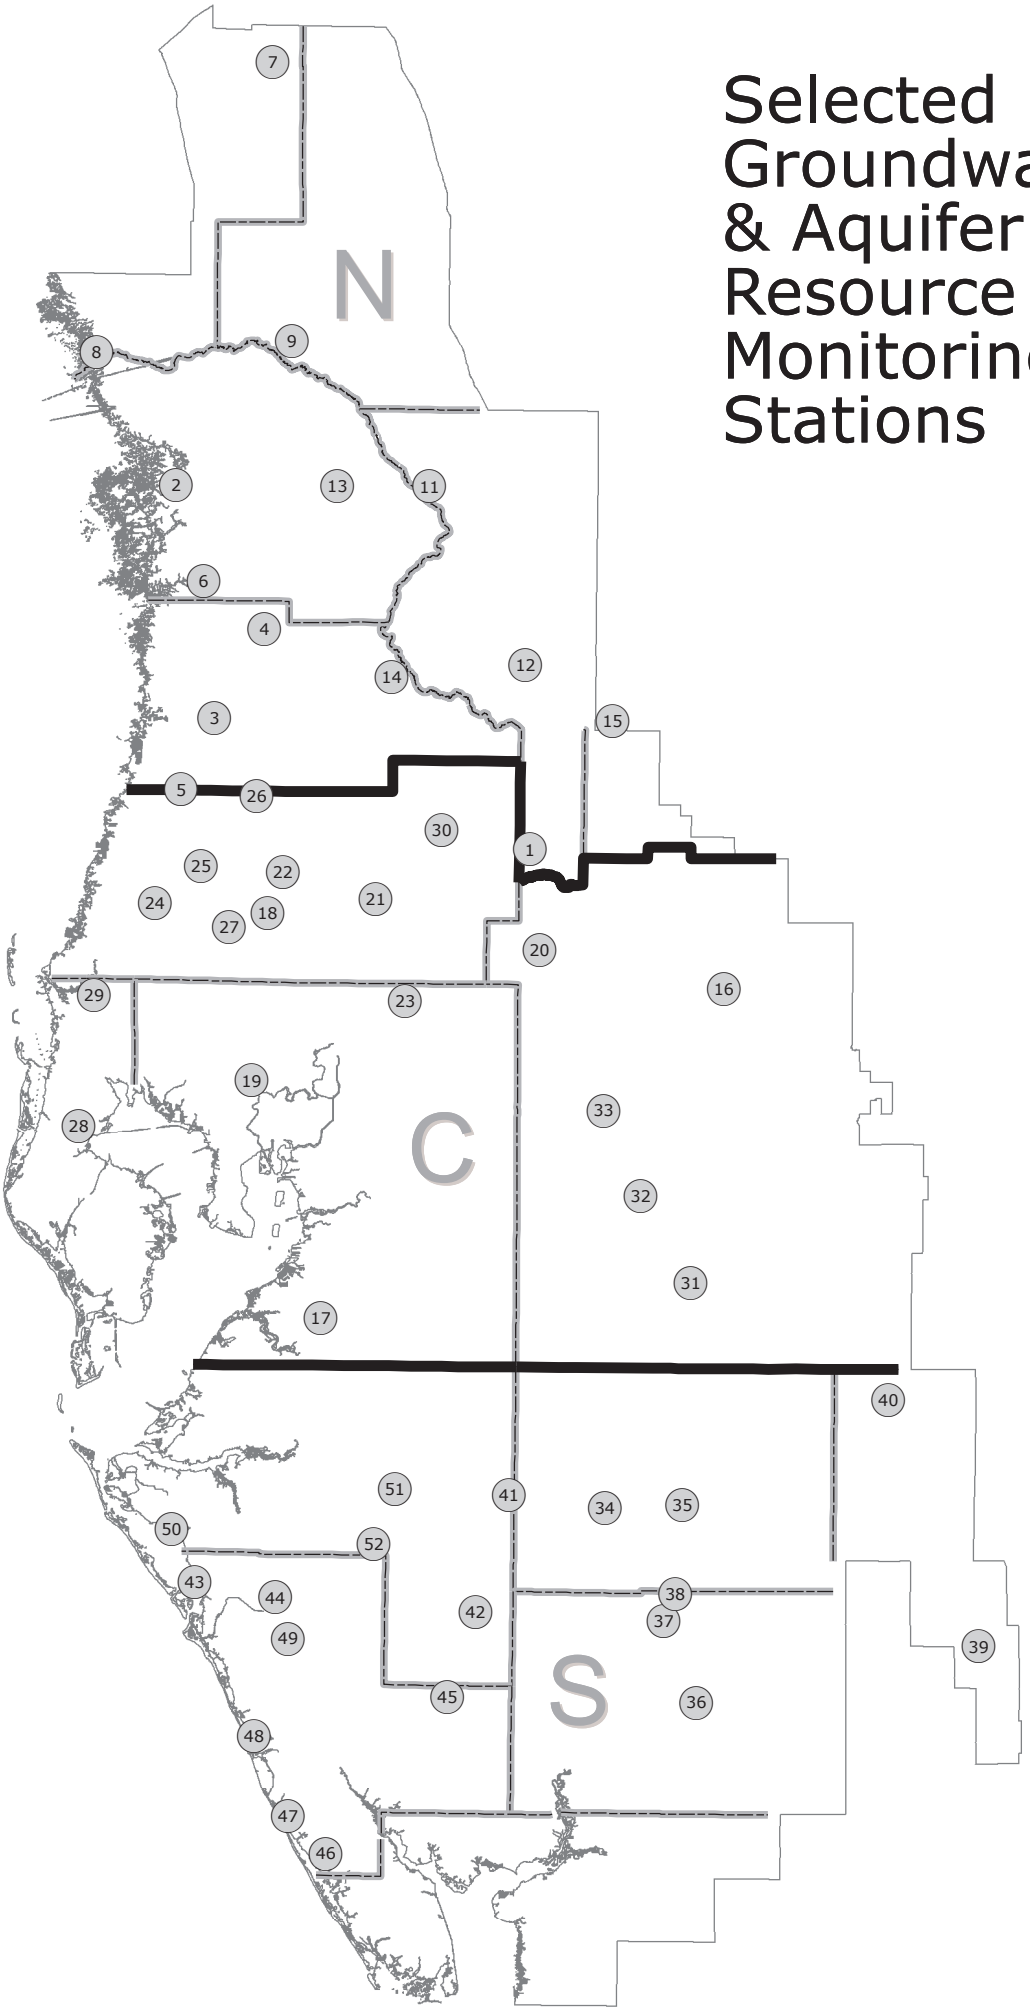



02/2009

Selected Groundwater & Aquifer Resource Monitoring Stations

Map ID	Site Name
1	ROMP 89 Ocala
2	ROMP TR 21-2 Ocala/Avon Park
3	Weeki Wachee Deep
4	ROMP 107 Ocala/Avon Park
5	ROMP 97 Avon Park
6	Chassahowitzka 1 Deep
7	ROMP 134 Ocala/Avon Park
8	ROMP TR 124 Avon Park
9	CE 14 Dunnellon Deep
10	Verna Test 0-1
11	Sumter 13 JC 59 Upper Floridan
12	Webster City Floridan
13	Inverness DOT Floridan
14	ROMP 103 Suwannee/Ocala
15	Mascotte Deep
16	Lake Alfred Deep near Lake Alfred
17	ROMP 50 Avon Park
18	Pasco 13 Floridan near Drexel
19	ROMP 66 Tampa
20	ROMP 87 Avon Park
21	State Road 577 Deep
22	ROMP 93 Suwannee/Avon Park
23	Hillsborough River State Park Parking Lot Deep
24	Moon Lake Deep
25	State Road 52 Deep West near Fivay Junction
26	Masaryktown Deep
27	Bexley 2 Floridan
28	Pinellas 665 Floridan
29	Tarpon Road Deep
30	Lykes Pasco Floridan
31	ROMP 45 Avon Park
32	ROMP 59 Suwannee/Avon Park
33	Sanlon Ranch Floridan
34	ROMP 31 Suwannee/Avon Park
35	ROMP 30 Suwannee/Avon Park
36	ROMP 16 Ocala
37	ROMP 26 Suwannee/Avon Park
38	Marshall Deep
39	ROMP 28X Suwannee/Avon Park
40	ROMP 43XX Avon Park
41	ROMP 32 Lower Ocala/Avon Park
42	Edgeville 3 Deep
43	Sarasota 11th Street Deep
44	Sarasota 9 Deep
45	Big Slough Deep
46	Englewood 14 Deep
47	Manasota 14 Deep
48	ROMP TR 5-1 Suwannee
49	Florida Cities Test 1
50	ROMP TR 7-1 Tampa
51	Kibler Deep

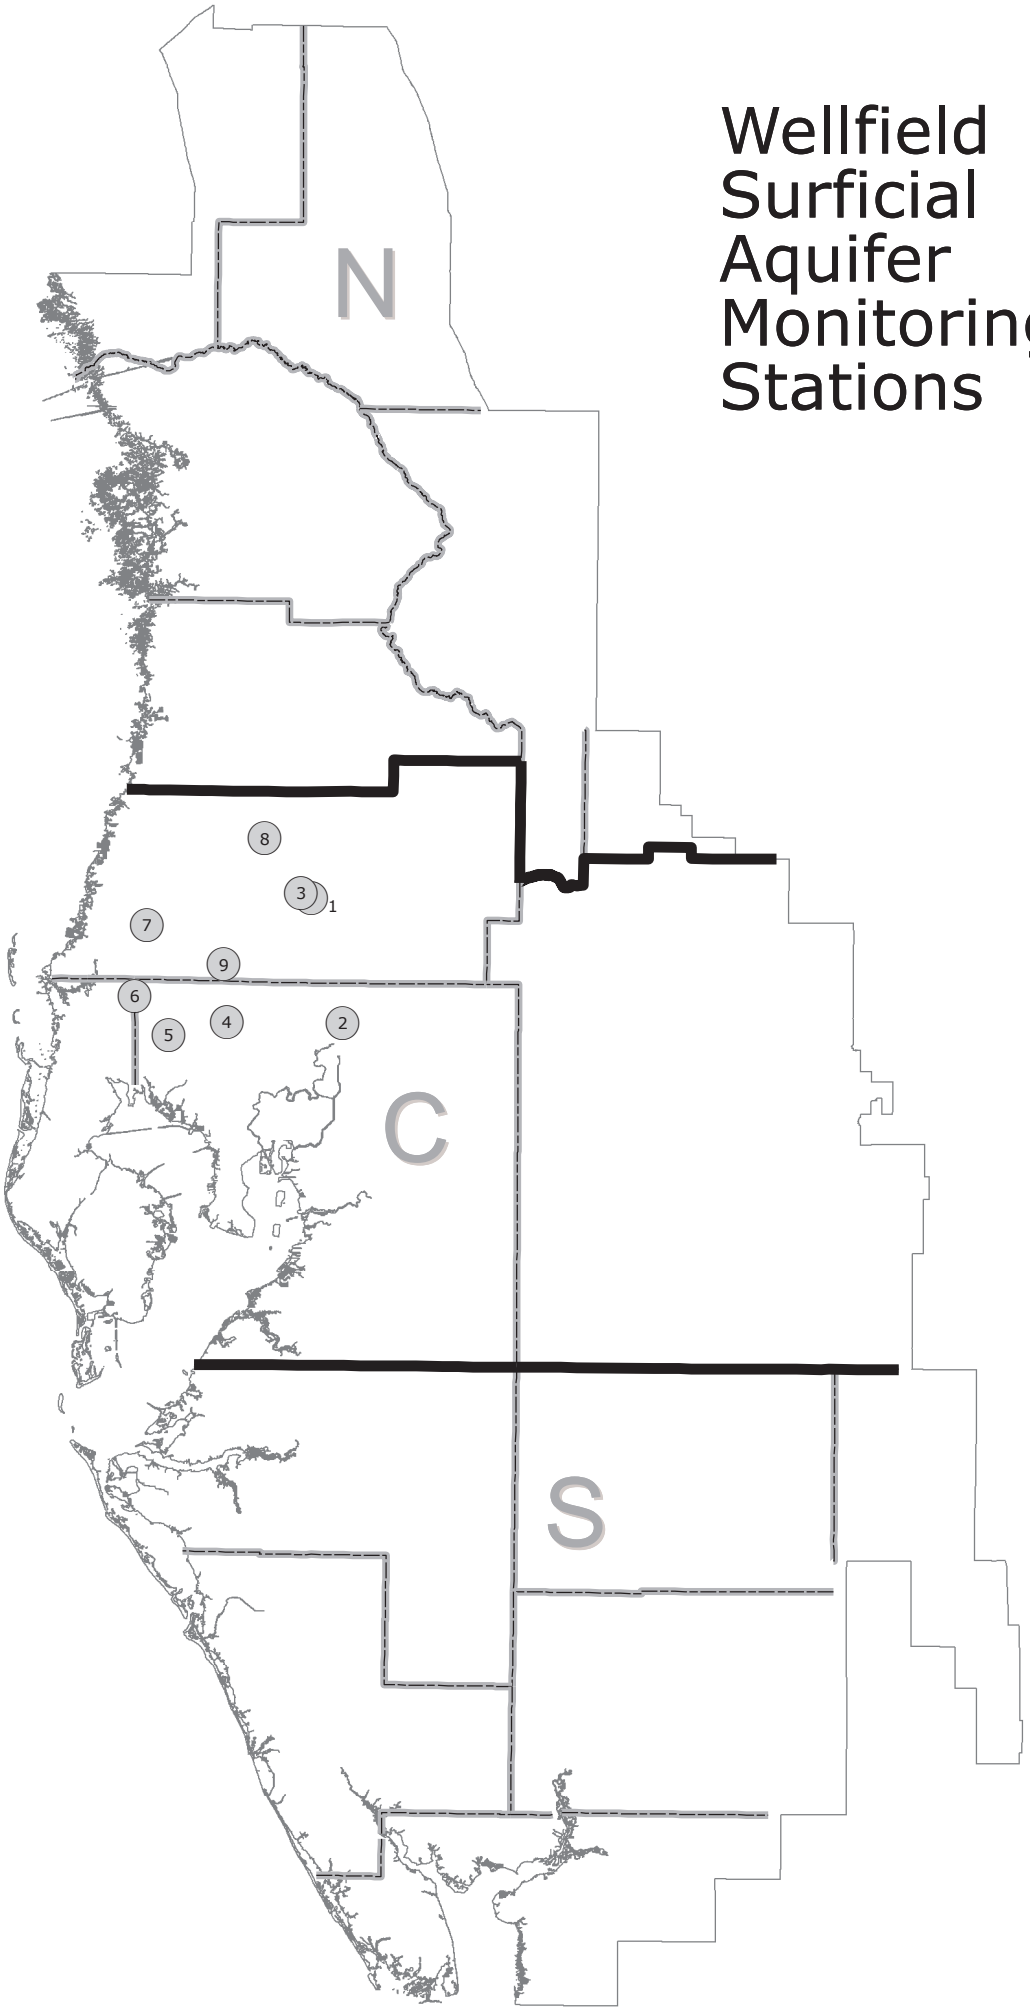
Wellfield
Surficial
Aquifer
Monitoring
Stations
N
C
S
8
3
1
7
9
6
5
4
2
N
W
E
S

02/2009

Wellfield Groundwater Monitoring Stations

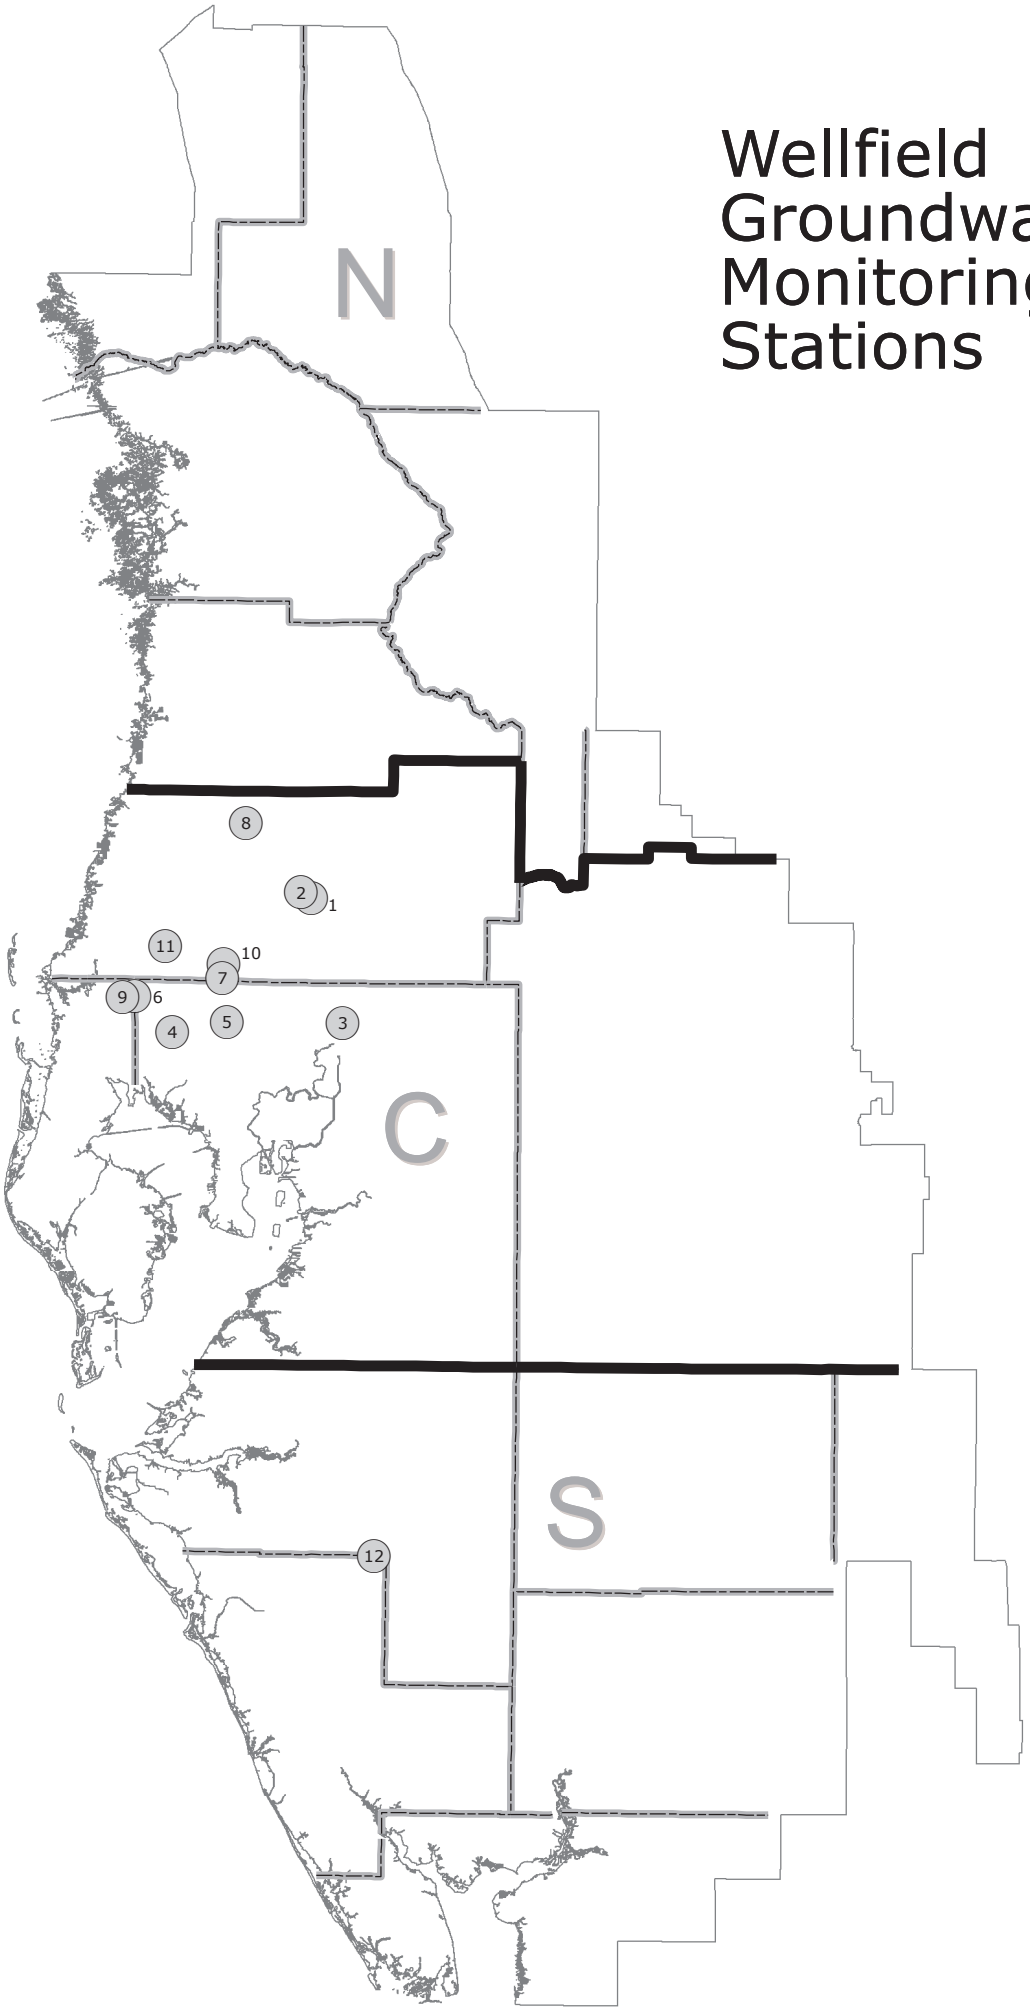

02/2009

Wellfield Groundwater Monitoring Stations

Map ID	Site Name
1	Cypress Creek TMR-1 Deep
2	Cypress Creek TMR-3 Deep
3	Morris Bridge 3A Floridan
4	Cosme 3 Floridan
5	St. Pete Hillsboro 13 Deep
6	Eldridge-Wilde 11 Floridan
7	St. Pete 42 Deep
8	Cross Bar WRW Floridan
9	Eldridge-Wilde 2S Deep
10	State Road 54 Deep
11	Starkey Regional Floridan
12	Verna 08 Deep

Wellfield Surficial Aquifer Monitoring Stations

Map ID	Site Name
1	Cypress Creek TMR-1 Shallow
2	Morris Bridge 3A Surficial
3	Cypress Creek TMR-3 Shallow
4	St. Pete Hillsboro 13 Shallow
5	St. Pete IC-6 Shallow
6	Eldridge-Wilde 11 Surficial
7	Starkey 707 Shallow
8	Cross Bar SERW Shallow
9	State Road 54 Shallow

Reservoir Locations

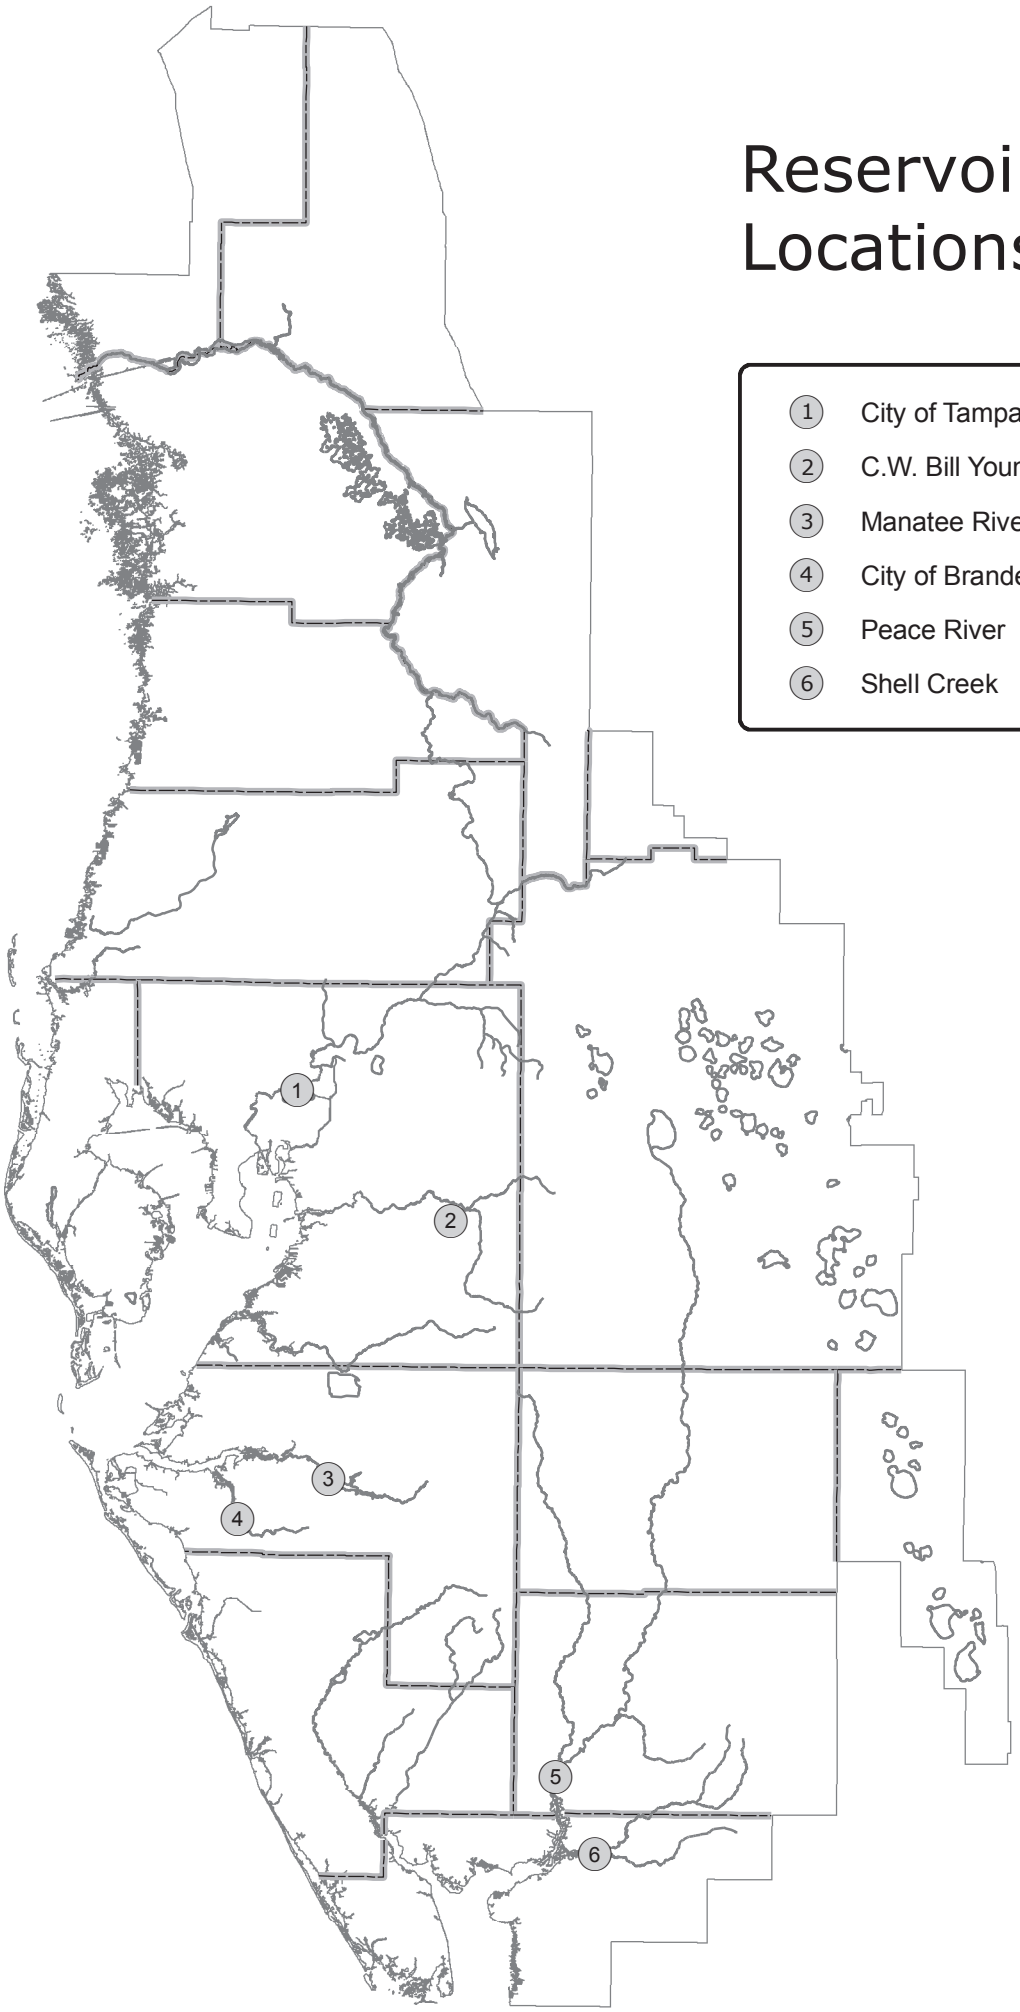

1. City of Tampa
2. C.W. Bill Young Regional
3. Manatee River
4. City of Brandenton (Evers)
5. Peace River
6. Shell Creek

N
W
E
S

02/2009