Hydrologic Conditions

for the month of

November 2019

Prepared by the

Hydrologic Data Section

Data Collection Bureau



December 10, 2019

http://www.watermatters.org

ACKNOWLEDGMENTS

The Hydrologic Conditions Report is a monthly effort of the Data Collection Bureau's Hydrologic Data Section. Acknowledgment is made to the following staff for their significant contributions, hard work and dedication to the timely production of this report:

Data Collection: Terry Burrell, Dave Goldberg-Dunnett, Don Everson,

George Prine, James Ferrell, Greg Johnston, Everett

Eldridge, Robert Noland, Aaron Cronk, James

Thomas and Grayson Conklin.

QA/QC and Reporting: Margit Crowell, Steve DeSmith, Asmita Shukla,

Hannah Kolb and Joey Fogel.

Administrative Support/

Document Preparation: Karen Diez, Lora Caruso and Shelley Browning.

TABLE OF CONTENTS

Introduction	1
Executive Summary – Provisional	. 2
Executive Summary	3
Regional Overview	4
Rainfall	5 - 12
Surface Water	
Lakes	. 13 - 20
Streams	. 21 - 25
Springs	26 - 29
Ground Water	
Description of Groundwater Monitoring	30
Surficial Aquifer	31 - 32
Intermediate and Floridan Aquifers	33 - 43
Public Supply Wellfields	44 - 45
Aquifer Resource	46 - 47
Water Demand	
Description of Public Supply Surface Water Reservoirs	48 - 49
Reservoirs	50 - 55
Appendices	
Rainfall Percentiles by Intervals & Region	56 - 57
Rainfall Grid (NEXRAD)	58
Lake Monitoring Stations	59 - 64
Stream Monitoring Stations	65 - 66
Description of Stream Monitoring Stations	67 - 70
Springs Monitoring Stations	. 71 - 72
Description of Springs Monitoring Stations	. 73 - 74
Surficial Aquifer Monitoring Stations	. 75 - 76
Groundwater & Aquifer Resource Monitoring Stations	. 77 - 78
Wellfield Groundwater Monitoring Stations	79 - 81
Reservoir Locations	82

INTRODUCTION

The Hydrologic Conditions Report is generated monthly by the Hydrologic Data Section, Data Collection Bureau, of the Southwest Florida Water Management District. This report provides an end-of-month analytical summary of regional and temporal variations in the hydrologic conditions across the District's 16-county area for planning and regulatory purposes. In addition, it provides an excellent historical record for long-term local and regional hydrologic analysis.

The Hydrologic Data Section is responsible for the implementation and maintenance of a network of observation and monitoring stations used to track changes in various hydrologic parameters over time. Data collected are used by the regulatory, technical, and analytical sections of the District. Data recently collected and maintained by the section include: station and basin rainfall totals, stream and spring discharge measurements, and surface and ground water levels. Frequency of data collection ranges from hourly to monthly readings. All data collected are processed and analyzed, then uploaded into the Water Management Data Base for general access by the District. The Water Management Data Base is also periodically augmented from the United States Geological Survey's hydrologic data network.

The data presented in this report are monthly rainfall totals, streamflow, springflow, surface and ground water levels, reservoir levels and the Aquifer Resource Index. Associated maps of station locations are at the end of the report in the Appendices. Also reported herein are levels of public supply surface water reservoirs supplemented by various regional utilities. The data contained in this report was collected and analyzed in accordance with generally accepted procedures consistent with applicable scientific and technical standards of practice. The data presented are considered to be the best available at the time of publication and are subject to revision. Any questions about the significance, accuracy, or interpretation of these data should be referred to Granville Kinsman, Manager of the Hydrologic Data Section at (352) 796-7211 or (800) 423-1476, extension 4284.

The data evaluation, analyses and interpretation contained within this report have been prepared or approved by a certified Professional Geologist in accordance with Chapter 492, Florida Statutes.

Registration #PG-1704

Americans with Disabilities Act (ADA)

The Southwest Florida Water Management District (District) does not discriminate on the basis of disability. This nondiscrimination policy involves every aspect of the District's functions, including access to and participation in the District's programs and activities. Anyone requiring reasonable accommodation as provided for in the Americans with Disabilities Act should contact the District's Human Resources Bureau Chief, 2379 Broad Street, Brooksville, Florida 34604-6899; telephone (352) 796-7211 or 1-800-423-1476 (FL only), ext. 4703; or email ADACoordinator@swfwmd.state.fl.us. If you are hearing or speech impaired, please contact the agency using the Florida Relay Service, 1(800)955-8771(TDD) or 1(800)955-8770(Voice).

EXECUTIVE SUMMARY

Provisional Hydrologic Conditions as of December 6, 2019

The provisional hydrologic data that is typically contained in this report was unavailable at the time this report was finalized prior to publication, which was on December 6, 2019.

EXECUTIVE SUMMARY

Hydrologic Conditions for November 2019

In November, average rainfall totals were within the normal range in all three regions of the District. The normal range for rainfall is defined by totals that fall on or between the 25th to 75th percentiles of the historical monthly accumulation for each region and where the 50th percentile represents the historical mean. The northern region received an average of 1.88 inches of rainfall, equivalent to the 58th percentile of the historical November record. The central region received an average of 1.53 inches of rainfall, equivalent to the 53rd percentile, while the southern region received an average of 1.02 inches of rainfall, equivalent to the 39th percentile of the historical November record. The District-wide rainfall average of 1.45 inches was equivalent to the 47th percentile of the historical November record.

During the 12-month period from December 1, 2018 through November 30, 2019, the average rainfall totals in the northern and central regions were classified as "wetter than normal," while the southern region was classified as "normal." The northern region received an average of 63.24 inches of rainfall, equivalent to the 90th percentile of the historical annual record. The central region received an average of 60.04 inches of rainfall, equivalent to the 84th percentile, while the southern region received an average of 50.67 inches of rainfall, equivalent to the 45th percentile. The District-wide rainfall average of 57.68 inches was equivalent to the 77th percentile of the historical annual record.

Average lake levels in November were within the annual normal range in all four lake regions of the District. Normal lake levels are defined as levels that fall between the minimum low management level and the minimum flood level. Lake levels in the Northern region decreased by an average of 0.08 foot and were 0.37 foot above the base of the annual normal range. Lake levels in the Tampa Bay region decreased an average of 0.13 foot and were 1.21 feet above the base of the annual normal range. Lake levels in the Polk Uplands region decreased 0.19 foot and were 2.20 feet above the base of the annual normal range. Average lake levels in the Lake Wales Ridge region decreased by 0.30 foot and ended the month 0.10 foot above the base of the annual normal range.

Total streamflow in November, based on regional index streams, was within the normal range in the northern and southern regions of the District, while flow was above-normal in the central region. Normal streamflow is defined as the flow that falls on or between the 25th and 75th percentiles. Streamflow measured at the Withlacoochee River near Holder station in the northern region was in the 60th percentile. Streamflow in the Hillsborough River near Zephyrhills station in the central region was in the 84th percentile, while total streamflow measured at the Peace River at Arcadia station in the southern region was in the 67th percentile during November.

In November, groundwater data showed that levels in the intermediate and Floridan aquifers were above-normal in the northern and central regions of the District, while it was within the normal range in the southern region. The normal range is defined as the level that falls on or between the 25th and 75th percentiles. The groundwater level in the northern, central and southern regions were in the 84th, 77th and 52nd percentiles, respectively.

REGIONAL OVERVIEW OF HYDROLOGIC CONDITIONS

NOVEMBER 2019

Northern Region

In November, the northern region received an average of 1.88 inches of rainfall, equivalent to the 58th percentile of the historical November readings, which is considered "normal." Average lake levels decreased in the northern region and ended the month an average of 0.37 foot above the base of the annual normal range. Total streamflow measured in the Withlacoochee River near Holder station increased and was in the 60th percentile. Regional groundwater levels indicated average surficial aquifer water levels decreased and were in the 86th percentile, while levels in the intermediate and Floridan aquifer decreased and were in the 84th percentile.

Central Region

In November, the central region received an average of 1.53 inches of rainfall, equivalent to the 53rd percentile of historical November readings, which is considered "normal." Average lake levels decreased in the Tampa Bay and Polk Uplands regions, ending the month 1.21 and 2.20 feet, respectively, above the base of the annual normal range. Total streamflow measured at the Hillsborough River near Zephyrhills station decreased and was in the 84th percentile. Regional groundwater levels indicated average surficial aquifer water levels decreased and were in the 84th percentile, while levels in the intermediate and Floridan aquifer decreased and were in the 77th percentile.

Southern Region

In November, the southern region received an average of 1.02 inches of rainfall, equivalent to the 39th percentile of historical November readings, which is considered "normal." Average lake levels decreased in the Lake Wales Ridge region and ended the month 0.10 foot above the base of the annual normal range. Total streamflow measured at the Peace River at Arcadia station decreased and was in the 67th percentile. Regional groundwater levels indicated average surficial aquifer water levels decreased and were in the 45th percentile, while levels in the intermediate and Floridan aquifer decreased and were in the 52nd percentile.

RAINFALL

The rainfall data used for all tabulations in this report are provided to the District under contract with an external vendor. These data are created by enhancing contractor-developed NEXRAD radar rainfall imagery with 15-minute rainfall data collected from the District's network of real-time gauges. This process results in highly accurate cell-based rainfall data representative of conditions over the entire District, including those portions where rainfall data collection would otherwise be limited due to gaps in the gauging network.

As defined by the United States Geological Survey (USGS), a percentile is a value on a scale of one hundred that indicates the percent of a distribution that is equal to or below it. For example, a rainfall total equivalent to the 90th percentile is equal to or greater than 90 percent of the rainfall totals recorded for this month during all years that totals have been recorded.

Percentiles for rainfall were calculated from the historical record by region, and by specific interval. The "wet season" total is the sum of the rainfall from June through September. The "dry season" total is the sum of the rainfall from October through May. The annual total characterization was calculated from a dataset of moving 12-month rainfall sum for the same period (1915 through the most recent completed year). The moving 12-month rainfall sum was used for annual statistics because it provided a much larger dataset, and therefore a better estimate of the true percentiles. The historical 12-month cumulative average is updated monthly.

Characterization ranges were established for each region, and for the whole District, with breaks at the 10th (P10), the 25th (P25), the 75th (P75) and the 90th (P90) percentiles. The rainfall in inches for each percentile break, by rainfall interval and by region and the characterization ranges are summarized in the Appendix.

In November, rainfall totals were within the normal range in all three regions of the District. The normal range for rainfall is defined by totals that fall on or between the 25th to 75th percentiles of the historical monthly average for each region and where the 50th percentile represents the historical mean. The northern region received an average of 1.88 inches of rainfall, equivalent to the 58th percentile of the historical November record. The central region received an average of 1.53 inches, equivalent to the 53rd percentile, while the southern region received an average of 1.02 inches, equivalent to the 39th percentile. District-wide, rainfall averaged 1.45 inches, which is equivalent to the 47th percentile of the historical November record.

During the 12-month period from December 1, 2018 through November 30, 2019, the average rainfall totals in the northern and central regions of the District were classified as "wetter than normal," while the southern region was classified as "normal." The northern region received an average of 63.24 inches of rainfall, equivalent to the 90th percentile of the historical record. The central region received an average of 60.04 inches of rainfall, equivalent to the 84th percentile. The southern region received an average of 50.67 inches of rainfall, equivalent to the 45th percentile. The District-wide rainfall average was 57.68 inches, which is equivalent to the 77th percentile of the historical annual record.

Tampa Monthly Climate Summary for November 2019

According to the National Weather Service, the monthly average temperature (°F) for Tampa was 69.1 degrees, which was within the normal range. The highest temperature recorded during the month was 87.0 degrees, while the lowest temperature recorded during the month was 50.0 degrees. The November 2019 monthly average temperature of 69.1 degrees ties with 1933 as the 39th warmest November since records began in 1890. The warmest November had an average temperature of 76.3 degrees, which occurred in 1986.

Temperature and Precipitation Outlook

The Climate Prediction Center's (CPC) three-month weather forecast, as of November 30, 2019, indicates equal chances for below-normal, normal or above-normal rainfall throughout the District during multiple composite 3-month period from December 2019 through February 2020. The temperature forecast for this same time-period indicates above-normal temperatures in all three regions of the District.

[Note: Due to the early publication date of December 10, 2019 for this report, the CPC's December 19, 2019 forecast was unavailable].

For more information log on to the CPC's website at:

http://www.cpc.ncep.noaa.gov/products/OUTLOOKS index.html

RELATIONSHIP OF NOVEMBER 2019 RAINFALL TO HISTORICAL RAINFALL AVERAGES

Regional Summary:

Region	NOV 2019 Average Rainfall	Historical Average for NOV	Departure from Historical Average	Calendar Year 2019 Cumulative Rainfall JAN-NOV	Calendar Year Historical Cumulative Rainfall JAN-NOV	Departure from Historical Cumulative NOV 2019	Cumulative 12-month Rainfall DEC 2018- NOV 2019	Historical 12-month Cumulative Rainfall	Departure from Historical 12-month Cumulative
Northern Counties	1.88	1.97	-0.09	52.90	51.01	1.89	63.24	53.61	9.63
Central Counties	1.53	1.82	-0.29	52.28	50.07	2.21	60.04	52.42	7.62
Southern Counties	1.02	1.76	-0.74	45.73	50.50	-4.77	50.67	52.44	-1.77
District All Counties	1.45	1.84	-0.39	50.18	50.48	-0.30	57.68	52.75	4.93
Regional Counti	es Summary:								
NORTHERN COUNTIES	NOV 2019 Average Rainfall	Historical Average for NOV	Departure from Historical Average	Calendar Year 2019 Cumulative Rainfall JAN-NOV	Calendar Year Historical Cumulative Rainfall JAN-NOV	Departure from Historical Cumulative NOV 2019	Cumulative 12-month Rainfall DEC 2018- NOV 2019	Historical 12-month Cumulative Rainfall	Departure from Historical 12-month Cumulative
Levy County	2.14	2.10	0.04	55.94	51.03	4.91	66.83	53.99	12.84
Marion County	1.47	2.07	-0.60	51.43	51.55	-0.12	63.33	54.35	8.98
Citrus County	1.63	1.94	-0.31	55.56	51.48	4.08	66.52	54.11	12.41
Sumter County	1.96	1.92	0.04	50.19	49.47	0.72	59.18	51.95	7.23
Hernando County	2.33	1.97	0.36	52.29	52.48	-0.19	61.91	55.03	6.88
CENTRAL COUNTIES									
Pasco County	2.13	1.92	0.21	52.20	51.65	0.55	60.83	54.08	6.75
Pinellas County	0.90	1.83	-0.93	56.49	49.35	7.14	65.21	51.72	13.49
Hillsborough County	1.05	1.78	-0.73	52.57	50.44	2.13	60.66	52.69	7.97
Polk County	1.68	1.77	-0.09	51.35	49.97	1.38	58.30	52.03	6.27
SOUTHERN COUNTIES									
Manatee County	0.80	1.82	-1.02	47.45	51.43	-3.98	54.98	53.46	1.52
Hardee County	1.20	1.69	-0.49	46.63	50.32	-3.69	51.67	52.15	-0.48
Highlands County	1.40	1.71	-0.31	45.72	50.38	-4.66	48.05	52.03	-3.98
Sarasota County	0.72	1.81	-1.09	43.82	50.71	-6.89	50.70	52.71	-2.01
DeSoto County	1.15	1.70	-0.55	44.42	50.11	-5.69	47.40	51.90	-4.50
Charlotte County	1.05	1.68	-0.63	45.71	50.80	-5.09	48.37	52.61	-4.24

NOVEMBER 2019 RAINFALL CHARACTERIZATION

1.05

45

Normal

Regional Characterization:

Charlotte County


Region	NOV 2019 Average Rainfall	Historical NOV Percentile	NOV Rainfall Characterization	Cumulative 12-month Rainfall DEC 2018- NOV 2019	Historical 12-month Cumulative Percentile	12-month Cumulative Rainfall Characterization
Northern Counties	1.88	58	Normal	63.24	90	Wetter than normal
Central Counties	1.53	53	Normal	60.04	84	Wetter than normal
Southern Counties	1.02	39	Normal	50.67	45	Normal
District Counties	1.45	47	Normal	57.68	77	Wetter than normal
Regional Counti	es Characterizat	ion:				
	NOV 2019 Average	Historical NOV	NOV Rainfall	Cumulative 12-month Rainfall DEC 2018-	Historical 12-month Cumulative	12-month Cumulative Rainfall
NORTHERN COUNTIES	Rainfall	Percentile	Characterization	NOV 2019	Percentile	Characterization
Levy County	2.14	64	Normal	66.83	91	Very wet
Marion County	1.47	48	Normal .	63.33	86	Wetter than normal
Citrus County	1.63	57	Normal	66.52	94	Very wet
Sumter County	1.96	63	Normal	59.18	82	Wetter than normal
Hernando County	2.33	71	Normal	61.91	78	Wetter than normal
CENTRAL COUNTIES						
Pasco County	2.13	69	Normal	60.83	79	Wetter than normal
Pinellas County	0.90	37	Normal	65.21	92	Very wet
Hillsborough County	1.05	41	Normal	60.66	85	Wetter than normal
Polk County	1.68	58	Normal	58.30	78	Wetter than normal
SOUTHERN COUNTIES						
Manatee County	0.80	29	Normal	54.98	61	Normal
Hardee County	1.20	50	Normal	51.67	51	Normal
Highlands County	1.40	56	Normal	48.05	34	Normal
Sarasota County	0.72	30	Normal	50.70	45	Normal
DeSoto County	1.15	42	Normal	47.40	35	Normal

48.37

37


Normal

NOVEMBER 2019 RAINFALL HISTORIC AVERAGE VS HISTORICAL NOVEMBER AVERAGE (INCHES)

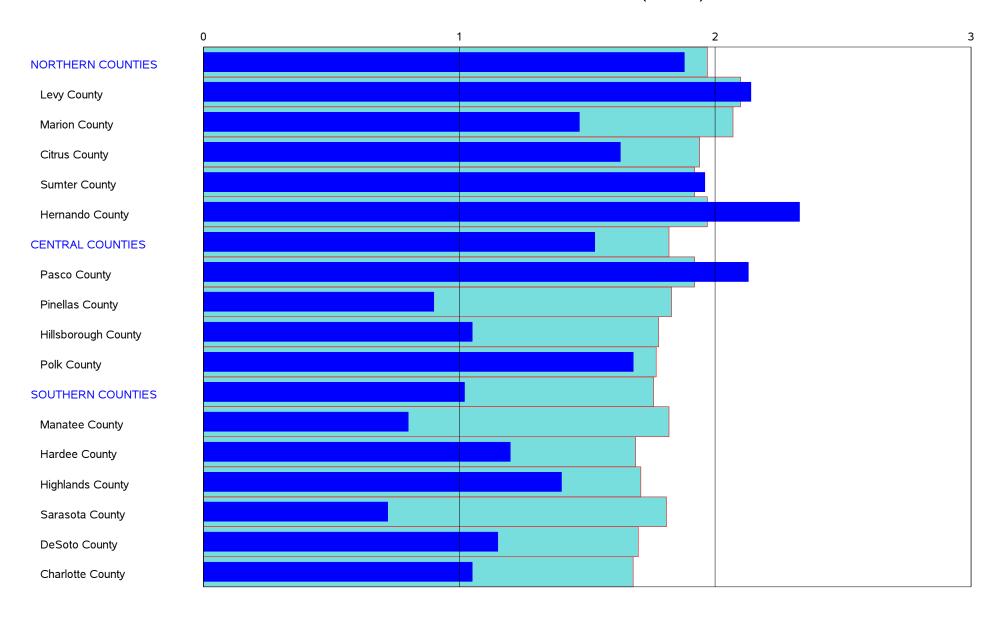





NOVEMBER 2019 12-MONTH CUMULATIVE RAINFALL VS AVERAGE ANNUAL CUMULATIVE (INCHES)

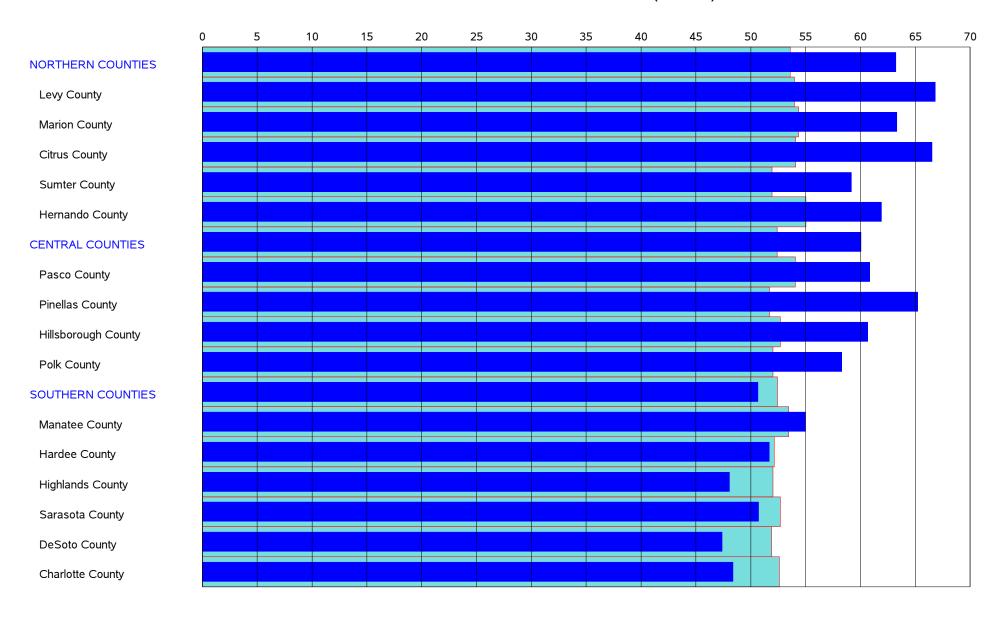



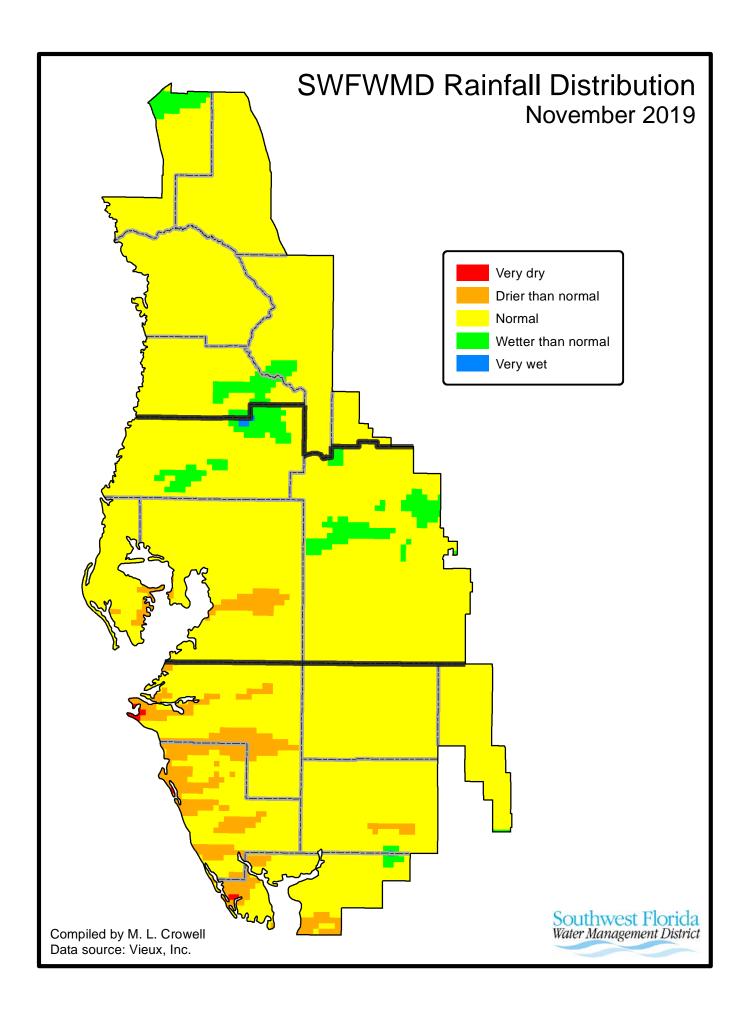

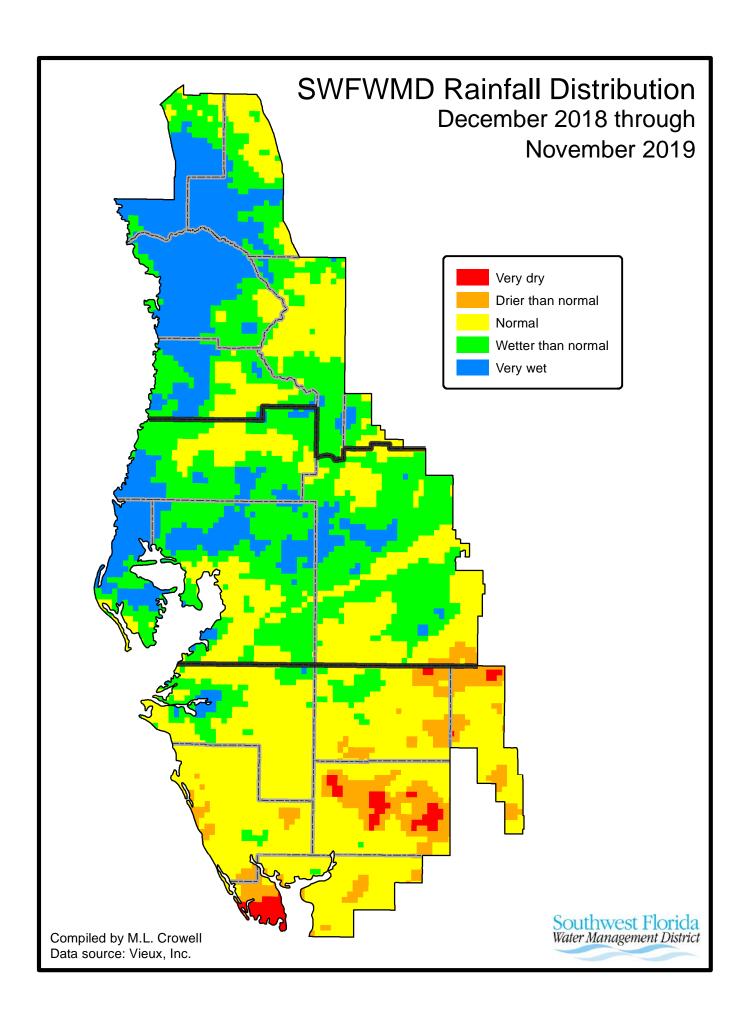

SURFACE WATER

Lakes

Across the District, 76 lakes have been selected as excellent indicators of current surface water conditions (see index map in Appendix). Water levels of these lakes are read monthly. In general, these lakes are concentrated in four regions, the northern region of Citrus, Hernando, and Sumter Counties, the Tampa Bay region of Hillsborough and Pasco Counties, the Polk Uplands region of northern Polk County, and the Lake Wales Ridge region of Polk and Highlands Counties. In this report, current monthly lake levels are tabulated and compared with previous records as well as District-established management levels. In addition, lake-level data representative of the four regions are presented in hydrographs showing a 15-year history of water levels, as a general indicator of surface-water conditions in that region.

The District's Governing Board (the Board) has established lake management levels for approximately 410 lakes within District boundaries, which are specified in Chapter 40D-8, Florida Administrative Code (F.A.C.). Management levels help protect the water resources of the District and the ecology of the lake or water-body for which it was established. In this report, the following three management levels are used to indicate normal and low lake levels: the Minimum Flood (MF) level, the Minimum Low Management (MLM) level, and the Minimum Extreme Low Management (MELM) level. In general, the MF level corresponds to the normal high level, the MLM to the normal low level, and the MELM to a drought-year low. These levels were derived from various sources, including technical publications, topographic maps, Water Resource Data Reports of the USGS, and other studies. Field investigations are also used to determine past surface levels from water marks, wetland vegetation, dry land vegetation, and to establish the elevation of septic tanks, docks, sea walls, roads and floor slabs.

During a normal year, each of the indicator lakes should reach both the designated normal high (MF) and the normal low (MLM) levels. In addition, it is generally beneficial for lakes to reach the adopted drought year low (MELM) level every four to six years for a short period of time for the biological health of the lake. In this report, hydrographs of representative lakes compare current and recent water levels against "normal ranges" defined by the adopted MF and MLM levels.

Of the 76 lakes presented in this report, 17 have water-control structures. These structures are used for water conservation and do not generally influence the water levels with regard to meteorologically wet or dry conditions. During periods of extreme high water, the structures may be operated to minimize flooding.

During November, 66 of the 76 lakes monitored for this report recorded water level decreases, while 7 recorded increases and two remained unchanged, compared to last month. Data was missing for Turkey Ford Lakes located in the Tampa Bay region. Average water levels decreased in the Northern, Tampa Bay Polk Uplands and Lake Wales Ridge regions by 0.08, 0.13, 0.19 and 0.30 foot, respectively. District-wide, average water levels decreased by 0.16 foot, compared to last month.

In November, 57 of the 76 lakes monitored for this report recorded water level increases, 17 recorded decreases and two were the same as last year, compared to last year's levels. In the Northern, Tampa Bay, Polk Upland and Lake Wales Ridge regions, average lake levels were higher by 0.38, 0.20, 0.61 and 0.06 foot, respectively. District-wide, average lake levels were higher by 0.32 foot, compared to last year's levels.

Water levels in 68 of the 76 lakes were above the base of the annual normal range. Lake levels in the Northern, Tampa Bay, Polk Uplands and Lake Wales Ridge regions averaged 0.37 foot, 1.21 feet, 2.20 feet and 0.10 foot, respectively, above the base of the annual normal range. District-wide, lake levels averaged 1.16 feet above the base of the annual normal range. Water levels in 72 of the 76 lakes were above the drought year levels.

SUMMARY OF LAKE ELEVATIONS OF REGIONAL LAKES (feet)

NORTHERN LA	KES					Change	Change	Diff	(MELM)	(MLM)	(MF)	Period		Period	
Lake Name	County	Beginning of Record	OCT 2019	NOV 2019	NOV 2018	from OCT 2019	from NOV 2018	from MELM	Drought Year Low	Normal Year Low	Normal Year High	of Record Low	Record Low Date	of Record High	Record High Date
Big Fish Lake	Pasco	1980	74.11	73.79	74.75	-0.32	-0.96	2.04	71.75	73.05	76.05	65.45	JUN 1997	77.40	SEP 2004
Crews Lake	Pasco	1986	52.46	52.10	52.10	-0.36	0.00	2.10	50.00	52.00	55.00	42.63	APR 2001	54.92	MAR 1998
Hancock Lake	Pasco	1978	101.50	101.28	101.58	-0.22	-0.30	-0.72	102.00	104.00	106.50	90.00	MAR 2009	108.90	MAR 1998
Hunters Lake	Hernando	1965	19.99	19.81	17.61	-0.18	2.20	3.81	16.00	17.50	20.50	11.70	JUN 2001	20.50	MAR 1970
Lake Iola	Pasco	1965	141.27	141.03	140.00	-0.24	1.03	-1.47	142.50	145.00	147.50	128.96	MAY 2012	148.70	JAN 1989
Lake Lindsey	Hernando	1982	65.99	65.87	65.81	-0.12	0.06	1.37	64.50	66.00	69.00	59.38	MAY 2012	69.47	MAR 1998
Little Lake (Consu	Citrus	1985	39.37	39.16	38.99	-0.21	0.17	1.91	37.25	39.00	41.50	31.10	MAY 2001	42.84	SEP 2004
Lake Miona	Sumter	1978	54.58	55.35	53.09	0.77	2.26	4.35	51.00	53.00	55.00	47.88	AUG 1992	56.60	OCT 1982
Moon Lake	Pasco	1990	39.06	39.90	39.79	0.84	0.11	4.40	35.50	37.50	40.50	32.98	APR 2009	41.26	SEP 2004
Lake Panasoffkee	Sumter	1955	40.36	40.30	39.71	-0.06	0.59	1.80	38.50	39.50	42.50	36.92	JUN 2007	44.28	APR 1960
Lake Pasadena	Pasco	1984	92.67	92.45	91.85	-0.22	0.60	2.45	90.00	91.50	94.50	81.56	MAY 2001	94.86	OCT 2004
Spring Lake	Hernando	1965	180.89	180.73	180.89	-0.16	-0.16	2.48	178.25	181.25	184.25	174.85	JUN 1965	183.57	OCT 1984
Floral City Pool	Citrus	1957	40.93	40.71	40.72	-0.22	-0.01	2.46	38.25	40.25	42.50	30.35	JUN 2001	44.22	MAR 1960
Inverness Pool	Citrus	1958	39.65	39.41	39.36	-0.24	0.05	3.16	36.25	38.25	40.50	31.46	MAY 2001	42.94	APR 1960
Hernando Pool	Citrus	1958	38.44	38.21	38.16	-0.23	0.05	3.46	34.75	36.75	39.00	31.09	JUL 2001	41.74	APR 1960

TAMPA BAY LA	AKES					Change	Change	Diff	(MELM)	(MLM)	(MF)	Period		Period	
Lake Name	County	Beginning of Record	OCT 2019	NOV 2019	NOV 2018	from OCT 2019	from NOV 2018	from MELM	Drought Year Low	Normal Year Low	Normal Year High	of Record Low	Record Low Date	of Record High	Record High Date
Lake Alice	Hillsborough	1971	40.97	40.69	40.41	-0.28	0.28	3.19	37.50	40.25	42.25	33.24	MAY 2002	42.42	SEP 2004
Lake Ann-Parker	Pasco	1969	47.44	47.30	47.04	-0.14	0.26	2.30	45.00	45.75	48.75	43.28	JUN 2002	49.29	SEP 1979
Bay Lake	Hillsborough	1982	45.30	45.04	45.27	-0.26	-0.23	2.54	42.50	44.00	46.75	41.86	APR 1985	46.46	DEC 1997
Lake Brant	Hillsborough	1971	58.09	57.80	57.51	-0.29	0.29	3.30	54.50	56.50	58.75	51.65	JUN 1994	60.04	AUG 1979
Brooker Lake	Hillsborough	1977	62.83	62.62	62.42	-0.21	0.20	3.62	59.00	61.00	64.25	56.49	MAY 2002	64.08	DEC 1997
Calm Lake	Hillsborough	1965	50.22	49.95	49.55	-0.27	0.40	4.95	45.00	47.50	50.50	41.88	JUN 2002	51.04	JUL 2015
Camp Lake	Pasco	1968	62.30	62.08	61.88	-0.22	0.20	3.08	59.00	61.75	64.00	50.82	MAY 2002	64.05	JUL 2015
Carlton Lake	Hillsborough	1976	93.61	93.61	92.00	0.00	1.61	5.61	88.00	90.50	93.50	86.82	MAY 2001	94.60	FEB 1998
Lake Carroll	Hillsborough	1985	36.87	36.55	36.01	-0.32	0.54	4.05	32.50	34.50	37.00	30.87	MAY 2002	38.06	DEC 1997
Church Lake	Hillsborough	1931	34.70	35.40	35.27	0.70	0.13	3.90	31.50	34.00	36.25	27.94	MAY 2002	38.60	FEB 1936
Lake Cooper	Hillsborough	1946	60.23	59.88	59.67	-0.35	0.21	2.88	57.00	59.75	61.75	55.60	JUN 2001	62.54	SEP 1947
Crescent Lake	Hillsborough	1981	42.08	41.97	41.86	-0.11	0.11	3.47	38.50	40.00	42.50	35.34	JUN 2001	42.89	SEP 2017
Deer Lake	Hillsborough	1977	66.58	66.29	65.98	-0.29	0.31	3.79	62.50	64.50	67.25	60.72	MAY 2002	67.42	DEC 1997
Egypt Lake	Hillsborough	1978	36.68	36.40	36.16	-0.28	0.24	3.90	32.50	35.00	37.50	33.06	MAY 2000	38.15	SEP 1985
Gornto Lake	Hillsborough	1979	38.17	37.48	37.62	-0.69	-0.14	3.48	34.00	36.00	38.50	29.86	MAR 1979	39.48	FEB 1998
Lake Harvey	Hillsborough	1970	61.03	60.73	60.56	-0.30	0.17	2.73	58.00	60.25	62.50	53.94	MAY 2002	63.90	DEC 1997
Lake Hiawatha	Hillsborough	1981	49.52	50.09	49.90	0.57	0.19	5.09	45.00	48.00	50.50	46.14	JUN 2000	51.16	JUL 2019
Horse Lake	Hillsborough	1930	46.62	46.14	46.39	-0.48	-0.25	4.14	42.00	44.00	46.50	36.33	JUN 2002	50.00	AUG 1959
Lake Keene	Hillsborough	1948	62.42	62.35	62.25	-0.07	0.10	3.35	59.00	60.50	63.00	56.92	MAY 1994	63.69	SEP 2017
Keystone Lake	Hillsborough	1984	40.98	40.91	41.42	-0.07	-0.51	1.91	39.00	39.75	42.00	37.89	JUN 1994	43.64	AUG 2015
King Lake	Pasco	1983	103.56	103.30	102.56	-0.26	0.74	3.30	100.00	102.50	105.25	94.20	APR 2009	104.80	MAR 1987
Lake Leclare	Hillsborough	1977	51.32	51.04	51.04	-0.28	0.00	4.04	47.00	49.50	52.00	44.95	JUN 2001	52.99	JUL 2015
Lake Linda	Pasco	1969	65.57	65.42	65.09	-0.15	0.33	3.42	62.00	64.00	66.75	60.07	MAY 2001	67.17	SEP 2017
Little Lake	Hillsborough	1931	44.61	45.15	45.23	0.54	-0.08	3.15	42.00	43.50	46.50	38.06	JUN 1994	48.65	AUG 1960
Long Pond	Hillsborough	1978 1978	45.73 112.83	45.50 112.83	45.94 112.79	-0.23 0.00	-0.44 0.04	3.50 2.33	42.00 110.50	44.00 112.50	46.50 115.00	36.33 111.45	MAY 1979 MAY 2017	48.27 114.42	SEP 1998 MAR 1978
Mud (Walden) Lake	Hillsborough														
Lake Padgett Platt Lake	Pasco Hillsborough	1965 1946	69.59 49.74	69.35 49.44	69.00 49.00	-0.24 -0.30	0.35 0.44	1.85 3.44	67.50 46.00	69.00 47.75	71.25 50.50	66.27 42.53	JUN 2001 JUN 2001	71.90 51.88	SEP 1988 SEP 1979
		1940	38.36	39.28	39.17	0.92	0.44	4.28	35.00	47.75 37.50	40.50	42.53 29.82	JUN 2001 JUN 2002	40.95	
Rainbow Lake	Hillsborough			39.28 60.63			-0.11 -0.07	4.28 2.63	58.00					40.95 62.30	JUL 2015
Lake Stemper	Hillsborough	1946 1971	60.93 62.98	62.68	60.70 62.49	-0.30	0.19	3.43	59.25	59.50 61.25	62.00	53.36 56.48	JUN 2001 JUN 2002	64.48	MAR 1960 SEP 1979
Lake Thomas	Hillsborough	1971	62.98 M	52.68 50.71	50.56	-0.30 M	0.19	3.43 0.71	59.25 50.00	51.25 51.50	63.50 54.00	48.07	JUN 2002 JUN 1985	55.28	SEP 1979 SEP 1988
Turkey Ford Lake Lake Wimauma	Hillsborough Hillsborough	1970	80.46	80.18	50.56 79.33	-0.28	0.15 0.85	-0.82	81.00	83.00	86.75	48.07 70.12	MAY 2001	55.28 84.38	MAR 1998
Lake Williaullia	Hillsboroagn	1900	00.40	00.10	19.33	-0.20	0.05	-0.02	01.00	03.00	00./3	/0.12	IVIAY ZUUT	04.30	WAK 1998

NOTE: M='no data' or 'not determined'


SUMMARY OF LAKE ELEVATIONS OF REGIONAL LAKES (feet)

Lake Name	County	Beginning of Record	OCT 2019	NOV 2019	NOV 2018	Change from OCT 2019	Change from NOV 2018	Diff from MELM	(MELM) Drought Year Low	(MLM) Normal Year Low	(MF) Normal Year High	Period of Record Low	Record Low Date	Period of Record High	Record High Date
Lake Alfred	Polk	1961	131.64	131.58	129.61	-0.06	1.97	5.33	126.25	128.25	130.75	122.40	MAY 1977	132.76	MAR 1998
Lake Ariana	Polk	1945	136.78	136.61	136.40	-0.17	0.21	4.11	132.50	134.50	137.00	131.28	MAY 1976	137.90	AUG 1946
Lake Arietta	Polk	1970	142.49	142.30	142.15	-0.19	0.15	4.30	138.00	141.00	144.00	136.50	MAY 1977	144.12	SEP 2004
Blue Lake South	Polk	1986	115.31	115.01	113.01	-0.30	2.00	2.51	112.50	114.00	117.00	103.38	FEB 1991	119.19	DEC 2005
Lake Bonny	Polk	1954	130.98	130.89	129.78	-0.09	1.11	4.89	126.00	128.00	130.50	122.34	MAY 2009	133.08	SEP 2004
Lake Buffum	Polk	1972	131.85	131.72	131.88	-0.13	-0.16	4.97	126.75	129.25	132.25	123.90	JUN 1991	133.00	JUN 2005
Clearwater Lake	Polk	1979	144.22	143.90	143.34	-0.32	0.56	4.90	139.00	141.00	143.50	137.93	MAY 2001	146.06	AUG 1984
Lake Conine	Polk	1989	128.67	128.50	128.35	-0.17	0.15	4.00	124.50	126.50	128.75	123.83	NOV 2009	129.95	SEP 2004
Eagle Lake	Polk	1965	130.13	129.84	129.29	-0.29	0.55	3.34	126.50	128.50	130.75	118.76	MAY 1976	131.50	SEP 1996
Lake Fannie	Polk	1967	125.48	125.63	124.89	0.15	0.74	5.63	120.00	123.50	125.75	118.67	MAY 1977	127.51	SEP 2004
Lake Garfield	Polk	1969	102.00	101.79	102.11	-0.21	-0.32	1.79	100.00	101.00	104.75	97.38	JUN 2001	105.91	SEP 1979
Lake Hamilton	Polk	1945	121.31	121.19	120.46	-0.12	0.73	3.94	117.25	119.00	121.50	116.61	JUN 2001	124.34	OCT 1948
Lake Helene	Polk	1961	146.44	146.22	145.29	-0.12	0.93	7.22	139.00	141.00	144.00	134.06	JUN 2008	146.71	OCT 2017
Lake Howard	Polk	1987	132.10	131.73	131.31	-0.37	0.42	4.73	127.00	129.50	132.00	127.69	MAY 2001	133.08	SEP 2004
Lake Juliana	Polk	1961	133.49	133.30	132.45	-0.19	0.85	5.80	127.50	130.00	132.50	126.20	MAY 1976	134.10	MAR 1998
Lake Mcleod	Polk	1965	130.75	130.18	129.58	-0.57	0.60	2.18	128.00	129.50	132.00	115.11	MAY 1976	131.98	SEP 1998
Lake Otis	Polk	1954	127.66	127.53	126.84	-0.13	0.69	4.53	123.00	125.00	128.00	119.58	MAY 1976	129.12	SEP 1960
Lake Ruby	Polk	1971	125.11	124.90	124.75	-0.13	0.15	3.90	121.00	123.00	125.25	117.41	MAY 1976	125.98	SEP 2004
Lake Gibson	Polk	1969	143.09	142.98	142.70	-0.11	0.13	1.48	141.50	141.50	143.50	140.21	MAY 2009	145.40	SEP 1988

LK WALES F	RIDGE LAKES					Change	Change	Diff	(MELM)	(MLM)	(MF)	Period		Period	
Lake Name	County	Beginning of Record	OCT 2019	NOV 2019	NOV 2018	from OCT 2019	from NOV 2018	from MELM	Drought Year Low	Normal Year Low	Normal Year High	of Record Low	Record Low Date	of Record High	Record High Date
Lake Annie	Polk	1970	116.55	116.37	115.57	-0.18	0.80	2.37	114.00	116.00	119.00	108.36	JUN 1990	117.56	OCT 2005
Lake Clay	Highlands	1983	77.87	77.63	77.41	-0.24	0.22	2.63	75.00	76.00	78.75	74.34	MAY 2001	78.82	JUN 2013
Crooked Lake	Polk	1945	121.23	120.75	119.01	-0.48	1.74	3.75	117.00	118.50	122.00	106.10	MAY 1991	123.98	OCT 1948
Lake Jackson	Highlands	1945	102.47	102.07	101.93	-0.40	0.14	4.07	98.00	100.00	103.00	96.47	JUN 2008	103.76	SEP 1947
Lake Letta	Highlands	1951	98.13	97.89	98.24	-0.24	-0.35	2.89	95.00	97.00	100.00	90.27	JUN 2008	101.38	OCT 1953
Lake Lotela	Highlands	1950	105.68	105.38	106.42	-0.30	-1.04	1.38	104.00	105.00	108.50	96.63	JUN 2008	109.38	JUL 1954
Lake Placid	Highlands	1984	92.04	91.66	92.26	-0.38	-0.60	1.66	90.00	91.50	94.50	88.08	JUN 2008	94.24	SEP 2003
Starr Lake	Poľk	1983	105.56	105.45	103.94	-0.11	1.51	-2.55	108.00	110.00	113.00	96.23	JUL 2001	109.80	DEC 2005
Trout Lake	Highlands	1981	96.05	95.68	97.58	-0.37	-1.90	0.68	95.00	98.00	101.00	87.15	MAY 2001	99.89	SEP 2016


NOTE: M='no data' or 'not determined'

HYDROGRAPHS OF REGIONAL LAKES 15-yr Period of Record

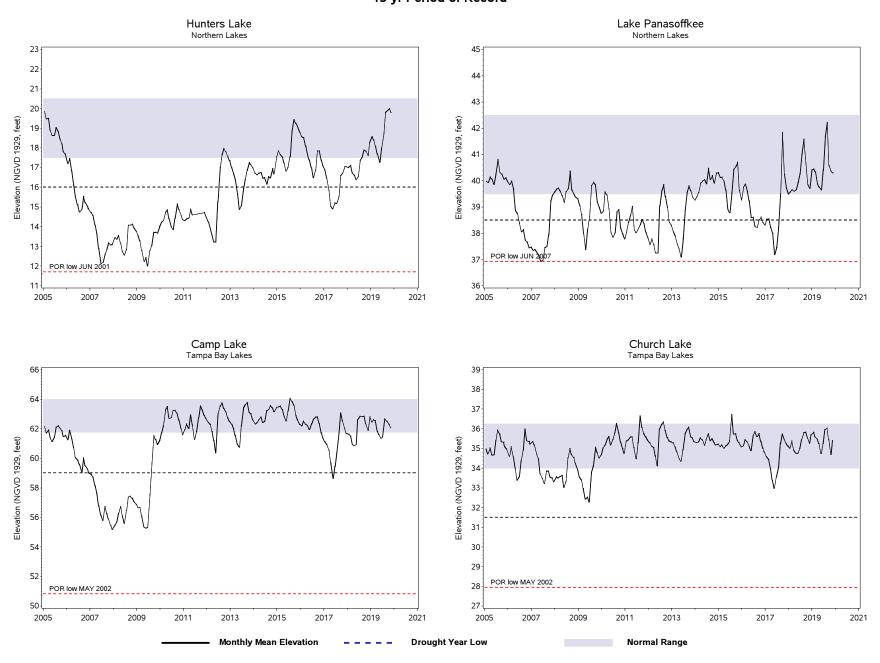


HYDROGRAPHS OF REGIONAL LAKES

15-yr Period of Record

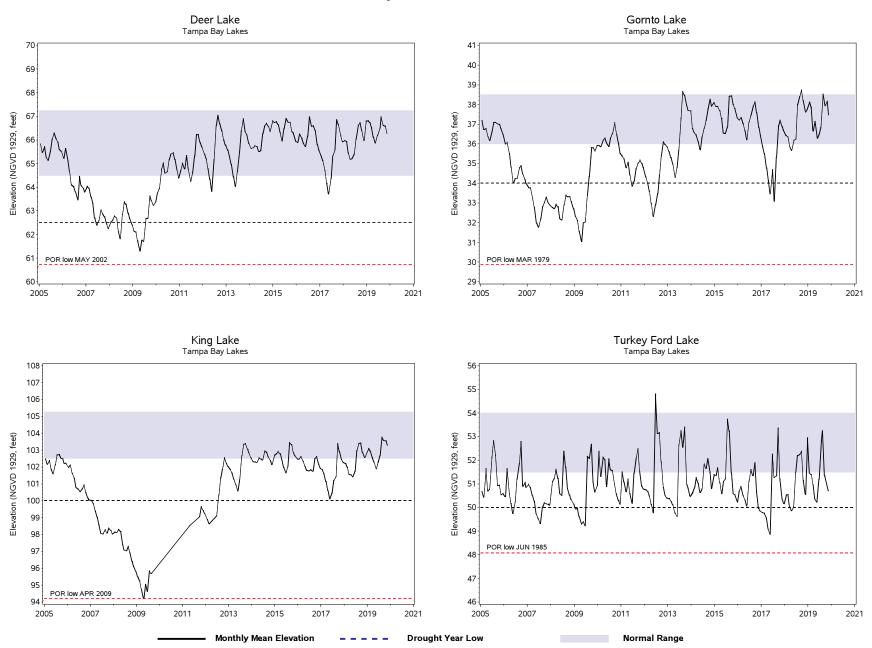


HYDROGRAPHS OF REGIONAL LAKES 15-yr Period of Record

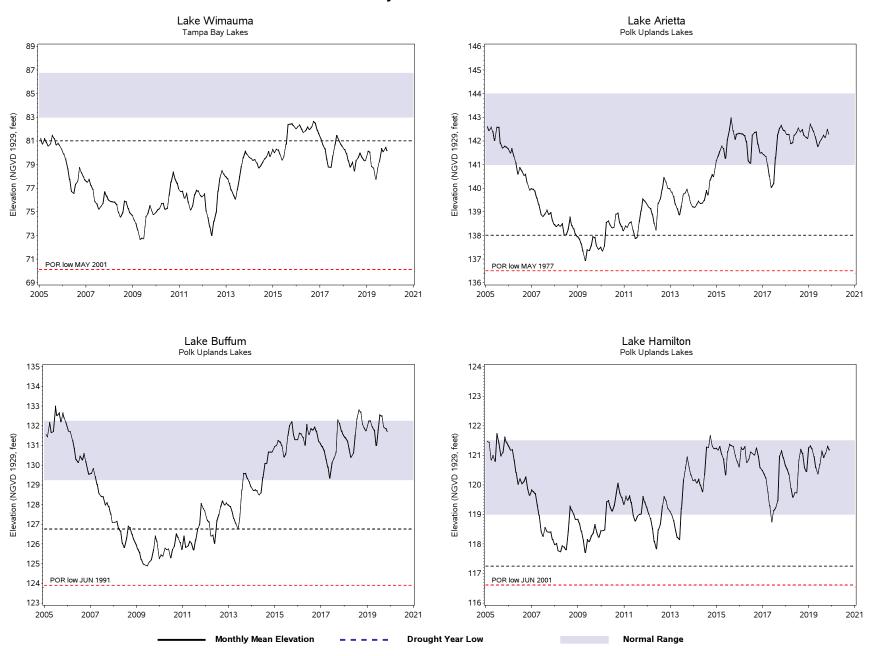

HYDROGRAPHS OF REGIONAL LAKES

15-yr Period of Record

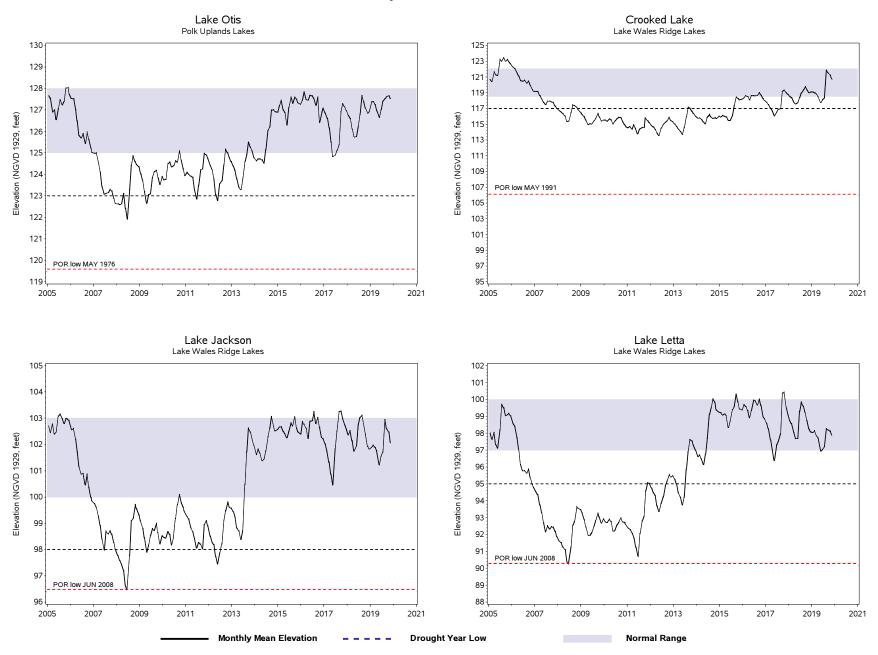

Streams

The District processes streamflow data collected by the U.S. Geological Survey (USGS) under a cooperatively funded program between the District and the USGS. Streamflow is recorded daily as water elevations at 12 gauging stations in three regions of the District (see index map in the Appendix). The USGS uses rating curves developed from water level elevations to calculate streamflow discharge in units of cubic feet per second (cfs). For this report, the reported streamflow values are the means of the daily discharge volumes for the current month. The period-of-record high and low values correspond to monthly means and not to peak events. Percentile values are calculated from the monthly means for the period of record, for each station. The percentile is the monthly mean statistically ranked on a scale of zero to 100 that indicates the percent of the period-of-record monthly means that are at or above the present monthly mean. The current year's data are provisional and are subject to revision. Revised data are used for all calculations, as they become available.

Hydrographs are produced for each of the stream stations. Current monthly means for each station are compared to respective 25th and 75th percentiles of the period-of-record monthly means.

During November, 10 of the 12 stations monitored for this report had decreased streamflow, compared to last month. Total streamflow increased in the northern region of the District by 3.0 cfs (1.9 mgd), while flow decreased in the central and southern regions by 462.2 cfs (298.6 mgd) and 295.9 cfs (1191.2 mgd), respectively. District-wide, total streamflow decreased by an average of 755.1 cfs (487.8 mgd).


In November, 11 of the 12 stations recorded higher streamflow than in November 2018. Streamflow was higher in the northern, central and southern regions by 282.5 cfs (182.5 mgd), 331.3 cfs (214.0 mgd) and 183.7 cfs (118.7), respectively. District-wide, total streamflow was higher, on average, by 797.5 cfs (515.2 mgd), than the November 2018 average.

Compared to historical November discharge values, Withlacoochee River streamflow, measured at the Trilby station and the Holder station averaged in the 82nd and 60th percentiles, respectively. Streamflow measured at the stations on the Anclote, Pithlachascotee and Hillsborough Rivers averaged in the 79th, 89th and 84th percentiles of respective historical November readings. Streamflow measured at the Alafia River, Little Manatee River and Peace River at Bartow stations averaged in the 67th, 87th and 77th percentiles of respective historical November readings. Additionally, streamflow measured at the Josephine Creek, Manatee River, Myakka River and Peace River at Arcadia stations averaged in the 35th, 66th, 65th and 67th percentiles of respective historical November readings.


SUMMARY OF STREAM DISCHARGE FROM MAJOR STREAMS (CFS), NOVEMBER 2019

NORTHERN COUNTIES	Beginning	Mean	Mean	Mean	Change	Change	NOV 2019	Period of	Record	Period of	Record
	Year of	Discharge	Discharge	Discharge	from	from	Percentile	Record	Low	Record	High
	Record	NOV 2019	OCT 2019	NOV 2018	OCT 2019	NOV 2018	Rank	Low	Date	High	Date
Withlacoochee R at Trilby Withlacoochee R near Holder	1928	362.6	239.4	76.8	123.2	285.8	82%	0.1	JUN2000	8840	JUN1934
	1928	955.0	952.0	672.5	3.0	282.5	60%	33.0	MAR2001	8660	APR1960
CENTRAL COUNTIES											
Anclote River near Elfers Pithlachascotee R near New Hillsborough R near Zephyrh Alafia River at Lithia Little Manatee R near Wimau Peace River at Bartow	1946 1963 1939 1932 1939	26.8 14.5 178.4 190.4 114.6 205.9	30.5 16.5 239.0 371.0 273.1 262.7	8.8 3.1 96.6 174.1 57.3 59.4	-3.7 -2.0 -60.6 -180.6 -158.5 -56.8	18.0 11.4 81.8 16.3 57.3 146.5	79% 89% 84% 67% 87% 77%	0.8 0.0 27.0 4.1 0.9 0.0	MAY1962 MAY2013 MAY2001 JUN2000 DEC1976 MAY2009	3710 2180 12300 40800 11100 4100	JUL1960 JUN2012 MAR1960 SEP1933 SEP1960 SEP1947
SOUTHERN COUNTIES											
Josephine Cr near DeSoto Ci	1946	26.7	37.9	24.6	-11.2	2.1	35%	0.5	MAY1956	1680	SEP1948
Manatee River near Myakka H	1966	18.5	78.6	22.1	-60.1	-3.6	66%	0.1	MAY1975	6440	JUN2003
Myakka River near Sarasota	1936	109.5	147.2	46.0	-37.7	63.5	65%	0.0	JUN2012	10800	JUN2003
Peace River at Arcadia	1931	531.4	718.3	409.7	-186.9	121.7	67%	5.6	MAY2000	34700	SEP1933


HYDROGRAPHS OF MAJOR STREAMS JANUARY 2015 TO NOVEMBER 2019

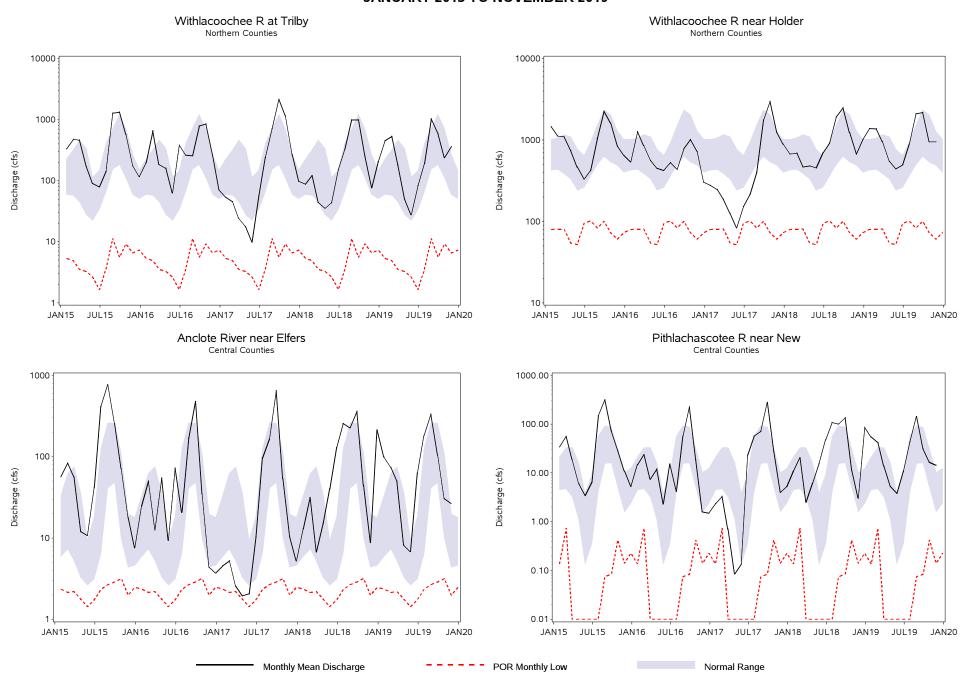

HYDROGRAPHS OF MAJOR STREAMS JANUARY 2015 TO NOVEMBER 2019

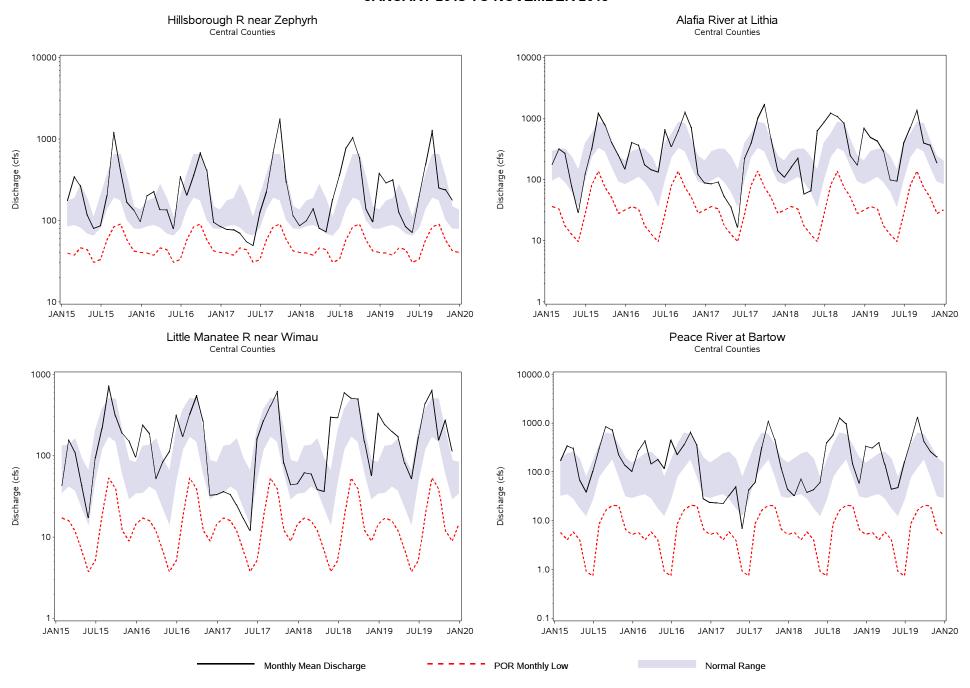

HYDROGRAPHS OF MAJOR STREAMS JANUARY 2015 TO NOVEMBER 2019

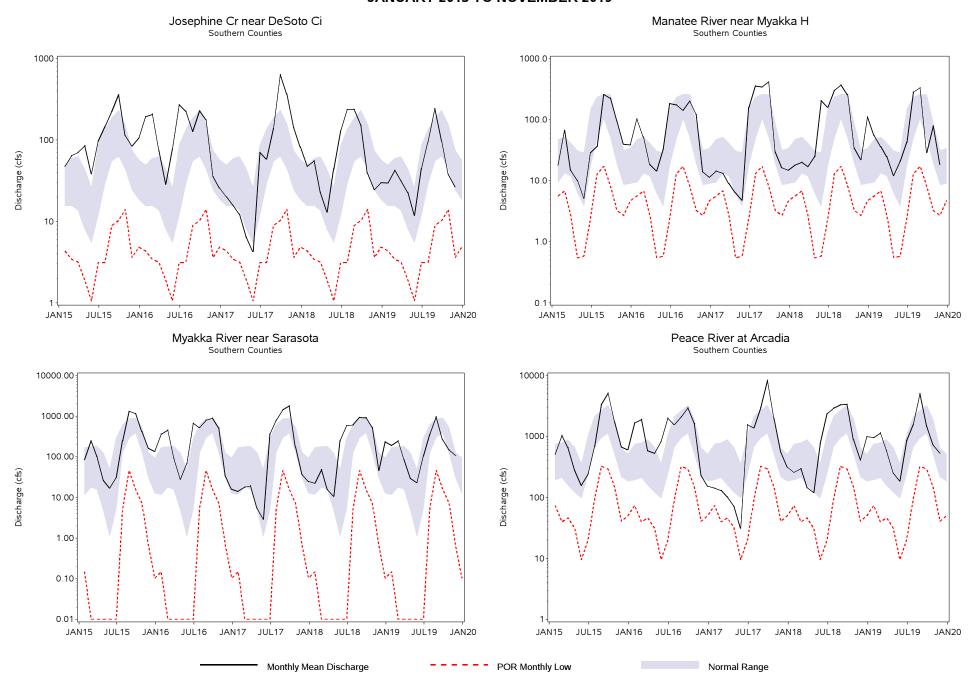

Springs

The District processes springflow data collected by Tampa Bay Water through a mutual agreement and by the U.S. Geological Survey (USGS) under a cooperatively funded program between the District and the USGS. Springflow is monitored at six gauging stations in two regions of the District (see index map in the Appendix). Springflow data for Rainbow, Silver and Sulphur Springs are recorded as daily water levels. The USGS uses rating curves developed for these springs from historical water level elevations to calculate springflow discharge in units of cubic feet per second (cfs). Weeki Wachee Springs discharge (cfs) is provided as an instantaneous reading calculated by the USGS. Buckhorn and Lithia Springs discharge is obtained from Tampa Bay Water biweekly and weekly, respectively. Period-of-record high and low values correspond to monthly theoretical means and not to peak events. Values are reported as percentiles calculated from an analysis of historical monthly means recorded during a given month. The percentile is the monthly mean ranked on a scale of zero to 100 that indicates the percent of period-of-record values that are above, equal to or below the median (50th percentile) for the current month. The values reported are provisional and are subject to revision at the end of the water year. Revised USGS springflow data are loaded into the District's WMIS when they become available.

Hydrographs are produced for the seven-springflow stations, and current values are compared to respective 25th and 75th percentiles that are calculated from historical data. The 25th and 75th percentiles are calculated using the SASTM software system for data analysis using period-of-record monthly theoretical means for each springflow station analyzed.

During November, five of the six stations reported decreased springflow, compared to the previous month. Total springflow decreased in the northern and central regions by 84.3 cfs (54.5 mgd) and 3.8 cfs (2.4 mgd), respectively. District-wide, springflow decreased by 88.1 cfs (56.9 mgd).


In November, total springflow recorded at four of the six stations was below last year's levels. Total springflow for the northern region was lower by 145.0 cfs (92.3 mgd), while flow for the central region was higher by 7.3 cfs (4.6 mgd). District-wide, springflow was lower by 137.7 cfs (87.7 mgd), compared to November 2018 rates.

Compared to historical period-of-record values for November, total springflow measured in Rainbow, Silver and Weeki Wachee Springs, in the northern region, was in the 60th, 36th and 89th percentiles of respective historical readings. Springflow measured in Sulphur and Buckhorn and Lithia Springs, in the central region, was in the 40th, 59th and 83rd percentiles, respectively, of historical November readings.

SUMMARY OF SPRINGS DISCHARGE FROM MAJOR SPRINGS (CFS), NOVEMBER 2019


NORTHERN COUNTIES	NOV 2019 Discharge	OCT 2019 Discharge	NOV 2018 Discharge	Change From OCT 2019	Change From NOV 2018	NOV 2019 Percentile Rank	Period of Record Low	Record Low Date	Period of Record High	Record High Date
Rainbow Springs Silver Springs	725.3 708.1	780.5 722.5	824.2 767.2	-55.2 -14.4	-98.9 -59.1	60% 36%	391.0 141.0	MAY2012 JUN2012	1060.0 1290.0	SEP1988 OCT1960
Weeki Wachee Springs	206.8	221.5	193.8	-14.7	13.0	89%	101.0	JUN1994	257.0	OCT2004
CENTRAL COUNTIES										
Sulphur Springs Buckhorn Springs Lithia Springs	31.9 12.3 56.0	34.8 11.5 57.7	21.7 13.3 57.9	-2.9 0.8 -1.7	10.2 -1.0 -1.9	40% 59% 83%	0.0 2.2 6.2	JUN1994 MAY2006 OCT2012	145.0 32.7 91.5	MAR1960 AUG2004 NOV2004

HYDROGRAPHS OF REGIONAL SPRINGS JANUARY 2015 TO NOVEMBER 2019

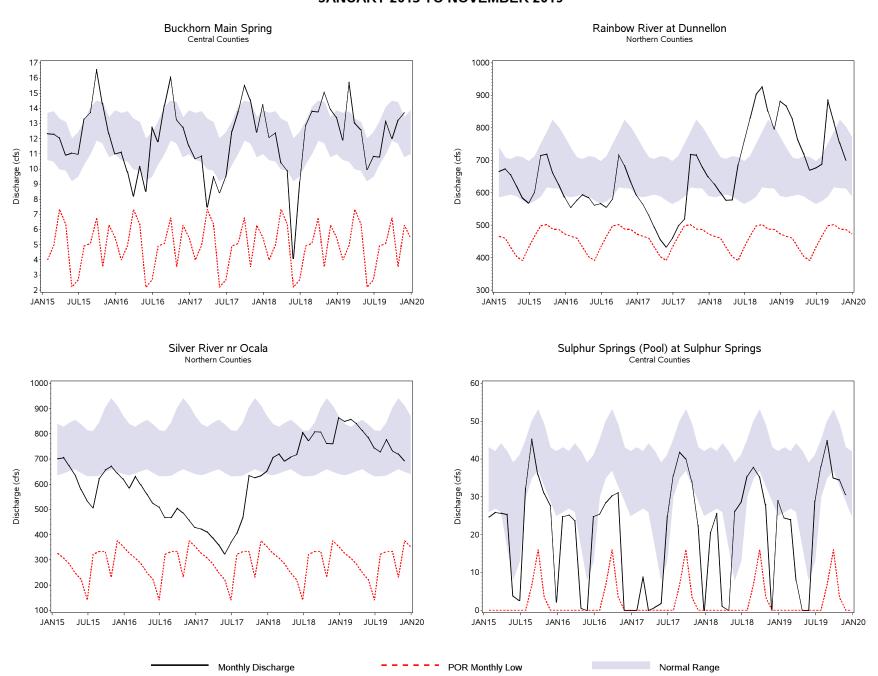


HYDROGRAPHS OF REGIONAL SPRINGS JANUARY 2015 TO NOVEMBER 2019



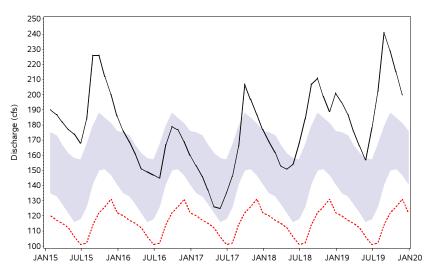

Lithia Springs Central Counties

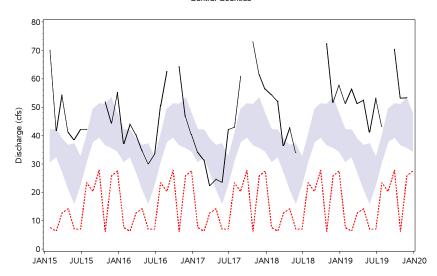

GROUND WATER

The ground-water section of this report provides ground-water level information within the District based on geographically delineated areas (regions) within the District. For this report, the District has been divided into three geographical regions that are defined by county boundaries (see index maps in the Appendix). Each regional area includes all or part of each county that is located within that region and that is also within the District's jurisdictional boundaries. The northern region includes the counties of Citrus, Hernando, Lake, Levy, Marion and Sumter, where the Floridan aquifer is generally unconfined and at or near land surface, allowing rainfall to easily recharge (replenish) the aquifer system. The central region includes the counties of Hillsborough, Pasco, Pinellas and Polk, where the Floridan aquifer can be unconfined, semi-confined or confined (overlain by thick clays). Where the Floridan aquifer is confined, recharge to the aquifer from rainfall is low. The southern region includes the counties of Charlotte, DeSoto, Hardee, Highlands, Manatee and Sarasota, where the Floridan aquifer is confined.

Twelve surficial aquifer (shallow, non-artesian) monitor wells and 82 intermediate and Floridan aquifer (deep) monitor wells are measured for this report to determine the relative health of ground-water levels District-wide. Only monitor wells with an adequate and reliable period-of-record water level measurements were selected for the network. For each well, the 25th and 75th percentiles ("low normal" and "high normal," respectively) were calculated for each week of the year using the period-of-record data. The 25th and 75th percentiles are used to represent the lower and upper limits of the normal range, as they are considered a reliable and robust measure of the normal range and are less affected by extremes in the data record. The end-of month water-level readings measured for this report are compared to their corresponding normal ranges. Trend data from 16 intermediate and Floridan aquifer wells are shown in hydrographs to compare current water levels to the low normal and high normal levels.

Data from these wells are further compiled into regional statistics for the three regions of the District. Wells in the northern counties are unconfined and non-artesian, while those in the southern counties are confined and artesian. Wells included in the central counties vary between confined and unconfined conditions due to the transitional nature of geology in this area. The potentiometric levels of representative Floridan aquifer wells are used to produce the potentiometric surface maps presented in this report.

Surficial Aquifer

In November, monthly analysis indicates that all 12 surficial aquifer wells recorded water level decreases, compared to last month. Regionally, average surficial aquifer water levels increased in the northern, central and southern regions by 0.55, 0.31 and 0.79 foot, respectively. District-wide, average surficial aquifer water levels decreased by 0.47 foot.

During November, annual analysis indicates average water levels in 8 of the 12 surficial aquifer wells were higher than November 2018 levels. Average surficial aquifer water levels were higher in the northern and central regions by 0.67 and 0.24 foot, respectively, while levels were lower in the southern region by 0.80 foot. District-wide, average water levels in surficial wells were 0.05 foot higher than November 2018 levels.

For November, water levels were above the low normal level in 11 of the 12 surficial wells. Average surficial aquifer water levels in the northern, central and southern regions were 2.31 feet, 1.59 feet and 0.25 foot, respectively, above the low normal level. District-wide, the average water level in surficial wells was 1.37 feet above the low normal level.

SUMMARY OF SURFICIAL AQUIFER LEVELS IN REPRESENTATIVE WELLS, NOVEMBER 2019

NORTHERN COUNTIES	NOV 2019 Elev	OCT 2019 Elev	NOV 2018 Elev	Change From OCT 2019	Change From NOV 2018	NOV Historical Low Normal	NOV Historical High Normal	Departure From Low Normal	Period of Record Low	Record Low Date	Period of Record High	Record High Date
Green Swamp	91.47	92.00	90.75	-0.53	0.72	89.66	91.11	1.81	82.95	MAY2000	92.90	SEP2004
Lecanto 2	10.41	10.98	9.78	-0.57	0.63	7.61	9.75	2.80	5.76	MAY2001	13.04	AUG2003
CENTRAL COUNTIES												
Loughman Lutz-Lake Fern ROMP 50 Shallow SR 33 & Combee Road SR 577 Shallow Tarpon Road Shallow USGS P-48	92.50	92.72	91.72	-0.22	0.79	91.21	92.53	1.29	88.40	JUN2001	96.31	SEP2017
	57.04	57.33	56.89	-0.29	0.15	56.33	57.14	0.71	52.64	NOV2009	60.81	OCT1983
	41.96	42.22	41.77	-0.26	0.18	41.25	41.73	0.71	38.01	OCT2010	44.05	SEP2001
	135.80	136.01	135.51	-0.20	0.29	132.74	134.14	3.06	129.16	FEB2001	136.81	AUG1995
	123.39	123.89	122.88	-0.50	0.51	120.96	123.77	2.43	109.99	JAN2000	129.26	SEP2013
	12.95	13.45	11.81	-0.50	1.14	11.10	12.55	1.85	9.22	MAY2017	17.25	AUG2015
	101.05	101.26	102.43	-0.21	-1.38	100.00	101.63	1.05	96.07	JUN2001	105.84	SEP2017
SOUTHERN COUNTIES												
Edgeville 4 Shallow	66.51	67.90	67.35	-1.39	-0.84	66.65	67.73	-0.14	63.76	MAY2012	69.85	JUL2018
ROMP 26 Shallow	68.89	69.28	70.14	-0.39	-1.25	68.75	70.45	0.14	64.32	JUN1999	75.30	SEP2017
SR 74	15.72	16.31	16.02	-0.59	-0.30	14.97	15.92	0.75	12.66	MAY2000	18.78	AUG2013

Intermediate and Floridan Aquifers

In November, monthly analysis indicates that 67 of the 82 intermediate and Floridan aquifer wells monitored for this report recorded water level decreases, compared to last month. Regionally, average water levels decreased in the northern, central and southern regions by 0.66, 0.06 and 0.38 foot, respectively. District-wide, the average water level in the intermediate and Floridan aquifer decreased by 0.32 foot.

During November, annual analysis indicates that 50 of the 82 intermediate and Floridan aquifer wells monitored for this report recorded water level increases, compared to levels measured in November 2018. Regionally, the mean water level in the northern and central regions were higher by 0.76 and 0.53 foot, respectively, while levels in the southern region was lower by 0.82 foot, compared to last year's levels. District-wide, average water levels in intermediate and Floridan aquifer wells were 0.09 foot higher than November 2018 levels.

For November, 77 of the 82 intermediate and Floridan aquifer wells had levels above the low normal level, compared to historical monthly levels. Average water levels in the northern, central and southern regions were 3.69, 5.61 and 2.41 feet, respectively, above the low normal level. District-wide, the average water level in intermediate and Floridan aquifer wells was 3.97 feet above the low normal level.

SUMMARY OF INTERMEDIATE AND FLORIDAN AQUIFER LEVELS IN REPRESENTATIVE WELLS, NOVEMBER 2019

Regional Summary:

Region	NOV 2019 Mean Elevation	NOV 2019 Relation to POR Median	NOV 2019 Relation to 25th Percentile	NOV 2019 Mean Percentile Rank	OCT 2019 Mean Percentile Rank	NOV 2018 Mean Percentile Rank
Northern Counties	40.25	2.22	3.67	84%	83%	69%
Central Counties	61.06	2.51	5.20	77%	72%	66%
Southern Counties	32.52	0.20	2.60	52%	32%	59%

Regional Wells Summary:


NORTHERN COUNTIES	NOV 2019 Elev	OCT 2019 Elev	NOV 2018 Elev	Change From OCT 2019	Change From NOV 2018	NOV Historical Low Normal	NOV Historical High Normal	Departure From Low Normal	NOV 2019 Percentile Rank	Period of Record Low	Record Low Date	Period of Record High	Record High Date
CE 14 Dunnellon Deep	43.43	44.59	42.60	-1.16	0.83	37.76	43.21	5.67	79%	31.94	MAY2012	50.74	MAR1998
Chassahowitzka 1 Deep	7.84	8.43	7.29	-0.59	0.55	6.27	7.32	1.57	90%	4.70	FEB1990	9.70	SEP2004
Inverness Dot Fldn	32.58	32.80	30.71	-0.22	1.87	28.01	32.17	4.57	86%	21.70	JUN2001	37.80	OCT1982
Mascotte Deep	100.60	101.02	99.75	-0.42	0.85	98.91	100.50	1.69	83%	93.94	JUN2000	102.66	SEP1988
North Locanto Deep	6.00	6.49	5.38	-0.49	0.62	4.36	5.55	1.64	85%	2.94	MAY2001	8.10	OCT1982
ROMP 103 Suwannee/Ocala	43.02	43.52	43.79	-0.50	-0.77	38.37	43.80	4.65	73%	37.53	JUN2017	46.62	SEP2018
ROMP 107 Ocala/Avon Park	15.32	16.12	14.63	-0.80	0.69	11.28	14.53	4.04	83%	8.08	AUG2007	19.78	NOV1982
ROMP 111 Ocala/Avon Park	50.05	50.54	48.93	-0.49	1.12	48.12	49.61	1.93	84%	44.22	JUL1992	53.33	SEP2004
ROMP 116 Avon Park	33.99	33.96	33.31	0.03	0.68	31.75	33.76	2.24	79%	29.24	MAY2012	39.28	OCT2004
ROMP 119 Avon Park	46.88	47.76	46.59	-0.88	0.29	43.26	45.81	3.62	89%	39.86	MAY2012	50.98	OCT2004
ROMP 120 Avon Park	47.52	48.66	47.48	-1.14	0.04	42.20	45.51	5.32	88%	38.71	MAY2012	52.24	MAR1998
ROMP 134 Ocala/Avon Park	53.66	54.68	53.90	-1.02	-0.24	43.69	48.31	9.98	97%	37.80	JUN2012	57.35	APR1998
ROMP 89 Ocala	92.28	93.21	90.71	-0.93	1.57	89.02	91.83	3.26	91%	82.46	JUN2000	94.93	DEC1997
ROMP 97 Avon Park	22.30	22.98	19.72	-0.68	2.58	16.10	21.16	6.20	85%	11.34	JUN2002	26.24	SEP2004
ROMP TR 124 Avon Park	3.94	4.29	3.30	-0.35	0.64	2.42	3.23	1.52	98%	0.77	SEP2004	8.06	SEP2016
ROMP TR 21-2 Ocala/Avpk	3.84	4.07	3.16	-0.23	0.68	2.25	3.27	1.59	92%	0.40	MAR1991	6.12	OCT1995
Sumter 13 JC 59 Up Fldn	42.28	42.85	41.91	-0.57	0.37	39.98	42.77	2.30	65%	36.52	MAY2012	47.01	JUN2003
Tidewater 1 FLDN	56.77	57.53	56.47	-0.76	0.30	53.15	56.65	3.62	76%	48.05	JUN2012	61.81	SEP1982
Webster City Fldn	84.14	84.85	82.47	-0.71	1.67	79.49	83.57	4.65	81%	74.16	MAY2012	88.77	SEP2005
Weeki Wachee Deep Repl	19.04	20.28	18.11	-1.24	0.93	15.29	19.36	3.75	71%	9.57	MAY2009	22.81	AUG1984


Regional Wells Summary (continued):


CENTRAL COUNTIES	NOV 2019 Elev	OCT 2019 Elev	NOV 2018 Elev	Change From OCT 2019	Change From NOV 2018	NOV Historical Low Normal	NOV Historical High Normal	Departure From Low Normal	NOV 2019 Percentile Rank	Period of Record Low	Record Low Date	Period of Record High	Record High Date
Bexley 2 Fldn	62.03	62.19	61.60	-0.16	0.43	60.21	61.82	1.82	87%	56.08	JUN2000	64.50	SEP2017
Coley Deep	84.72	85.46	83.74	-0.74	0.98	80.82	89.00	3.90	58%	60.68	JUN2000	90.99	OCT2004
Debuel Road Deep	56.30	57.27	56.16	-0.97	0.14	53.34	56.12	2.96	82%	46.48	APR2002	60.13	SEP1979
Hills State Park Deep	40.06	41.96	38.99	-1.90	1.07	37.38	39.33	2.68	91%	35.35	JUN2000	47.42	DEC1997
Lk Alftred Deep	129.39	129.87	128.08	-0.48	1.31	126.25	128.61	3.14	96%	119.85	MAY1974	131.18	MAR1998
Loughman Deep	90.35	90.71	89.39	-0.36	0.96	89.58	91.35	0.77	43%	85.90	MAY2001	93.23	OCT1979
Lykes Pasco Fldn	69.12	69.36	68.69	-0.24	0.43	63.71	68.09	5.41	85%	56.94	JUN2000	75.78	OCT2004
Masaryktown Deep	38.84	39.93	38.87	-1.09	-0.03	29.51	40.83	9.33	69%	21.89	AUG1994	50.09	OCT1982
Moon Lake Deep	31.58	31.84	31.02	-0.26	0.56	29.61	31.20	1.97	89%	26.15	JUN2000	34.89	AUG2015
Pasco 13 nr Drexel Fldn	72.02	72.79	71.92	-0.77	0.10	71.78	73.27	0.24	31%	68.00	JUN2001	77.14	JUL1960
Pinellas 665 Fldn	9.70	10.32	9.02	-0.62	0.68	9.06	10.97	0.64	55%	6.70	MAY2006	14.79	SEP1959
ROMP 123 Hawthorn/Ocala	13.18	9.86	12.97	3.32	0.21	4.72	14.72	8.46	73%	-29.47	MAY2000	33.56	FEB1998
ROMP 40 Swnn/AvPk	42.04	41.59	42.70	0.45	-0.66	33.29	42.93	8.75	70%	-4.15	JUN2000	57.37	FEB1998
ROMP 45 Avon Park	76.43	77.00	76.66	-0.57	-0.23	63.44	71.76	12.99	89%	33.90	JUN2000	84.44	OCT2004
ROMP 48 Tampa/Suwannee	37.34	35.99	37.72	1.35	-0.38	28.13	36.64	9.21	81%	-7.87	MAY2000	52.64	FEB1998
ROMP 50 Avon Park	7.24	8.25	8.68	-1.01	-1.44	3.10	7.02	4.14	78%	-13.05	MAY1981	14.95	AUG1982
ROMP 58 Ocala	105.08	105.88	101.12	-0.80	3.96	96.89	102.09	8.19	90%	89.38	JAN2010	111.01	DEC2005
ROMP 59 Swnn/AvPk	77.65	78.06	77.74	-0.41	-0.09	60.84	72.44	16.81	90%	33.33	MAY1981	85.92	OCT2004
ROMP 60 Ocala/Avon Park	77.18	77.19	77.52	-0.01	-0.34	57.61	71.93	19.58	87%	51.29	MAY2012	83.25	SEP2018
ROMP 66 Tampa	20.08	21.22	19.10	-1.14	0.98	16.79	18.96	3.29	93%	13.02	JUN2000	25.47	AUG2015
ROMP 76 U Fldn	130.58	131.24	129.18	-0.66	1.40	126.65	129.69	3.93	94%	121.88	JAN2010	132.92	SEP2004
ROMP 87 Avon Park	103.71	104.27	101.97	-0.56	1.74	101.14	102.96	2.57	91%	94.90	JUN2000	106.30	FEB1998
ROMP 88 Avon Park	105.57	105.50	103.51	0.07	2.06	102.53	104.16	3.04	95%	97.42	JUN2000	107.21	SEP2017
ROMP 93 Swnn/AvPk	74.07	74.82	73.75	-0.75	0.32	66.46	73.03	7.61	85%	59.03	JUN2001	76.56	AUG2018
ROMP DV-1 Suwannee	56.89	46.56	56.27	10.33	0.62	50.59	55.98	6.30	83%	12.06	JAN2010	65.72	FEB1998
ROMP TR 10-2 Tampa	10.36	11.02	10.33	-0.66	0.03	8.29	10.25	2.07	78%	6.25	MAY2000	14.00	SEP2004
ROMP TR 13-3 Avon Park	15.54	15.95	16.50	-0.41	-0.96	15.13	16.32	0.41	37%	10.16	JUL1987	18.79	AUG2015
SR 52 And CR581 Deep	74.03	75.34	73.60	-1.31	0.43	67.81	74.80	6.22	67%	56.96	JUN2001	79.44	AUG1965
SR 52 Deep W nr Fivay Jct	53.05	53.42	52.72	-0.37	0.33	51.67	52.88	1.38	88%	48.08	JUN2000	59.53	AUG2010
SR 577 Deep	92.65	93.37	91.20	-0.72	1.45	85.06	92.40	7.59	78%	72.76	JUN2000	98.51	MAR1998
Sanlon Ranch Fldn	99.98	99.61	99.66	0.37	0.32	86.35	95.83	13.63	90%	66.38	MAY1975	105.27	OCT2004
Tarpon Rd Deep	10.18	10.90	9.48	-0.72	0.70	9.82	10.78	0.36	47%	-4.43	MAY2018	13.48	AUG2015


Regional Wells Summary (continued):


SOUTHERN COUNTIES	NOV 2019 Elev	OCT 2019 Elev	NOV 2018 Elev	Change From OCT 2019	Change From NOV 2018	NOV Historical Low Normal	NOV Historical High Normal	Departure From Low Normal	NOV 2019 Percentile Rank	Period of Record Low	Record Low Date	Period of Record High	Record High Date
Big Slough Deep	32.20	32.81	33.33	-0.61	-1.13	32.42	33.67	-0.22	19%	26.85	MAY2006	36.12	OCT1995
Cargill FA-1 Fldn	74.58	75.01	74.86	-0.43	-0.28	62.09	71.67	12.49	93%	30.50	MAY1981	82.95	OCT2004
Edgeville 3 Deep	25.00	25.34	27.77	-0.34	-2.77	25.02	35.21	-0.02	25%	1.13	MAY2000	41.26	OCT1979
Englewood 14 Deep	5.57	6.44	5.68	-0.87	-0.11	3.66	6.19	1.91	61%	-0.97	FEB2001	10.51	SEP2003
Florida Pwr @ Piney Point	16.03	17.08	16.06	-1.05	-0.03	11.09	15.00	4.94	88%	-4.84	MAY1989	21.68	AUG2019
Kibler Deep	9.95	5.39	9.58	4.56	0.37	4.16	14.40	5.79	58%	-29.95	MAY2000	29.30	AUG1978
Manasota 14 Deep	18.11	18.16	18.00	-0.05	0.11	18.57	21.18	-0.46	14%	15.46	MAY2017	22.70	NOV1971
Marshell Deep	41.07	42.60	42.98	-1.53	-1.91	39.63	47.77	1.44	39%	8.96	JUN2000	55.24	MAR1964
ROMP 16 Ocala	46.64	47.35	46.39	-0.71	0.25	45.76	48.41	0.88	42%	28.94	JAN2001	51.21	SEP1995
ROMP 17 Up Fldn	44.80	45.62	46.01	-0.82	-1.21	43.69	46.68	1.11	53%	31.89	JUN2000	51.64	OCT1994
ROMP 19 West UFA Swnn	28.38	28.33	29.00	0.05	-0.62	23.24	29.36	5.14	65%	10.99	JUN2000	33.80	SEP2017
ROMP 19X UFA (SWNN)	33.80	33.71	34.19	0.09	-0.39	31.54	35.84	2.26	53%	19.28	JUN2000	39.92	OCT1994
ROMP 20 UFA (SWNN)	21.83	22.09	22.05	-0.26	-0.22	19.87	21.85	1.96	73%	11.99	MAY2007	26.66	SEP2017
ROMP 22 UFA (SWNN)	18.47	18.08	20.24	0.39	-1.77	14.68	20.15	3.79	68%	-3.71	MAY2000	30.18	FEB1998
ROMP 26 Swnn/AvPk	43.69	45.24	44.11	-1.55	-0.42	42.07	46.56	1.62	48%	19.48	JAN2010	51.28	OCT1979
ROMP 28X Swnn/AvPk	68.90	69.78	68.10	-0.88	0.80	67.87	70.36	1.03	46%	57.24	JAN2010	74.68	OCT1995
ROMP 30 Swnn/AvPk	46.14	48.64	48.81	-2.50	-2.67	41.62	50.10	4.52	53%	-0.20	JUN2000	60.52	MAR1998
ROMP 31 Swnn/AvPk	42.30	44.26	44.83	-1.96	-2.53	36.47	45.65	5.84	56%	-6.22	JUN2000	57.92	MAR1998
ROMP 32 Low Ocala/Avpk	25.28	27.21	28.67	-1.93	-3.39	20.45	31.64	4.83	47%	-17.74	JUN2000	44.73	FEB1998
ROMP 43XX Avon Park	87.91	88.93	88.89	-1.02	-0.98	85.69	89.66	2.22	48%	70.93	JAN2010	93.95	SEP2004
ROMP 9 UFA (SWNN)	42.08	42.52	42.42	-0.44	-0.34	41.37	42.91	0.71	53%	37.00	JAN2001	46.35	SEP2006
ROMP TR 1-2 Up Fldn	45.22	45.48	45.00	-0.26	0.22	44.67	45.46	0.55	54%	40.72	JUN2000	47.22	SEP2015
ROMP TR 3-1 Up Fldn	34.31	34.86	34.21	-0.55	0.10	33.35	34.13	0.96	81%	29.04	JUN2000	35.98	SEP2017
ROMP TR 5-1 Suwannee	19.85	19.33	19.54	0.52	0.31	18.62	20.14	1.23	62%	13.26	JUN2000	22.56	SEP2017
ROMP TR 5-2 UFA (SWNN)	25.68	24.78	26.36	0.90	-0.68	23.82	26.61	1.86	53%	13.75	MAY2006	31.10	OCT1994
ROMP TR 7-1 Tampa	18.97	19.37	19.28	-0.40	-0.31	17.47	19.36	1.50	67%	10.01	JUN2000	24.23	SEP2017
ROMP TR 7-4 Swnn/Ocala	14.10	14.77	15.62	-0.67	-1.52	10.93	15.32	3.17	69%	-3.55	MAY2000	24.35	AUG2019
Romp TR SA-1 UFS (SWNN)	9.88	10.77	9.75	-0.89	0.13	11.08	15.35	-1.20	12%	2.89	MAY2017	22.04	SEP1999
Sarasota Office Up Floridan	14.64	14.62	16.32	0.02	-1.68	14.75	25.74	-0.11	25%	-4.25	JUN2000	34.20	MAR1931
Verna T 0-1	14.53	12.74	16.49	1.79	-1.96	11.95	19.91	2.58	45%	-15.73	MAY2000	33.32	JAN1984

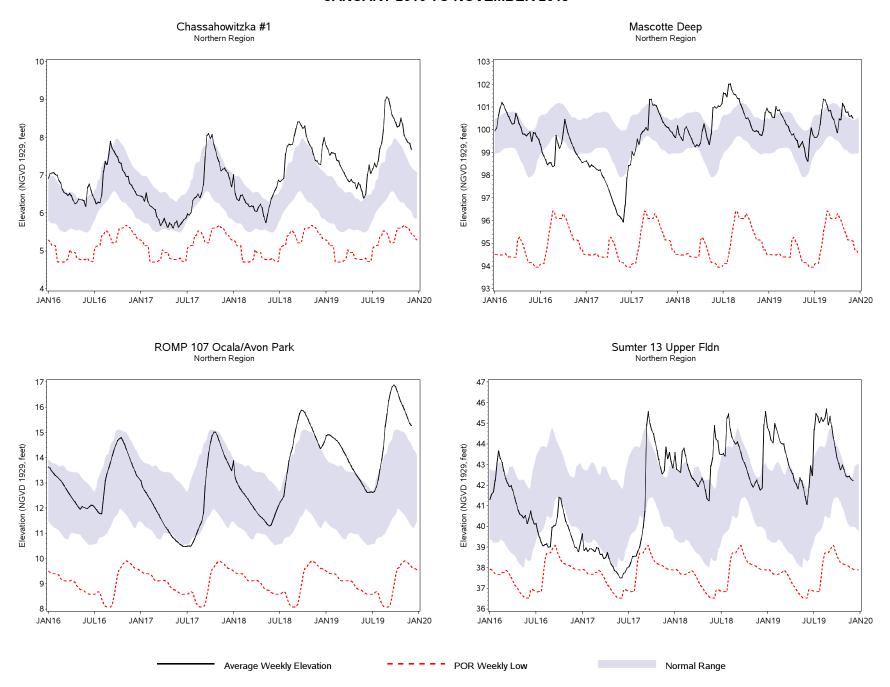


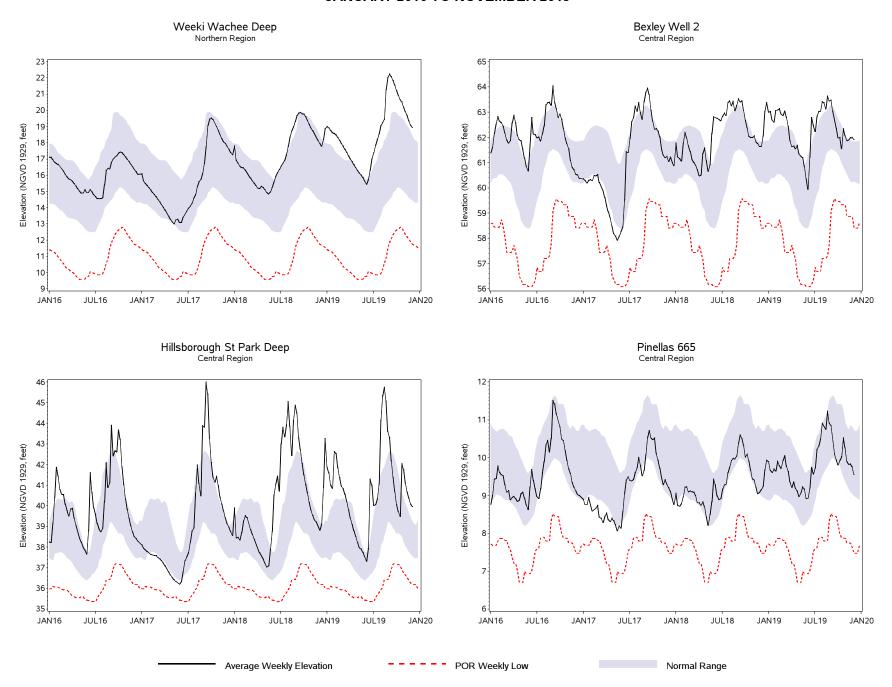


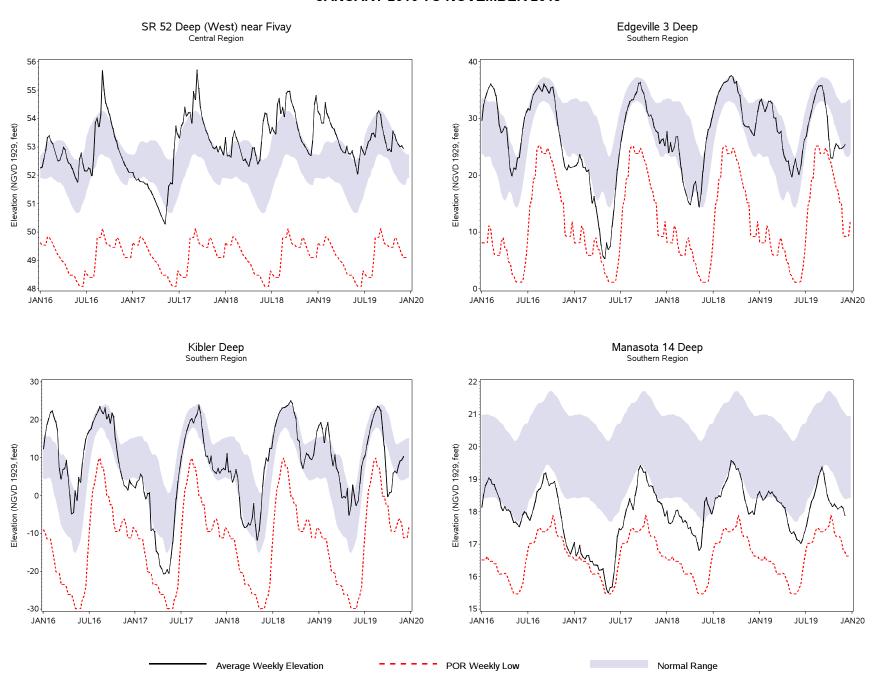

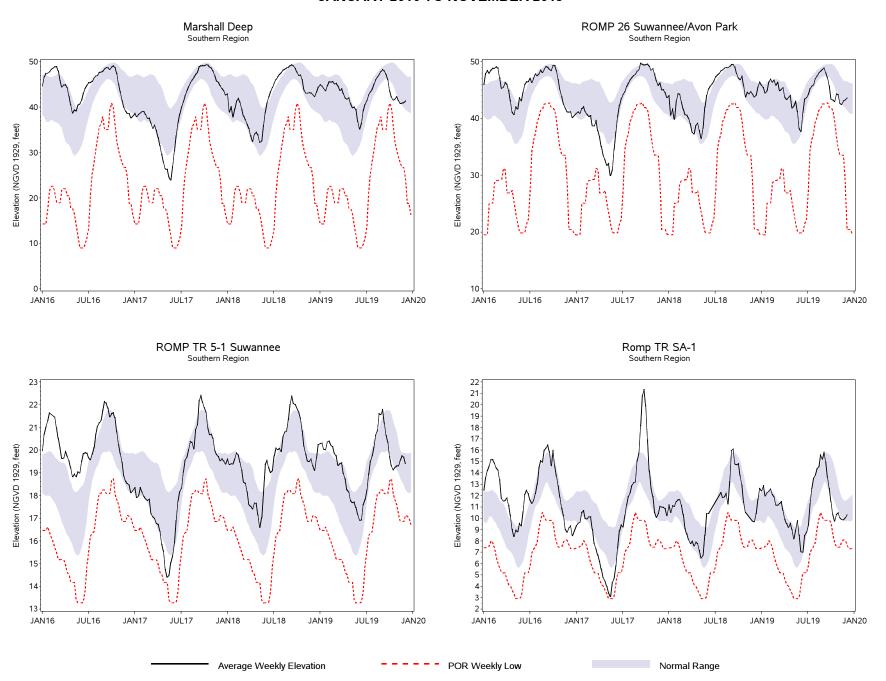

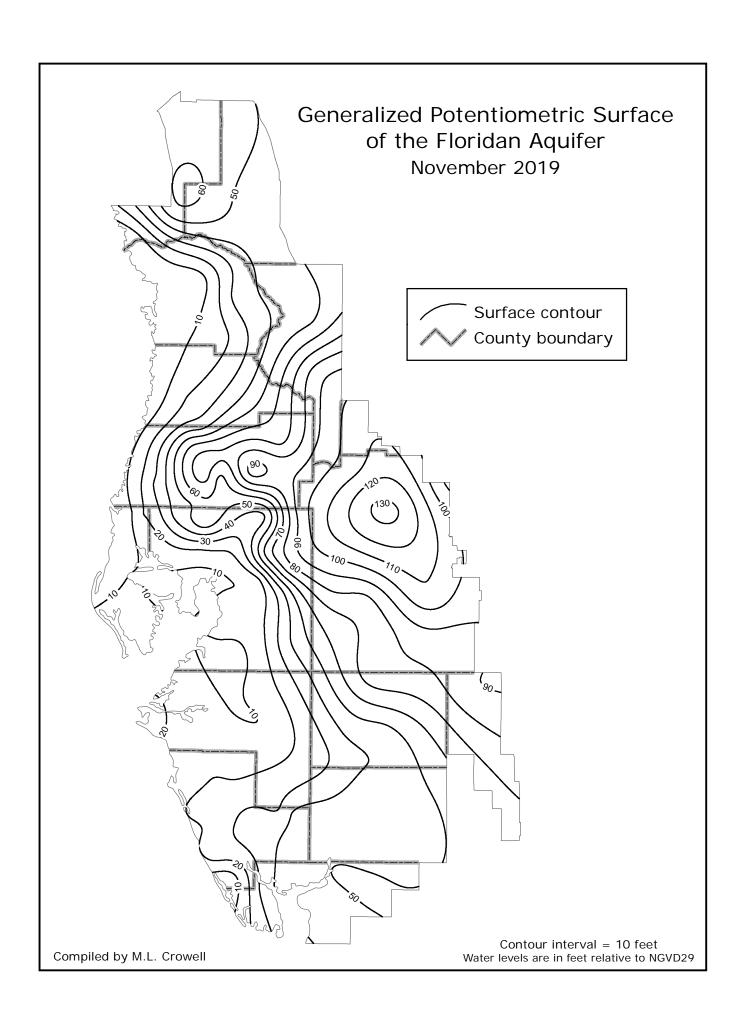

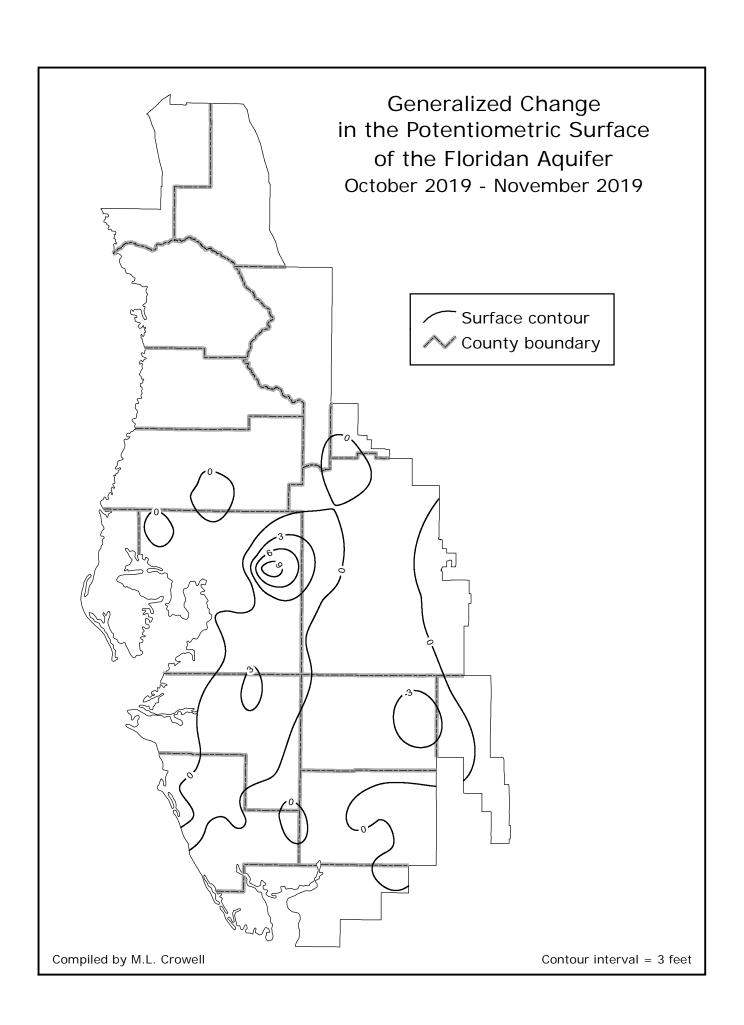

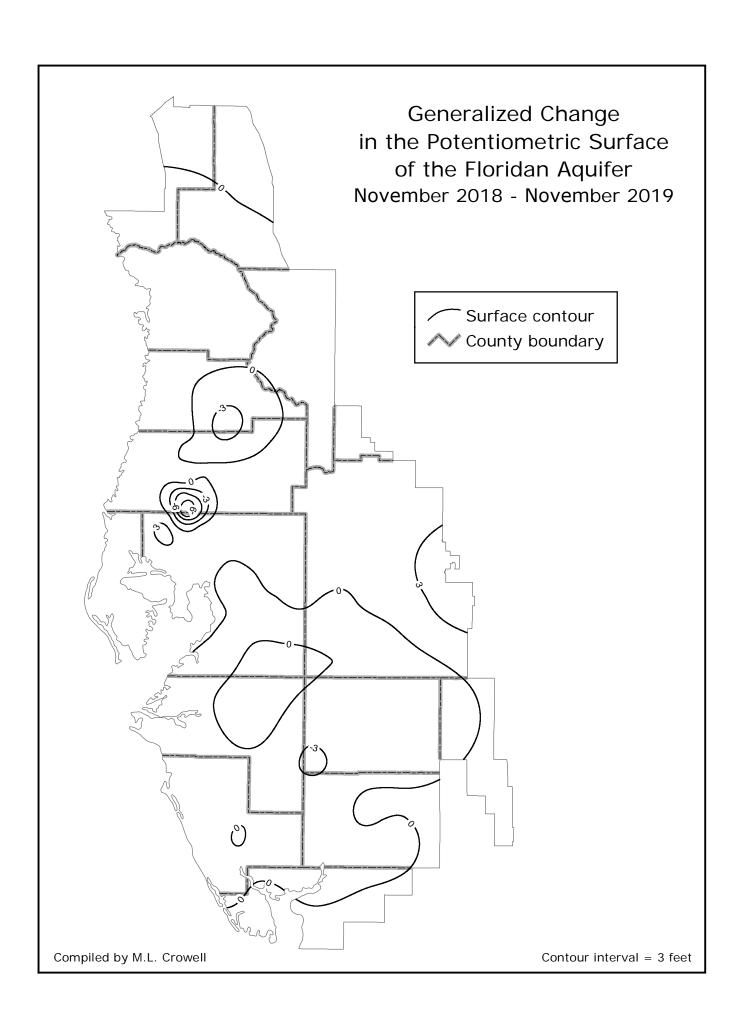

Public Supply Wellfields

Water levels are measured in 21 monitor wells (9 surficial, 12 intermediate and Floridan aquifer wells) located at nine public supply wellfields in the District. Thirteen of the 21 monitor wells have water levels measured monthly, two biweekly, and six weekly. Monthly data are tabulated to compare recent water levels to historical means.

In November, monthly analysis indicates that average water levels decreased in six of the 12 intermediate and Floridan wells and six of the 9 surficial wells. Average water levels measured in the intermediate and Floridan wells decreased 0.39 foot, while levels measured in surficial wells decreased 0.05 foot.

During November, annual analysis indicates average water levels in eight of the 12 intermediate and Floridan wells and eight of the 9 surficial wells were above last year's levels. Water levels measured in the intermediate and Floridan wells averaged 0.75 foot below last year's levels, while surficial water levels averaged 0.97 foot above November 2018 levels.

For November, average water levels in all 12 intermediate and Floridan wells and all 9 surficial wells were above the low normal level, compared to historical monthly levels. Water levels measured in the intermediate and Floridan wells averaged 7.06 feet above the low normal level, while levels in the surficial wells averaged 5.00 feet above the low normal level.

SUMMARY OF GROUNDWATER LEVELS IN REPRESENTATIVE WELLFIELD WELLS, NOVEMBER 2019

INT/FLORIDAN WELLS	NOV 2019 Elev	OCT 2019 Elev	NOV 2018 Elev	Change From OCT 2019	Change From NOV 2018	NOV Historical Low Normal	NOV Historical High Normal	Departure From Low Normal	Period of Record Low	Record Low Date	Period of Record High	Record High Date
Cosme-Odessa Cosme No. 3 Cross Bar WRW Cypress Crk TMR-1 Deep Cypress Crk TMR-3 Deep Eldridge-Wilde 11 Deep Eldridge-Wilde 2S Morris Bridge 3A Deep Section 21 Hills 13 Deep South Pasco 42 South Pasco SR 54 Deep Starkey Regional Verna 08	24.85	24.16	24.14	0.69	0.71	22.75	26.54	2.10	11.58	JUN2000	33.84	AUG2012
	53.89	54.34	53.67	-0.45	0.22	44.66	55.19	9.23	33.88	DEC1993	61.37	AUG1984
	64.55	65.39	62.26	-0.84	2.28	52.70	61.53	11.85	36.93	FEB2001	69.29	AUG2003
	62.70	62.62	61.84	0.08	0.86	51.08	59.83	11.62	34.22	FEB2001	67.18	SEP2004
	21.66	21.62	21.49	0.04	0.17	11.26	18.60	10.40	0.31	SEP1990	27.69	SEP2013
	20.21	20.68	19.65	-0.48	0.56	12.10	19.33	8.11	-1.05	JUN2000	25.44	SEP2013
	31.52	31.24	28.38	0.27	3.14	27.95	31.53	3.57	17.02	MAY2009	35.84	FEB1998
	45.32	45.52	45.38	-0.20	-0.06	34.99	42.33	10.33	21.54	JUN2002	49.60	AUG2012
	46.20	49.69	55.23	-3.49	-9.03	42.26	50.49	3.94	27.98	MAY2002	58.65	SEP2017
	50.45	52.69	56.14	-2.23	-5.69	45.94	53.32	4.51	33.49	MAY2002	59.26	AUG2012
	35.52	35.41	34.92	0.11	0.60	31.21	34.38	4.31	25.03	JUN2000	38.37	AUG2015
	11.65	9.89	14.45	1.76	-2.80	6.90	11.20	4.75	-24.32	MAY1989	26.68	FEB1998
SURFICIAL WELLS												
Cosme-Odessa IC-6 Cross Bar SERW Cypress Crk TMR-1 Shallow Cypress Crk TMR-3 Shallow Eldridge-Wilde 11 Shallow Morris Bridge 3A Shallow Section 21 Hills 13 Shallow South Pasco SR 54 Shallow Starkey 707	37.50	37.50	37.30	-0.01	0.19	36.17	37.64	1.33	33.03	MAR1991	42.95	AUG2015
	69.99	70.29	69.35	-0.30	0.64	68.93	69.65	1.06	59.80	SEP2007	71.41	AUG2018
	65.01	65.65	62.37	-0.64	2.64	57.63	64.13	7.38	39.89	DEC2000	69.24	AUG2018
	62.11	61.47	59.18	0.64	2.93	53.76	59.16	8.35	52.68	MAY1997	64.80	JUN2003
	27.53	27.01	26.90	0.52	0.63	18.10	24.26	9.43	10.77	JUN1994	31.72	JUL2015
	34.81	35.28	33.58	-0.47	1.23	32.62	34.63	2.19	24.86	MAY2009	39.03	DEC1997
	51.63	51.98	51.47	-0.35	0.16	41.22	50.59	10.41	33.81	MAY2001	53.82	AUG2012
	58.67	58.78	58.97	-0.11	-0.30	57.04	58.70	1.63	54.43	OCT1980	60.49	SEP1998
	31.05	30.78	30.42	0.27	0.63	27.85	30.14	3.20	22.70	JUN2000	34.18	AUG2015

Aquifer Resource Index

Aquifers are underground layers of rock and sand that hold water. In southwest Florida, more than 80 percent of the water supply comes from aquifers. The Aquifer Resource Index (ARI) was created to provide information to the media, residents, local governments and other interested parties about current ground-water conditions and how they compare to historical records. The underlying purpose of this index is to provide the public with a gauge of ground-water conditions in their area, so they can develop an understanding of the severity and cycles of drought and recovery

This ARI report has been modified to now reflect percentile values to compare current aquifer levels to historical levels during the same time of year on a scale of 0-100. For example, if the regional groundwater level is at the 50th percentile, it means that half of the historical levels for this time of year were higher and half were lower than the current level.


To determine the ARI percentile value for each geographic region (indicated below), the percentile values of the monitor wells located within that region are averaged. Monitor wells with an adequate and reliable period-of-record to calculate weekly percentiles were selected for the network. There are 20 wells located in the northern region, 32 wells located in the central region and 30 wells located in the southern region, that are currently used for determining the regional percentiles. A total of 82 wells District-wide are used for the ARI Network (see index map in Appendix).

Weekly Aquifer Resource Index Level (Percentile)

Report Date	Northern Region	Central Region	Southern Region
11/06/2019	83	74	35
11/13/2019	83	77	43
11/20/2019	83	77	50
11/30/2019	82	77	54

Note: Any regional percentile value that falls on or between the 25th and 75th percentile is considered "normal." Less than the 25th would be considered below-normal," while above the 75th would be considered "above-normal."

AQUIFER RESOURCE INDEX* November 2019

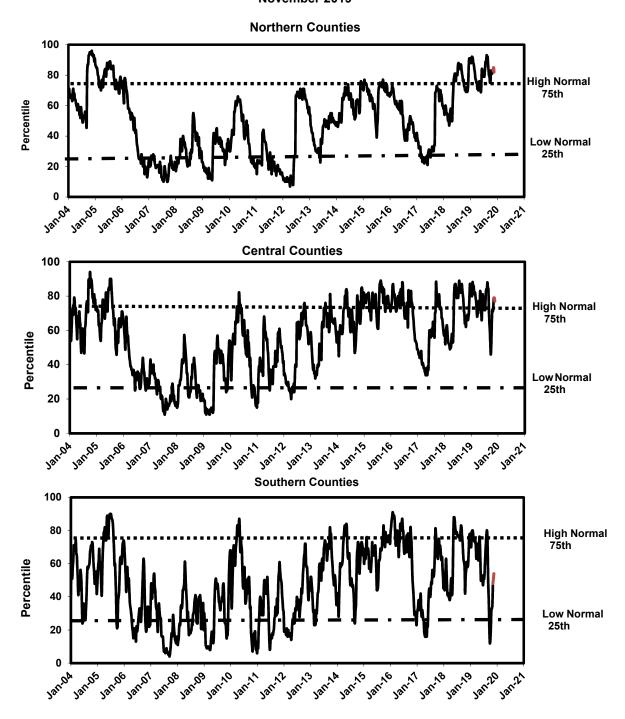

^{*}Average Groundwater Level Relative to Low Normal, NGVD 29 Compiled By Hannah Kolb

PUBLIC SUPPLY SURFACE WATER RESERVOIRS

CITY OF TAMPA RESERVOIR (Hillsborough River Basin): Constructed in 1924, it is located on the Hillsborough River in Hillsborough County. It is the fourth largest public supply surface water facility in the District. It is the main water supply for the City of Tampa and has a total storage capacity of 1.7 billion gallons (bg). The total usable volume is 1.4 bg, when the reservoir elevation is 22.5 feet NGVD. It is an in-stream reservoir with a depth that ranges between nine and 22 feet. Given this amount of water, it is estimated that a 15-day supply of water is available from this facility over an extended dry period. During periods of low water due to drought conditions, the facility is permitted to pump water from two alternate sources. The first of these two sources is the Tampa Bypass Canal. Water is pumped over the water control structure at S-161 into the Hillsborough River above the dam. The second source is Sulphur Springs, just downstream from the dam, where water is captured at the spring and pumped back behind the dam. Withdrawals from both sources are in strict accordance with pumpage schedules as outlined in the facility's water use permit. When water levels fall below 12 feet NGVD, water cannot be withdrawn because the reservoir level is below the intake pipes. The permitted average daily withdrawal for this facility is 82 mgd, with a permitted maximum daily withdrawal of 104 mgd. Currently, ground water wells are not used to augment this facility. The minimum producible level is 9.00 feet.

PEACE RIVER RESERVOIRS - PEACE RIVER/MANASOTA REGIONAL WATER

SUPPLY AUTHORITY (Peace River Basin): The Peace River reservoirs are located in southwestern DeSoto County. They are an off-stream reservoir system consisting of two reservoirs that store surface water captured from the Peace River during wet periods. The first reservoir, Reservoir 1, was built in 1980 and encompasses approximately 85 acres, has a water depth of approximately 31 feet, and has a total storage capacity of approximately 625 million gallons. The second reservoir, Reservoir 2, was built in 2009, covers about 616 acres, has a water depth of approximately 35 feet, and has a total storage capacity of about 6.0 billion gallons. The PRMRWSA facility ranks as the third largest in the District for total volume storage and supplies water to Charlotte, DeSoto, Manatee and Sarasota counties and to the City of North Port. The facility also uses an aquifer storage recovery (ASR) system for storing treated water pumped from the river. The minimum producible level at Reservoir 1 is Elevation 8.0 feet, while Reservoir 2 is Elevation 27.0 feet.

MANATEE RESERVOIR (Manasota Basin): Completed in 1967 by the damming of the Manatee River, the Manatee Reservoir is the second largest of the six surface-water public supply facilities within the District. Located in Manatee County, this in-stream facility has a storage capacity of 7.5 bg. The service area of the Manatee reservoir is the unincorporated portions of Manatee County, the City of Palmetto and Anna Maria Island, and also the Sarasota SUD#1. This reservoir provides essentially all public supply for Manatee County, with the exception of the City of Bradenton. The total size of this reservoir is 1800 acres with an average depth of 15 feet. With the reservoir full, the facility has approximately 220 days of available water supply. When the surface-water elevation drops below 21.0 feet, water cannot be withdrawn because levels are below the facility's intakes. The permitted average daily withdrawal for this facility is 34.9 mgd, with a permitted peak monthly quantity of 41.9 mgd. The minimum producible level is 21.00 feet.

EVERS RESERVOIR (Manasota Basin): Constructed in 1935 and expanded in 1985, it is located on the Braden River in Manatee County. This is the fifth largest public supply reservoir in the District. Its main service area is the City of Bradenton and approximately 500 customers outside the city. It has a total storage capacity of 1.5 bg. The total size of the facility is 300 acres with an average depth of 12 feet. Water ceases to flow over the dam when the level falls below 3.84 feet NGVD. During the 1985 drought, while expansion of the facility was taking place, the water level dropped to one foot below sea level and demand was still met. Given a completely full reservoir, with no water going over the spillway, it is estimated the facility could supply water for approximately 260 days, with no input from rainfall. The permitted average daily withdrawal for this facility is 6.95 mgd, with a permitted peak monthly quantity of 8.13 mgd. Currently, ground-water wells are not used to augment this facility.

SHELL CREEK RESERVOIR (Peace River Basin): Shell Creek Reservoir, located in Charlotte County, is the sixth largest surface water system within the District. This system was built in 1964 and services the City of Punta Gorda as well as unincorporated areas surrounding the city limits. The Shell Creek Reservoir is fed by two primary tributaries, Shell Creek from the east and Prairie Creek from the northwest. The total drainage area at Hendrickson Dam is 373 square miles. It has a surface area of 800 acres and depths of 10 to 12 feet. Total storage capacity is 765 mg. Even with this low volume of water, personnel at this facility estimate they have approximately 125 days of available supply with no input from rainfall. Water ceases to flow across the weir when surface elevations drop below 5.0 feet NGVD, and at 3.7 feet NGVD water quality becomes a major concern. When surface elevations drop below 1.75 feet NGVD, the water is below the intakes and withdrawal of water is not possible. The permitted average daily withdrawal by this facility is 5.358 mgd, with a permitted peak monthly quantity of 6.901 mgd. The minimum producible level is 1.70 feet.

C.W. BILL YOUNG REGIONAL RESERVOIR - TAMPA BAY WATER (Alafia River Basin): Constructed in early 2005, it is the largest public supply surface water facility in the District. Located in southern Hillsborough County, it is an off-stream reservoir that stores surface water skimmed from the Tampa Bypass Canal and Alafia and Hillsborough Rivers. It services the Tampa Bay region through the Tampa Bay Water regional public supply water distribution system. The reservoir has an estimated storage capacity of 15.0 bg when the water level elevation is 136.5 feet NGVD. The reservoir is approximately 45 feet deep, two miles long and one mile wide, and encompasses a land area of approximately 1,100 acres. It reportedly has the capacity to provide 25 percent of the Tampa Bay region's public supply needs for six months and can supply the Tampa Bay regional surface water treatment plant at full capacity for 227 days.

Reservoirs

Water-level data for the seven reservoirs are obtained weekly from the USGS, Manatee County Utilities Department, Peace River/Manasota Regional Water Supply Authority, or Tampa Bay Water. The last weekly water-level value of the month is indicated in this report. The values reported are provisional and subject to revision.


In November, five of the seven reservoirs monitored for this report recorded water-level decreases, compared to last month. The Evers, Lake Manatee, Bill Young, Peace River No. 1 and Shell Creek reservoirs posted water level decreases of 0.16 foot, 0.36 foot, 0.33 foot, 1.50 feet and 0.05 foot, respectively. The Hillsborough River and Peace River No. 2 reservoirs posted water level increases of 0.13 and 1.00 feet, respectively, compared to last month.

SUMMARY OF WATER LEVELS IN WATER SUPPLY RESERVOIRS (ELEVATION IN FEET, NGVD 29)


				Change	Change
	2019	2019	2018	from Prior	from Prior
RESERVOIR	October	November	November	Month	Year
Evers					
City of Bradenton	3.94	3.78	3.80	-0.16	-0.02
Hillsborough					
City of Tampa	22.68	22.81	22.60	0.13	0.21
Lake Manatee					
Manatee County	40.00	39.64	38.48	-0.36	1.16
C.W. Bill Young Regional					
Tampa Bay Water	135.82	135.49	134.35	-0.33	1.14
Peace River					
PRMRWSA Reservoir #1	25.00	23.50	25.30	-1.50	-1.80
PRMRWSA Reservoir #2	61.90	62.90	62.90	1.00	0.00
Shell Creek					
City of Punta Gorda	5.15	5.10	5.18	-0.05	-0.08

NGVD - National Geodetic Vertical Datum Reported data are provisional and subject to revision.


EVERS RESERVOIRCity of Bradenton

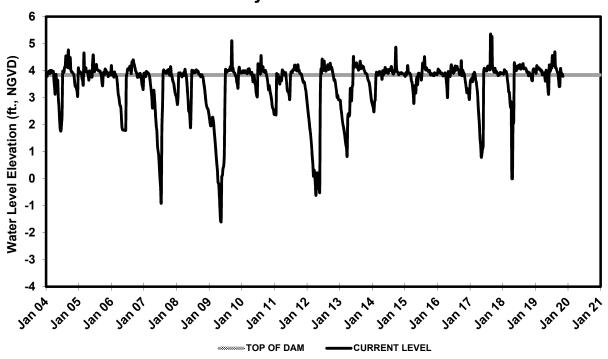


HILLSBOROUGH RESERVOIR City of Tampa

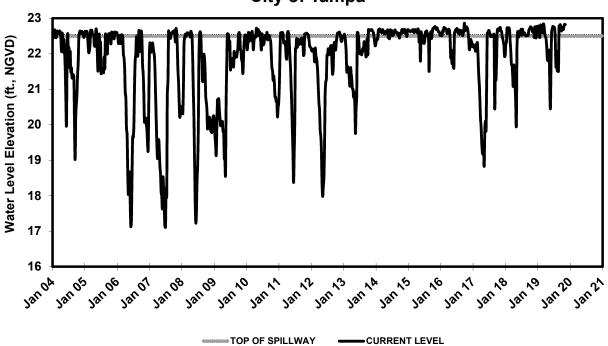


LAKE MANATEE RESERVOIR Manatee County

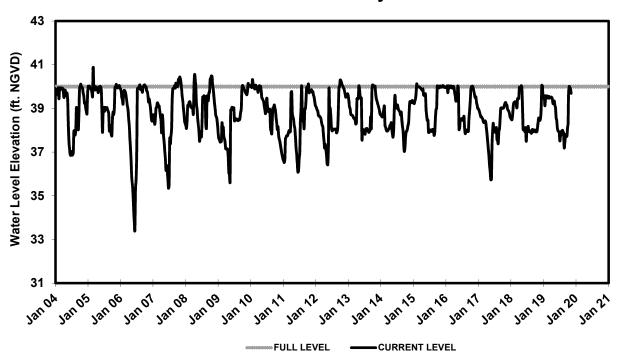




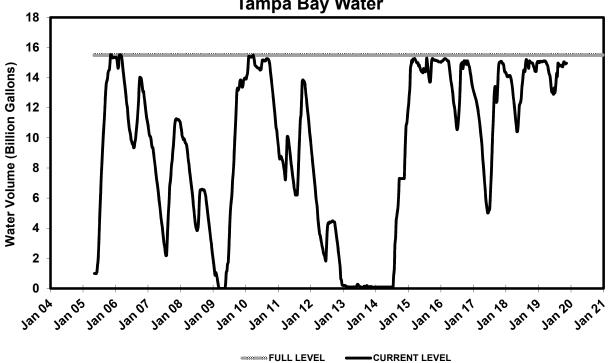


PEACE RIVER RESERVOIR No. 1 Peace/Manasota Reg. Water Supply

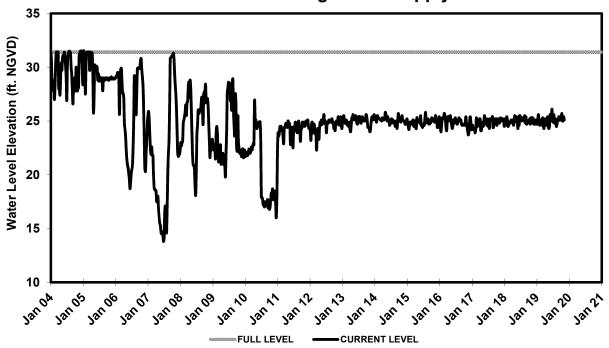


PEACE RIVER RESERVOIR No. 2 Peace/Manasota Reg. Water Supply

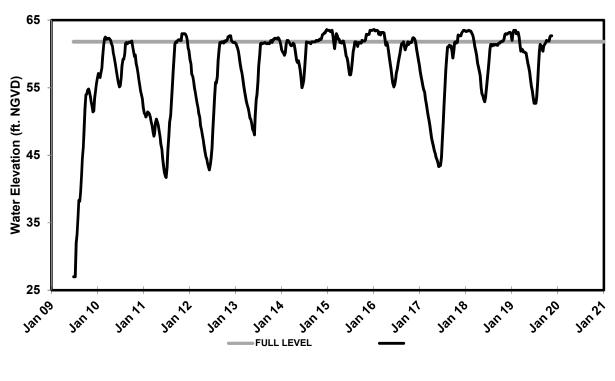

SHELL CREEK RESERVOIR City of Punta Gorda

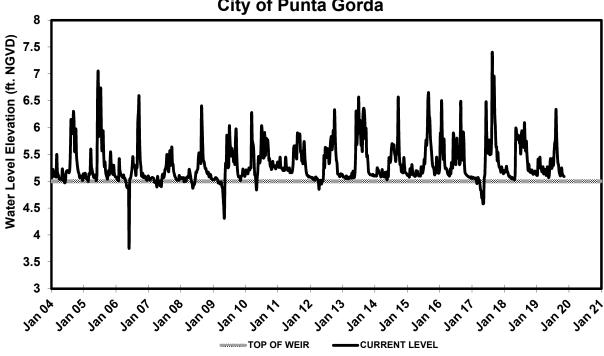



Rainfall percentiles by interval and region, inches.


Rainfall percentiles by interval and region, inches.										
Rainfall Interval	Region	10 TH Percentile (P10)	25 th Percentile (P25)	50 th Percentile (P50)	75 th Percentile (P75)	90 th Percentile (P90)				
Annual total	Northern	43.19	48.35	54.01	58.86	63.46				
Annual total	Central	41.45	46.10	52.16	57.28	63.82				
Annual total	Southern	42.05	46.25	52.19	57.82	63.43				
Annual total	District	43.12	47.22	52.19	57.46	62.83				
	Northern	15.27	18.42	23.79	28.72	32.10				
Dry season total	Central	13.32	16.42	23.79	26.86	30.83				
Dry season total Dry season total	Southern	12.35	15.68	21.24	26.23	30.03				
Dry season total	District	13.71	16.79	22.02	27.22	29.70				
Wet season total	Northern	22.79	25.44	29.45	33.43	38.16				
Wet season total	Central	23.22	25.79	29.71	34.86	39.22				
Wet season total	Southern	24.37	27.37	30.58	35.88	41.68				
Wet season total	District	23.92	27.16	29.97	34.71	38.93				
				2.45						
January total	Northern Central	0.73	1.50		4.00	5.30				
January total		0.72	1.21	2.23	3.72	4.60				
January total	Southern	0.39	0.93	1.88	3.31	4.93				
January total	District	0.65	1.17	2.10	3.55	4.90				
February total	Northern	0.82	1.42	2.82	4.08	5.76				
February total	Central	0.60	1.12	2.38	4.17	5.50				
February total	Southern	0.36	1.26	2.21	3.63	4.93				
February total	District	0.73	1.32	2.38	3.94	5.12				
March total	Northern	1.00	2.06	3.15	5.43	7.21				
March total	Central	0.97	1.66	2.96	4.95	6.44				
March total	Southern	0.81	1.28	2.56	4.29	6.68				
March total	District	1.09	1.64	3.04	4.86	6.92				
April total	Northern	0.65	1.33	2.38	3.95	5.52				
April total	Central	0.51	0.96	1.87	3.44	5.59				
April total	Southern	0.48	1.19	2.04	3.75	4.66				
April total	District	0.65	1.20	2.24	3.72	5.12				
May total	Northern	1.18	1.95	3.21	4.67	6.92				
May total	Central	0.87	1.64	2.73	4.58	5.75				
May total	Southern	1.17	1.91	3.36	5.22	6.75				
May total	District	1.23	2.04	3.24	4.87	6.29				
June total	Northern	4.60	5.47	7.27	8.63	10.16				
June total	Central	3.65	4.79	6.46	8.27	9.48				
June total	Southern	4.22	5.63	7.44	9.06	12.06				
June total	District	4.55	5.46	7.24	8.60	10.99				
July total	Northern	5.36	6.75	8.29	9.16	11.52				
July total	Central	4.89	5.98	8.35	10.05	11.44				
July total	Southern	5.68	6.94	8.11	9.50	10.99				
July total	District	5.60	6.83	8.19	9.57	10.58				
August total	Northern	5.44	6.30	7.31	9.72	11.33				
August total	Central	5.52	6.55	7.90	9.62	12.03				
August total	Southern	5.55	6.22	7.70	8.97	10.49				
August total	District	5.65	6.52	7.70	9.37	10.67				
September total	Northern	2.79	4.18	5.84	8.04	11.35				
September total	Central	3.19	5.11	6.46	8.50	11.69				
September total	Southern	4.30	5.46	6.94	9.33	11.85				
September total	District	3.85	5.21	6.53	8.62	11.65				
October total	Northern	0.63	1.27	2.46	4.40	6.15				
October total	Central	0.69	1.39	2.61	4.03	6.13				
October total	Southern	0.92	1.78	2.73	4.27	6.04				
October total	District	1.06	1.57	2.80	4.15	5.79				

Rainfall percentiles by interval and region, inches (continued).

Rainfall Interval	Region	10 TH Percentile (P10)	25 th Percentile (P25)	50 th Percentile (P50)	75 th Percentile (P75)	90 th Percentile (P90)
November total	Northern	0.38	0.71	1.63	2.88	4.56
November total	Central	0.25	0.47	1.42	2.82	4.33
November total	Southern	0.40	0.64	1.46	2.56	3.82
November total	District	0.37	0.63	1.53	2.73	4.39
December total	Northern	0.54	1.06	2.06	3.71	5.19
December total	Central	0.48	0.84	1.89	3.03	4.87
December total	Southern	0.45	0.77	1.56	2.63	4.18
December total	District	0.54	0.89	1.86	2.92	4.34


Rainfall characterization ranges

Characterization	Range	Corresponding Rainfall Percent of Normal (approximate)
Very dry	Less than the P10 rainfall	Less than 80 percent of normal
Drier than normal	P10 to P24 rainfall	80 to 90 percent of normal
Normal	P25 to P75 rainfall	90 to 110 percent of normal
Wetter than normal	P76 to P90 rainfall	110 to 120 percent of normal
Very Wet	Greater than the P90 rainfall	Greater than 120 percent of normal

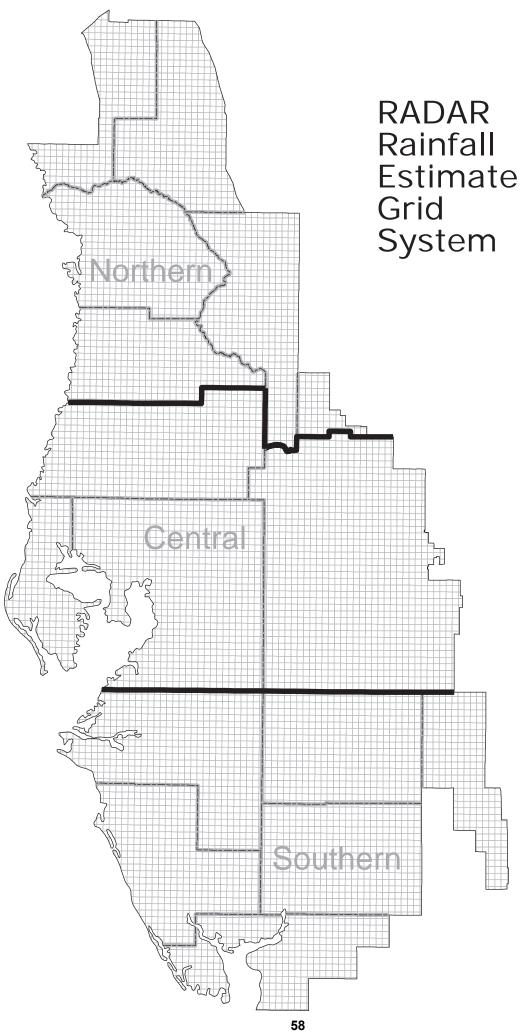





Selected Lake Monitoring Stations Northern Region

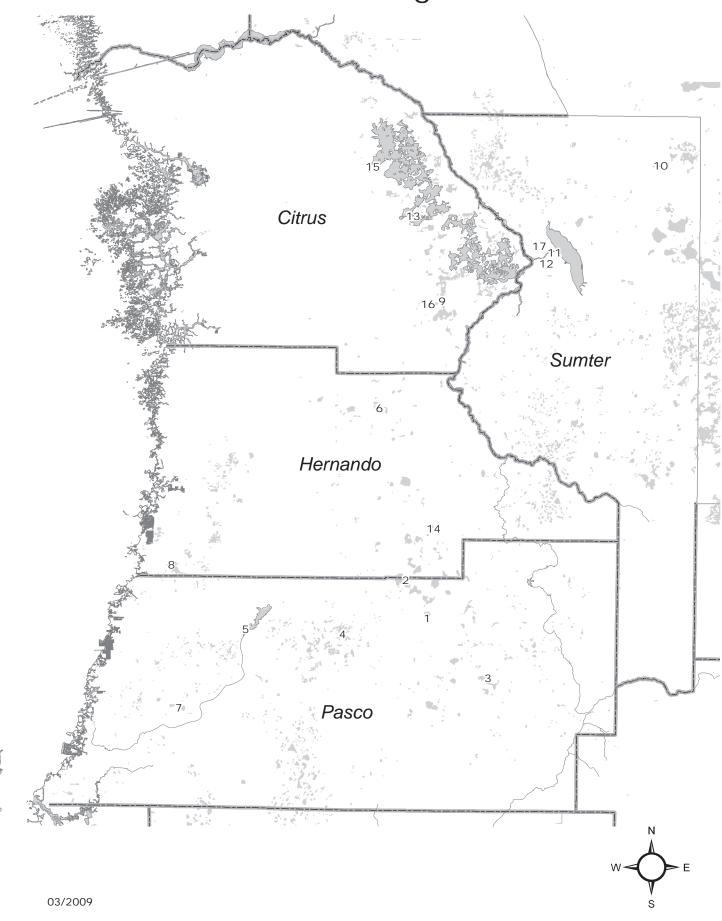

Selected Lake Monitoring Stations Tampa Bay Region

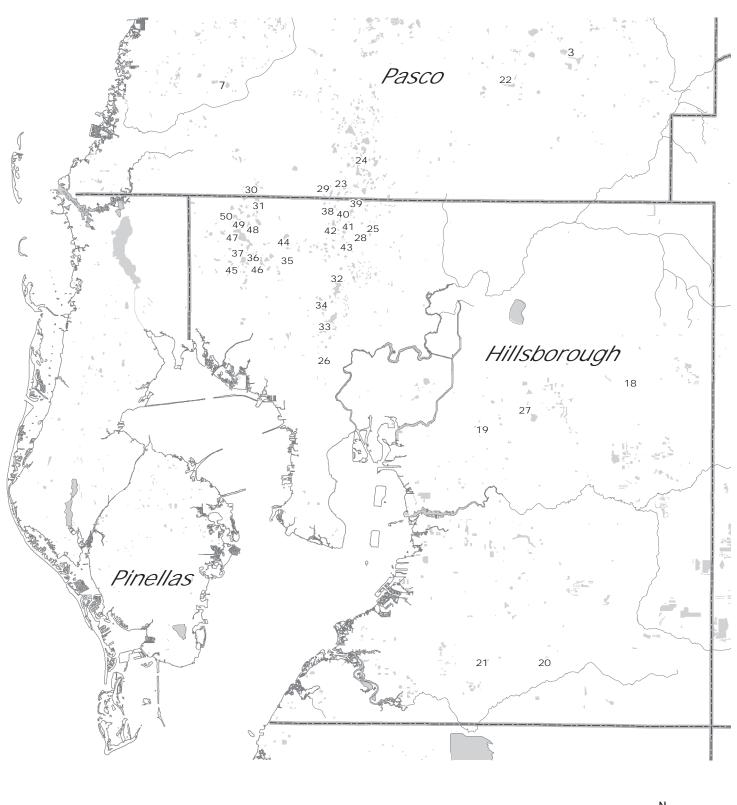


Selected Lake Monitoring Stations Polk Uplands Region

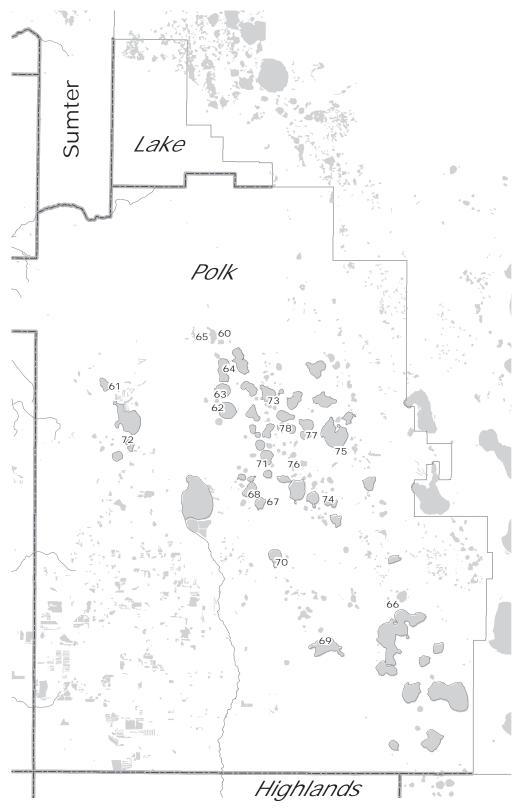



Selected Lake Monitoring Stations Lake Wales Ridge Region

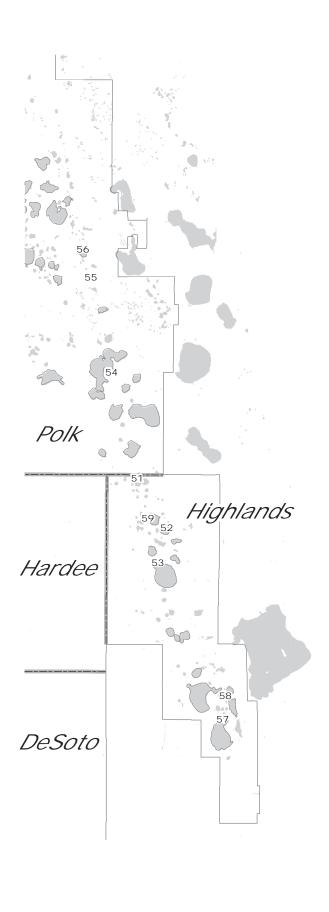



Selected Lake Monitoring Stations

Northern Region

Site Name
Lake Iola
Hancock Lake
Lake Pasadena
Big Fish Lake
Crews Lake
Lake Lindsey
Moon Lake
Hunters Lake
Tsala Apopka at Floral City
Lake Miona
Pana Vista Outlet River
Outlet River at Panacoochee
Tsala Apopka at Inverness
Spring Lake
Tsala Apopka at Hernando
Little Lake (Consuella)
Lake Panasoffkee

Tampa Bay Region

Man ID	Sita Nama	Map ID	Site Name
Map ID	Site Name		<u></u>
18	Mud (Walden) Lake	40	Lake Brooker
19	Gornto Lake	41	Cooper Lake
20	Carlton Lake	42	Lake Thomas
21	Lake Wimauma	43	Brant Lake
22	King Lake near San Antonio	44	Turkey Ford Lake
23	Lake Linda	45	Church Lake
24	Lake Padgett	46	Horse Lake
25	Keene Lake	47	Lake Alice
26	Egypt Lake	48	Lake Calm
27	Long Pond	49	Keystone Lake
28	Lake Stemper	50	Crescent Lake
29	Camp Lake		
30	Lake Ann (Parker)		
31	Lake Hiawatha		
32	Platt Lake		
33	Lake Carroll		
34	Bay Lake		
35	Lake LeClare		
36	Little Lake		
37	Rainbow Lake		
38	Lake Harvey		
39	Deer Lake		


Selected Lake Monitoring Stations

Lake Wales Ridge Region

<u>Map ID</u>	<u>Site Name</u>
51	Trout Lake
52	Lake Letta
53	Lake Jackson at Sebring
54	Crooked Lake near Babson Park
55	Lake Starr
56	Lake Annie
57	Lake Placid
58	Lake Clay
59	Lake Lotela

Polk Uplands Region

Map ID	Site Name
60	Lake Helene
61	Lake Gibson
62	Lake Ariana
63	Lake Arietta
64	Lake Juliana
65	Clearwater Lake
66	Blue Lake South
67	Lake McLeod
68	Eagle Lake
69	Lake Buffum
70	Lake Garfield
71	Lake Howard
72	Lake Bonny
73	Lake Alfred
74	Lake Ruby
75	Lake Hamilton
76	Lake Otis
77	Lake Fannie
78	Lake Conine

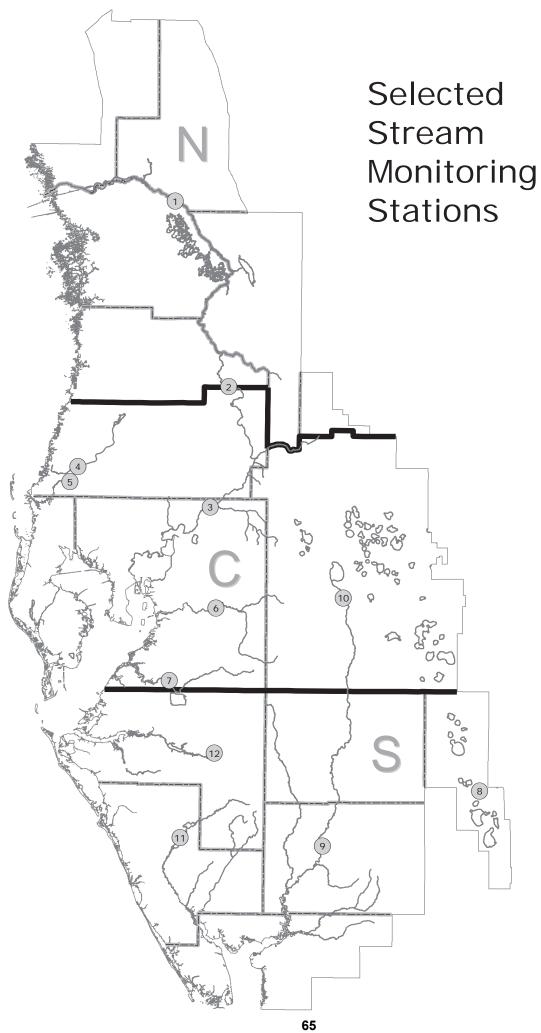



Selected Stream Monitoring Stations

Map ID	Site Name
1	Withlacoochee River near Holder
2	Withlacoochee River at Trilby
3	Hillsborough River near Zephyrhills
4	Pithlachascotee River near New Port Richey
5	Anclote River near Elfers
6	Alafia River at Lithia
7	Little Manatee River near Wimauma
8	Josephine Creek near DeSoto City
9	Peace River at Arcadia
10	Peace River at Bartow
11	Myakka River near Sarasota
12	Manatee River near Myakka Head

STREAM MONITORING STATIONS

WITHLACOOCHEE RIVER (Northern Region)

Total length: 157 miles

Headwaters: NW Polk and southern Sumter Counties

Elevation: 135 feet

Tributaries: Little Withlacoochee, Big Gant Canal, Jumper Creek, Shady

Brook, Outlet River of Lake Panasoffkee, Leslie Heifner Canal, Orange State Canal, Tsala Apopka Outfall Canal and Rainbow

Springs.

Mouth: Gulf of Mexico, Citrus County

Average fall: 0.9 feet/mile Drainage area: 2000 square miles

Holder Station

County: Marion Period-of-record: 1928

Location: 38 miles upstream from mouth

Avg daily discharge: 1036.3 cfs Runoff per year: 10.36 inches

Max of monthly avg discharge: 7096.3 cfs in 04/1960
Min of monthly avg discharge: 111.8 cfs in 07/1992
Drainage area: 1825 square miles

Trilby Station

County: Hernando Period-of-record: 1928

Location: 93 miles upstream from mouth

Avg daily discharge: 336.3 cfs Runoff per year: 6.73 inches

Max of monthly avg discharge: 4254.7 cfs in 09/1933
Min of monthly avg discharge: 6.1 cfs in 07/1992
Drainage area: 570 square miles

ANCLOTE RIVER (Central Region)

Total length: 27.5 miles

Headwaters: South-central Pasco County, west of Land O Lakes

Elevation: 65 feet

Tributaries: South Branch and Hollin Creek Mouth: South Branch and Hollin Creek Gulf of Mexico, Pasco County

Average fall: 2.4 feet/mile Drainage area: 113 square miles

Elfers Station

County: Pasco Period-of-record: 1946

Location: 16 miles upstream from mouth

Avg daily discharge: 65.1 cfs
Runoff per year: 12.20 inches

Max of monthly avg discharge: 633.8 cfs in 09/1988
Min of monthly avg discharge: 1.4 cfs in 05/1981
Drainage area: 72.5 square miles

HILLSBOROUGH RIVER (Central Region)

Total length: 55 miles

Headwaters: Southeast Pasco County

Elevation: 77 feet

Tributaries: Crystal Springs, Blackwater Creek, Flint Creek, Trout Creek,

Cypress Creek, Curiosity Creek and Sulphur Springs

Mouth: Hillsborough Bay Average fall: 1.4 feet/mile Drainage area: 690 square miles

Zephyrhills Station

County: Hillsborough

Period-of-record: 1939

Location: 40 miles upstream from mouth

Avg daily discharge: 244.2 cfs Runoff per year: 15.05 inches

Max of monthly avg discharge: 2284.5 cfs in 12/1997 Min of monthly avg discharge: 47.1 cfs in 05/1994 Drainage area: 200 square miles

PITHLACHASCOTEE RIVER (Central Region)

Total length: 41 miles

Headwaters: Crews Lake and Masaryktown area in central Pasco and

southern Hernando Counties

Elevation: 120 feet

Mouth: Gulf of Mexico

Average fall: 2.9 feet/mile

Drainage area: 191 square miles

New Port Richey Station:

County: Pasco Period-of-record: 1963

Location: 10.5 miles upstream from mouth

Avg daily discharge: 27.9 cfs Runoff per year: 27.11 inches

Max of monthly avg discharge: 329.4 cfs in 09/1988

Min of monthly avg discharge: 0.0 cfs

Drainage area: 180 square miles

ALAFIA RIVER (Central Region)

Total length: 24 miles

Headwaters: Western Polk and eastern Hillsborough Counties

Tributaries: North and South Prongs, Lithia Springs, and Buckhorn Creek.

Elevation: 30 feet

Mouth: Tampa Bay

Average fall: 1.5 feet/mile

Drainage area: 420 square miles

Lithia Station:

County: Hillsborough

Period-of-record: 1932

Location: 16 miles upstream from mouth

Avg daily discharge: 339.7 cfs Runoff per year: 13.59 inches

Max of monthly avg discharge: 4185.4 cfs in 09/1933 Min of monthly avg discharge: 13.0 cfs in 05/1945 Drainage area: 335 square miles

LITTLE MANATEE RIVER (Central Region)

Total length: 39 miles

Headwaters: Southeast Hillsborough County

Tributaries: Carlton Branch, the South Fork, Dug Creek and Cypress Creek.

Elevation: 130 feet

Mouth: Tampa Bay

Average fall: 3.4 feet/mile

Drainage area: 225 square miles

Wimauma Station:

County: Hillsborough

Period-of-record: 1939

Location: 15 miles upstream from mouth

Avg daily discharge: 171.4 cfs Runoff per year: 15.68 inches

Max of monthly avg discharge: 1443.7 cfs in 07/1945 Min of monthly avg discharge: 3.8 cfs in 05/45 Drainage area: 149 square miles

JOSEPHINE CREEK (Southern Region)

Total length: 12 miles

Headwaters: Lake Josephine in central Highlands County

Elevation: 80 feet

Mouth: Lake Istokpoga in Highlands County

Average fall: 3.5 feet/mile
Drainage area: 143 square miles

DeSoto City Station:

County: Highlands Period-of-record: 1946

Location: 4.9 miles upstream of mouth

Avg daily discharge: 74.2 cfs Runoff per year: 8.90 inches

Max of monthly avg discharge: 769.9 cfs in 09/1960 Min of monthly avg discharge: 1.1 cfs in 05/56 Drainage area: 109 square miles

MANATEE RIVER (Southern Region)

Total length: 45 miles

Headwaters: Four corners area Hillsborough, Polk, Hardee and manatee Counties.

Elevation: 130 feet
Mouth: Tampa Bay
Average fall: 2.9 feet/mile
Drainage area: 330 square miles

Myakka Head Station:

County: Manatee Period-of-record: 1966

Location: 36 miles upstream from mouth

Avg daily discharge: 69.6 cfs Runoff per year: 14.62 inches

Max of monthly avg discharge: 529.7 cfs in 09/1994 Min of monthly avg discharge: 0.5 cfs in 04/75 Drainage area: 65.3 square miles

MYAKKA RIVER (Southern Region)

Total length: 54.1 miles

Headwaters: Western Hardee and Eastern Manatee Counties
Tributaries: Howard Creek, Deer Prairie, and Big Slough Canal

Elevation: 105 feet

Mouth: Charlotte Harbor Average fall: 1.9 feet/mile Drainage area: 540 square miles

Sarasota Station:

County: Sarasota Period-of-record: 1936

Location: 36 miles upstream from mouth

Avg daily discharge: 250.5 cfs Runoff per year: 15.03 inches

Max of monthly avg discharge: 2467.2 cfs in 09/1947 Min of monthly avg discharge: 0.0 cfs numerous times

Drainage area: 229 square miles

PEACE RIVER (Central and Southern Region)

Total length: 120 miles

Headwaters: Green Swamp in northern Polk County through Lake Hancock, Winter Haven

chain of lakes, and Lake Hamilton.

Tributaries: Peace Creek Canal, Saddle Creek, Charlie Creek, Prairie Creek, Horse Creek,

Joshua Creek and Shell Creek. Elevation: 110 feet

Mouth: Charlotte Harbor Average fall: 1 feet/mile

Drainage area: 2300 square miles

Arcadia Station (Southern Region):

County: Desoto Period-of-record: 1931

Location: 36 miles upstream from mouth

Avg daily discharge: 1078.9 cfs Runoff per year: 10.79 inches

Max of monthly avg discharge: 9876.0 cfs in 09/1933

Min of monthly avg discharge: 51.6 cfs 05/85
Drainage area: 1367 square miles

Bartow Station (Central Region):


County: Polk Period-of-record: 1939

Location: 105 miles upstream from mouth

Avg daily discharge: 224.1 cfs Runoff per year: 6.72 inches

Max of monthly avg discharge: 2261.5 cfs in 09/1960

Min of monthly avg discharge: 6.4 cfs 05/90 Drainage area: 390 square miles

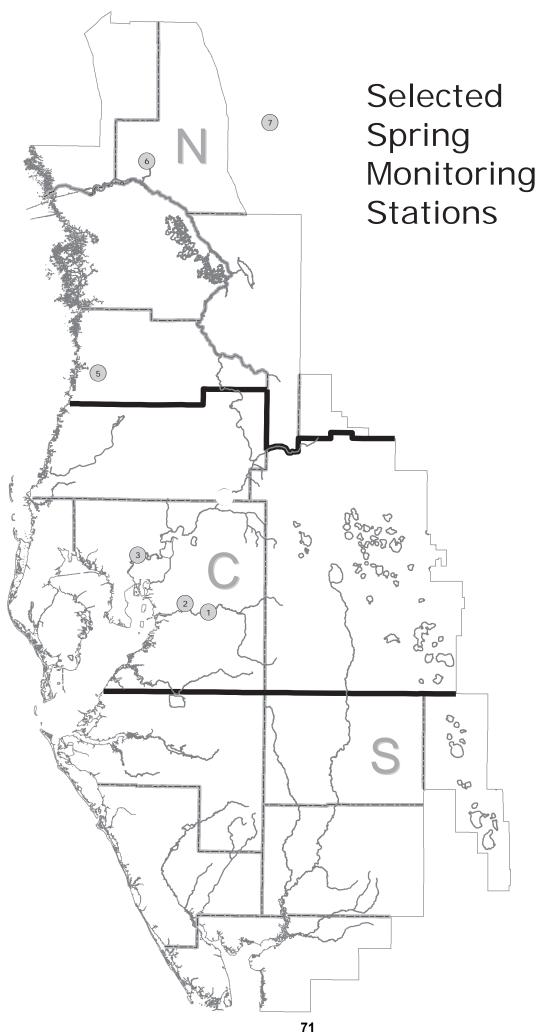



Selected Spring Monitoring Stations

Map ID	<u>Site Name</u>
1	Lithia Main Spring
2	Buckhorn Main Spring
3	Sulphur Springs at Sulphur Springs
5	Weeki Wachee River near Brooksville
6	Rainbow Springs near Dunnellon
7	Silver Springs near Ocala

SPRINGS MONITORING STATIONS

RAINBOW SPRINGS (Northern Region)

County: Marion

Basin: Withlacoochee River

1st Magnitude:

Discharge measurement location: 5 mi downstream from head of springs Discharge contributes to: Rainbow River, Withlacoochee River

Public Access: Yes Period-of-record: 1965

Non-recording gage Gage: Maximum daily mean: 1061 cfs in 09/1988 Minimum daily mean: 489 cfs in 06/2000

SILVER SPRINGS (Northern Region)

County: Marion

Basin: Ocklawaha River

Magnitude:

Discharge measurement location: 4 to 5 mi downstream from head of springs Discharge contributes to:

Silver Springs River, Ocklawaha River,

St. Johns River

Public Access: Yes Period-of-record: 1932

Water-stage recorder Gage: Maximum daily mean: 1290 cfs in 10/1960 Minimum daily mean: 432 cfs in 07/2000

WEEKI WACHEE SPRINGS (Northern Region)

County: Hernando Basin: **Coastal Rivers**

1st Magnitude:

Discharge measurement location: 1 mi downstream from head of springs

Discharge contributes to: Weeki Wachee River

Public Access: Yes Period-of-record: 1993

Gage: Water-stage

Maximum daily mean: 229 cfs in 03/1998 Minimum daily mean: 101 cfs in 06/1994

SULPHUR SPRINGS (Central Region)

County: Hillsborough
Basin: Hillsborough River

Magnitude: 2nd

Discharge measurement location: 300 ft downstream from gage

Discharge contributes to: Hillsborough River

Public Access: Yes Period-of-record: 1956

Gage: Water-stage recorder Maximum daily mean: 145 cfs in 03/1960

Minimum daily mean: 0 cfs for various days throughout the

period-of-record

BUCKHORN SPRINGS (Central Region)

County: Hillsborough Basin: Alafia River

Magnitude: 2nd

Discharge measurement location: Difference between discharge measurements

of Buckhorn Creek made 25 ft upstream from and 100 ft downstream from Buckhorn Springs

Discharge contributes to: Buckhorn Creek, Alafia River

Public Access: No Period-of-record: 1987

Gage: Water-stage recorder
Maximum daily mean: 21.9 cfs in 02/1989
Minimum daily mean: 2.7 cfs in 06/1987

LITHIA SPRINGS: (Central Region)

County: Hillsborough Basin: Alafia River

Magnitude: 2nd


Discharge measurement location: 50 feet downstream from main pool

Discharge contributes to:

Alafia River

Public Access: Yes Period-of-record: 1934


Gage: Water-stage recorder
Maximum daily mean: 83.4 cfs in 10/1967
Minimum daily mean: 6.3 cfs in 02/1989

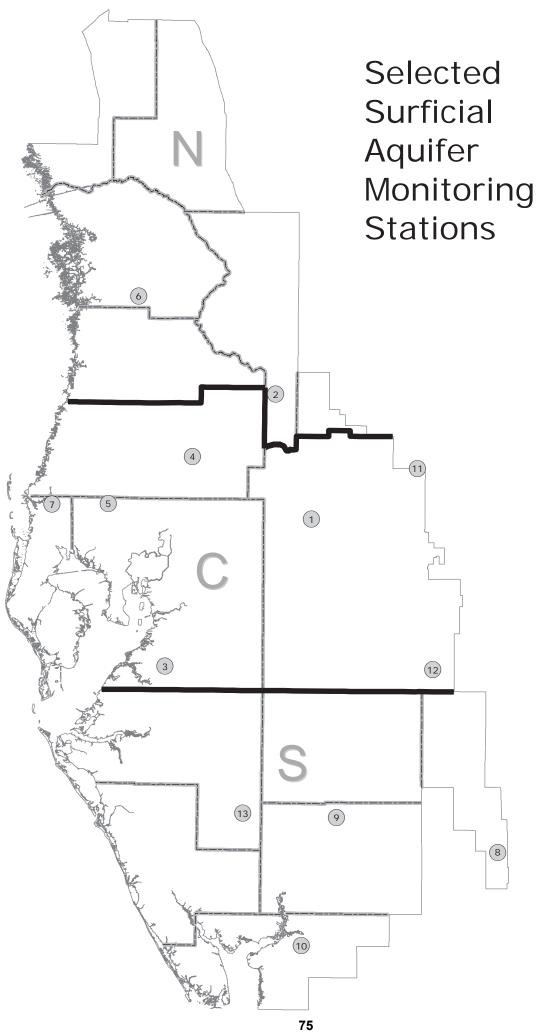




Selected Surficial Aquifer Monitoring Stations

<u>Map ID</u>	<u>Site Name</u>
1	State Road 33/Combee Road Shallow
2	Green Swamp L12B Shallow
3	ROMP 50 Surficial
4	State Road 577 Shallow
5	Lutz-Lake Fern Shallow
6	Lecanto 2 Shallow
7	Tarpon Road Shallow
8	Bairs Den Surficial
9	ROMP 26 Surficial
10	State Road 74 (77-Foot) Shallow
11	Loughman Shallow
12	USGS P-48 Shallow
13	Edgeville 4 Shallow

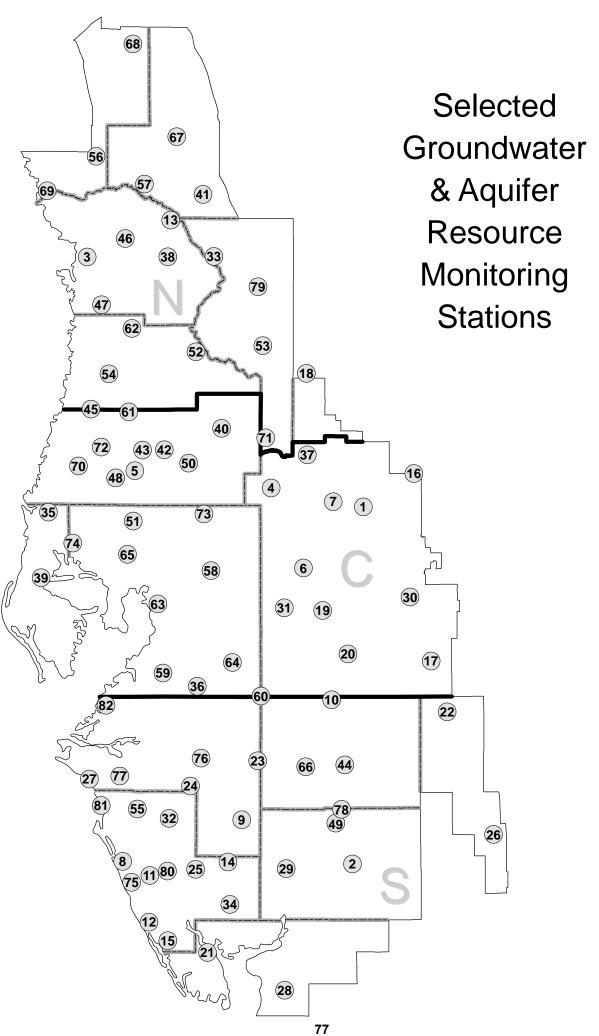


Select Groundwater & Aquifer Resource Monitoring Stations

Map ID	<u>Site Name</u>	Map ID	Site Name
1	Lake Alfred Deep nr Lake Alfred	49	ROMP 26 U Fldn Aq Monitor
2	ROMP 16 U Fldn Aq Monitor	50	SR 577 Deep
3	ROMP TR 21-2 U Fldn Aq Chloride Monitor	51	Debuel Road Deep
4	ROMP 87 U Fldn Aq (Avpk) Monitor	52	ROMP 103 U Fldn Aq Monitor
5	Pasco 13 nr Drexel Fldn	53	Webster City Fldn
6	Sanlon Ranch Fldn	54	Weeki Wachee Fldn Repl
7	ROMP 76 U Fldn Aq Monitor	55	Sarasota Service Office U Fldn Aq Monitor
8	ROMP 20 U Fldn Aq (Swnn) Monitor	56	Tidewater 1 Fldn
9	Edgeville 3 Deep	57	CE 14 Dunnellon Deep
10	Cargill FA-1 Fldn	58	DV-1 U Fldn Aq (Swnn) Monitor
11	ROMP TR 5-2 U Fldn Aq (Swnn) Monitor	59	ROMP 50 U Fldn Aq (Avpk) Chloride Monitor
12	Manasota 14 Deep	60	ROMP 40 U Fldn Aq Monitor
13	ROMP 116 U Fldn Aq Monitor	61	Masaryktown Deep
14	Big Slough Deep	62	ROMP 107 U Fldn Aq Monitor
15	Englewood 14 Deep	63	ROMP TR 10-2 U Fldn Aq Monitor
16	Loughman Deep	64	ROMP 48 U Fldn Aq (Tmpa/Swnn) Monitor
17	Coley Deep	65	ROMP 66 U Fldn Aq Monitor
18	Mascotte Deep (L-0062)	66	ROMP 31 U Fldn Aq Monitor
19	ROMP 59 U Fldn Aq Interface Monitor	67	ROMP 120 U Fldn Aq Monitor
20	ROMP 45 U Fldn Aq (Avpk) Monitor	68	ROMP 134 U Fldn Aq (Ocal-Avpk-Oldm) Monitor
21	ROMP TR 3-1 U Fldn Aq Monitor	69	ROMP TR 124 U Fldn Aq Monitor (Avpk) 2
22	ROMP 43XX U Fldn Aq Monitor	70	Moon Lake Deep
23	ROMP 32 U Fldn Aq (Avpk) Monitor	71	ROMP 89 U Fldn Aq Monitor
24	Verna Test 0-1	72	SR 52 Deep West nr Fivay Junction
25	ROMP 19X U Fldn Aq (Swnn) Monitor	73	Hillsborough River State Park Parking Lot Deep
26	ROMP 28X U Fldn Aq Monitor	74	ROMP TR 13-3 U Fldn Aq Monitor
27	ROMP TR 7-1 L Arca Aq Interface Monitor	75	ROMP TR 5-1 U Fldn Aq Sulfate Monitor
28	ROMP TR 1-2 U Fldn Aq Monitor	76	Kibler Deep
29	ROMP 17 U Fldn Aq (Swnn) Monitor	77	ROMP TR 7-4 U Fldn Aq (Swnn) Monitor
30	ROMP 58 U Fldn Aq Monitor	78	Marshall Deep (USGS)
31	ROMP 60 U Fldn Aq (Avpk) Monitor Repl	79	ROMP 111 U Fldn Aq Monitor
32	ROMP 22 U Fldn Aq (Swnn) Monitor	80	ROMP 19 U Fldn Aq (Swnn) Monitor
33	Sumter 13 JC 59 Up Fldn Repl	81	ROMP TR SA-1 U Fldn Aq (Swnn) Monitor
34	ROMP 9 U Fldn Aq (Swnn) Monitor	82	Florida Power Fldn at Piney Point
35	Tarpon Road Deep		
36	ROMP 123 Htrn As/U Fldn Aq Monitor		
37	ROMP 88 U Fldn Aq Monitor		
38	Inverness DOT Fldn		
39	Pinellas 665 Fldn		
40	Lykes Pasco Fldn		
41	ROMP 119 U Fldn Aq Sulfate Monitor		
42	SR 52 And CR 581 Deep		
43	ROMP 93 U Fldn Aq Monitor		
44	ROMP 30 U Fldn Aq Monitor		
45	ROMP 97 U Fldn Aq Monitor		
46	North Lecanto Deep		
47	Chassahowitzka 1 Deep		
48	Bexley 2 Fldn		

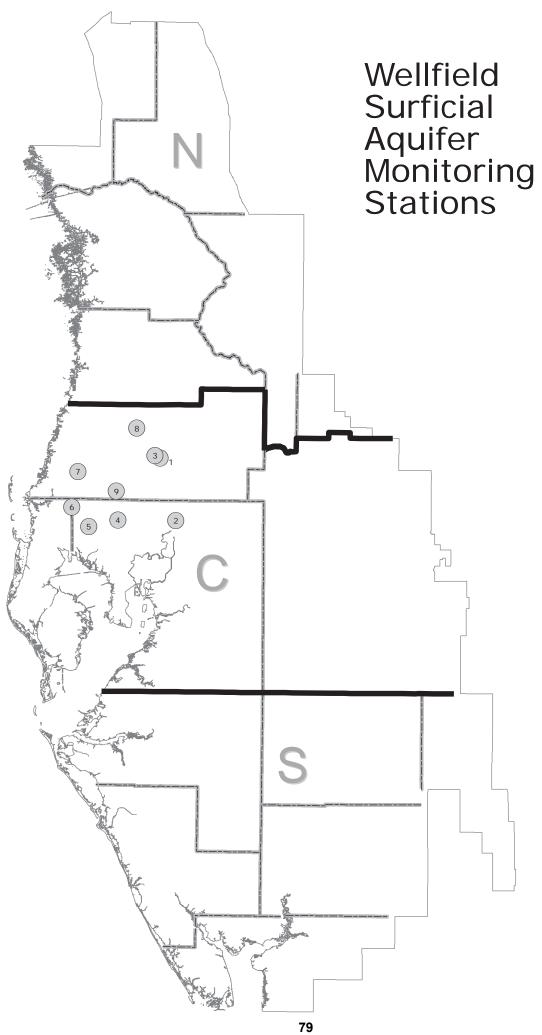



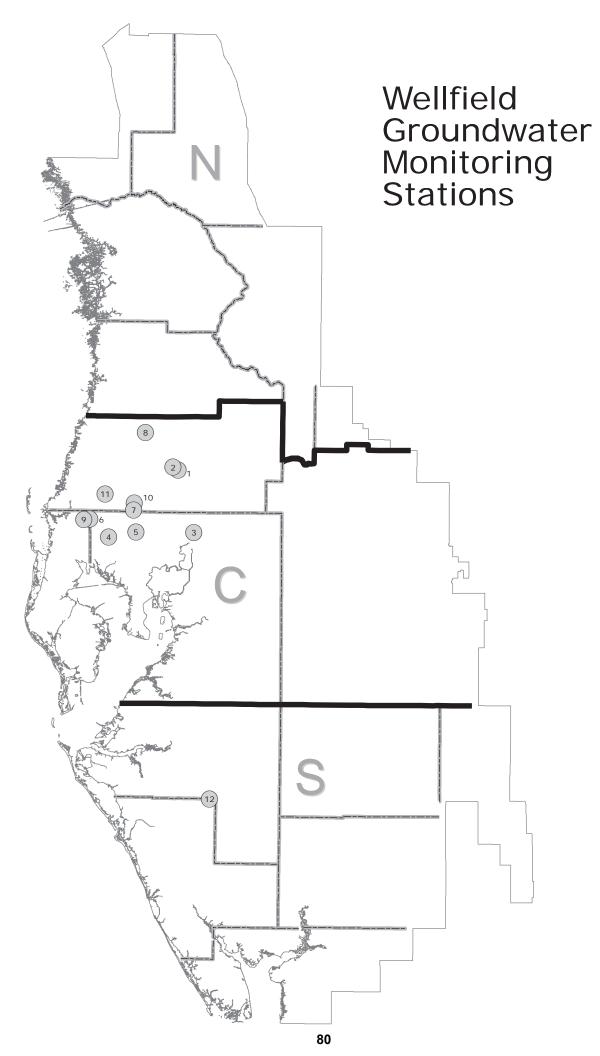

Wellfield Groundwater Monitoring Stations

<u>Map ID</u>	<u>Site Name</u>
1	Cypress Creek TMR-1 Deep
2	Cypress Creek TMR-3 Deep
3	Morris Bridge 3A Floridan
4	Cosme 3 Floridan
5	St. Pete Hillsboro 13 Deep
6	Eldridge-Wilde 11 Floridan
7	St. Pete 42 Deep
8	Cross Bar WRW Floridan
9	Eldridge-Wilde 2S Deep
10	State Road 54 Deep
11	Starkey Regional Floridan
12	Verna 08 Deep

Wellfield Surficial Aquifer Monitoring Stations

Map ID	Site Name
1	Cypress Creek TMR-1 Shallow
2	Morris Bridge 3A Surficial
3	Cypress Creek TMR-3 Shallow
4	St. Pete Hillsboro 13 Shallow
5	St. Pete IC-6 Shallow
6	Eldridge-Wilde 11 Surficial
7	Starkey 707 Shallow
8	Cross Bar SERW Shallow
9	State Road 54 Shallow

